


# Aprisa SR+

## SMART, SECURE POINT-TO-MULTIPOINT RADIO VHF, 220 MHz, UHF and 900 MHz licensed bands



Smart, secure, industry-leading speed licensed point-to-multipoint SCADA communications for industrial monitoring and control for the electricity, water, oil and gas industries

- **High capacity:** to meet the growing number of data-intensive applications in the SCADA environment, the Aprisa SR+ provides data rates of up to 216 kbit/s in 50 kHz licensed channels.
- **Secure:** with its defense in depth approach, including AES encryption, authentication, address filtering and user access control including RADIUS, the Aprisa SR+ protects against vulnerabilities and malicious attacks.
- **Future-proof:** the Aprisa SR+ supports multiple serial and Ethernet interfaces in a single, compact form factor, and is standards-based for long term incorporation into SCADA networks while protecting the legacy investment in serial devices.
- **Advanced L2/L3 capabilities:** selectable L2 Bridge or L3 Router modes, with VLAN, QoS and micro-firewall filtering to support narrow bandwidth channels and mission critical traffic while meeting increasing security and IP network policy requirements.
- **Adaptable:** the Aprisa SR+ integrates into a range of network topologies, with each unit configurable as a master station, repeater or remote station; connect multiple RTUs / PLCs to a single radio.
- **Flexible interfaces:** the data interfaces can be configured for serial or Ethernet operation; a range of options are supported, including two serial and two Ethernet, one serial and three Ethernet, or four Ethernet ports.
- **Link efficiency:** Adaptive Coding and Modulation (ACM) and forward error correction maintains the integrity of the wireless connection while an effective channel access scheme and IP routing ensures efficient transfer of data across the Aprisa SR+ network.
- **Reliable and robust:** the Aprisa SR+ requires no manual component tuning and maintains its high power output and performance over a wide temperature range.
- **Easily managed:** an easy to use GUI supports local element management via HTTPS and remote element management over the air and SNMP support allows network-wide monitoring and control via a variety of supported third party network management systems.

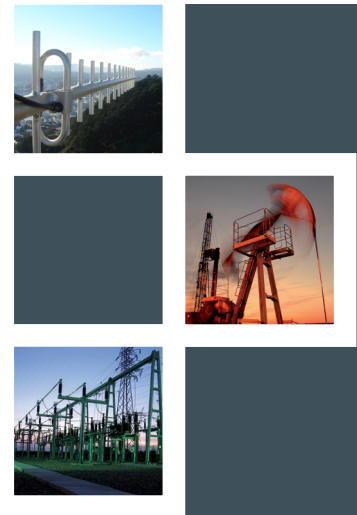

### The Aprisa SR+ in brief

- VHF, 220 MHz, UHF and 900 MHz licensed bands
- RS-232 and IEEE 802.3 protocols with multiple port options
- Software selectable 12.5 kHz, 25 kHz and 50 kHz channel sizes
- Full and half duplex operation
- Single or dual frequency
- Gross data rates greater than 200 kbit/s
- 256, 192 or 128 bit AES encryption
- Adaptive Coding and Modulation: QPSK to 64 QAM
- Advanced forward error correction
- Software selectable dual / single antenna port operation
- Transparent to all common SCADA protocols
- Dedicated alarm port
- Protected master station and remote station options
- Power optimized option
- -40 to +70 °C operational temperature
- 210 mm (W) x 130 mm (D) x 41.5 mm (H)
- FCC and IC standards compliant
- Seamlessly integrates with Aprisa XE point-to-point radio

### Aprisa SR+ applications

- Electricity grid: distribution automation control and protection in MV / HV distribution / transmission
- Smart grid: concentrator communications and GPRS replacement
- Oil & Gas: production metering, lift pump automation
- Renewables: wind farm, tidal, hydro automation
- Water and wastewater: flow, level, pressure modulation automation and pump status

GENERAL						
NETWORK TOPOLOGY	Point-to-multipoint (PMP), Master, Remote, Repeater					
NETWORK INTEGRATION	Serial and Ethernet (router or bridge mode)					
PROTOCOLS						
ETHERNET	IEEE 802.3, 802.1d/q/p					
SERIAL	Legacy RS-232 transport					
WIRELESS	Proprietary					
SCADA	Transparent to all common SCADA protocols such as Modbus, IEC 60870-5-101/104, DNP3 or similar					
RADIO						
FREQUENCY RANGE	FREQ BAND	TUNING RANGE	TUNE STEP			
	135 MHz	135 – 175 MHz	0.625 kHz			
	220 MHz	215 – 240 MHz	3.125 kHz			
	220 MHz	215 – 240 MHz	2.5 kHz			
	400 MHz	400 – 470 MHz	6.25 kHz			
	(Note 5) 450 MHz	450 – 520 MHz	6.25 kHz			
	(Note 6) 896 MHz	896 – 902 MHz	6.25 kHz			
	(Note 6) 928 MHz	928 – 960 MHz	6.25 kHz			
CHANNEL SIZE	12.5 kHz, 25 kHz and 50 kHz software selectable					
DUPLEX	Single frequency half-duplex Dual frequency half-duplex Dual frequency full-duplex					
FREQUENCY STABILITY	± 1.0 ppm					
FREQUENCY AGING	< 1 ppm / annum					
TRANSMITTER						
MAX PEAK ENVELOPE POWER (PEP)	12.5 W (+41 dBm)					
AVERAGE POWER OUTPUT	64 QAM 0.01 – 2.5 W (+10 to +34 dBm, in 1 dB steps) 16 QAM 0.01 – 3.2 W (+10 to +35 dBm, in 1 dB steps) QPSK 0.01 – 5.0 W (+10 to +37 dBm, in 1 dB steps) (Note 2) 4-CPFSK 0.01 – 10.0 W (+10 to +40 dBm, in 1 dB steps)					
ADJACENT CHANNEL POWER	< -60 dBc					
TRANSIENT ADJACENT CHANNEL POWER	< -60 dBc					
SPURIOUS EMISSIONS	< -37 dBm					
ATTACK TIME	< 1.5 ms					
RELEASE TIME	< 0.5 ms					
DATA TURNAROUND TIME	< 2 ms					
EMISSION DESIGNATOR SUFFIX	QPSK G1D, QAM D1D					
RECEIVER	12.5 kHz	25 kHz	50 kHz			
SENSITIVITY (BER < 10 <sup>-6</sup> )	max coded 64 QAM	-103 dBm	-99 dBm	-96 dBm		
	max coded 16 QAM	-110 dBm	-107 dBm	-104 dBm		
	max coded QPSK	-115 dBm	-112 dBm	-109 dBm		
	min coded 4-CPFSK	-113 dBm	-110 dBm	-107 dBm		
ADJACENT CHANNEL SELECTIVITY	> -47 dBm	> -37 dBm	> -37 dBm			
	(Note 1) [> 48 dB]	[> 58 dB]	[> 58 dB]			
CO-CHANNEL REJECTION max coded QPSK	> -10 dB					
CO-CHANNEL REJECTION max coded 64 QAM	> -20 dB					
INTERMODULATION RESPONSE REJECTION	> -35 dBm [> 60 dB Note 1]					
BLOCKING OR DESENSITISATION	> -17 dBm [> 78 dB Note 1]					
SPURIOUS RESPONSE REJECTION	> -32 dBm [> 63 dB Note 1]					
MODEM	135 / 400 / 450 MHz Bands		220 / 896 / 928 MHz Bands			
	12.5 kHz	25 kHz	12.5 kHz <sup>(4)</sup>	25 kHz	50 kHz	
GROSS DATA RATE	64 QAM	54 kbit/s	96 kbit/s	60 kbit/s	96 kbit/s	216 kbit/s
		16 QAM	36 kbit/s	64 kbit/s	40 kbit/s	64 kbit/s
	QPSK	18 kbit/s	32 kbit/s	20 kbit/s	32 kbit/s	72 kbit/s
		4-CPFSK	9.6 kbit/s	19.2 kbit/s	9.6 kbit/s	19.2 kbit/s
OCCUPIED BANDWIDTH	10.7 kHz	19.8 kHz	11.8 kHz	19.8 kHz	43.0 kHz	
FORWARD ERROR CORRECTION	Variable Reed Solomon plus convolutional code					
ADAPTIVE BURST SUPPORT	Adaptive FEC with Adaptive Coding and Modulation					

SECURITY			
DATA ENCRYPTION	256, 192 or 128 bit AES		
DATA AUTHENTICATION	CCM		
INTERFACES			
ETHERNET	2, 3 or 4 port RJ45 10/100Base-T switch (specified at order)		
SERIAL	2, 1 or 0 port RJ45 RS-232 (specified at order) Additional RS-232 / RS-485 port via USB converter (optional)		
MANAGEMENT	1 x USB micro type B (device port) 1 x USB standard type A (host port) 1 x Alarm port RJ45		
ANTENNA	2 x TNC 50 ohm female Software selectable single or dual port operation		
LEDs	Status: OK, MODE, AUX, TX, RX Diagnostics: RSSI, traffic port status		
TEST BUTTON	Toggles LEDs between diagnostics / status		
PRODUCT OPTIONS			
DATA PORT CONFIGURATION	2 x Ethernet ports + 2 serial ports 3 x Ethernet ports + 1 serial port 4 x Ethernet ports		
POWER OPTIMIZED	Providing optimized power and sleep mode		
PROTECTED STATION	Providing hot-swappable / hot-standby redundant hardware switching		
POWER			
INPUT VOLTAGE	10 – 30 VDC (13.8 V nominal)		
RECEIVE	STANDARD < 7 W POWER OPTIMIZED < 3 W in active receive state < 2 W in idle receive state, < 0.5 W in sleep mode		
TRANSMIT	< 35 W		
MECHANICAL			
DIMENSIONS	210 mm (W) x 130 mm (D) x 41.5 mm (H) 8.27" (W) x 5.12" (D) x 1.63" (H)		
WEIGHT	1.25 kg (2.81 lbs)		
MOUNTING	Wall, Rack or DIN rail		
ENVIRONMENTAL			
OPERATING TEMPERATURE	-40 to +70 °C (-40 to +158 °F)		
HUMIDITY	Maximum 95 % non-condensing		
MANAGEMENT & DIAGNOSTICS			
LOCAL ELEMENT	Web server with full control / diagnostics Partial diagnostics via LEDs and test button Software upgrade from PC or USB flash drive		
REMOTE ELEMENT	Over-the-air remote element management with control / diagnostics Network software upgrade over-the-air		
NETWORK	SNMPv2 and SNMPv3 security support for integration with external network management systems		
COMPLIANCE			
RF	FCC CFR47 Part 24 / 90 / 101, IC RSS 119 / RSS 134		
	BAND	FCC ID:	IC:
	135	Pending	Pending
	220	UIPSQ215M141	6772A-SQ215M141
	400	UIPSQ400M1311	6772A-SQ400M1311
	450	UIPSQ450M140	N/A
	896	UIPSQ896M141	6772A-SQ896M141
	928	UIPSQ928M141	6772A-SQ928M141
EMC	FCC CFR47 Part 15, EN 301 489-5, ICES-003 IEEE 1613 <sup>(Note 3)</sup>		
SAFETY	EN 60950 Class 1 division 2 for hazardous locations		
ENVIRONMENTAL	ETS 300 019 Class 3.4, Ingress Protection IP51		

### Notes:

- The receiver figures are shown in typical fixed interference dBm values and dB values [in brackets] relative to the sensitivity. Relative values are given for QPSK modulation and max coded FEC. Refer to the Aprisa SR+ User Manual for a complete list of modulation and coding levels.
- Please consult 4RF for availability.
- The Aprisa SR+ has been successfully evaluated against the requirements of IEEE 1613 for class 1 performance criteria.
- The gross data rate for the 12.5 kHz channel size in the 896 / 928 MHz bands varies with regulatory compliance.
- The 450 MHz band is only available for FCC.
- The receive tuning range is specified. The transmit tuning range is 896 - 960 MHz.

## ABOUT 4RF

Operating in more than 140 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data and PDH applications.

Copyright © 2015 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice. Aprisa and the 4RF logo are trademarks of 4RF Limited.



For more information please contact  
EMAIL [sales@4rf.com](mailto:sales@4rf.com)  
URL [www.4rf.com](http://www.4rf.com)