



PDP67 F 8DI ION HP

PILZ
THE SPIRIT OF SAFETY

- ▶ Decentralised periphery

1 Introduction

1.1 Validity of documentation

This documentation is valid for the products PDP67 F 8DI ION HP, PDP67 F 8DI ION HP VA. It is valid until new documentation is published.

This operating manual explains the function and operation, describes the installation and provides guidelines on how to connect the product.

1.1.1 Retaining the documentation

This documentation is intended for instruction and should be retained for future reference.

1.2 Definition of symbols

Information that is particularly important is identified as follows:



DANGER!

This warning must be heeded! It warns of a hazardous situation that poses an immediate threat of serious injury and death and indicates preventive measures that can be taken.



WARNING!

This warning must be heeded! It warns of a hazardous situation that could lead to serious injury and death and indicates preventive measures that can be taken.



CAUTION!

This refers to a hazard that can lead to a less serious or minor injury plus material damage, and also provides information on preventive measures that can be taken.



NOTICE

This describes a situation in which the product or devices could be damaged and also provides information on preventive measures that can be taken. It also highlights areas within the text that are of particular importance.



INFORMATION

This gives advice on applications and provides information on special features.

2 Overview

2.1 Unit structure

2.1.1 Unit features


Application of the products PDP67 F 8DI ION HP, PDP67 F 8DI ION HP VA:

Decentralised input module for connection to a Pilz control system, for use in a rugged industrial environment up to protection type IP67.

The product has the following features:

- ▶ Protection type IP67
- ▶ 8 inputs for connecting 8 single-channel or 4 dual-channel sensors
- ▶ 8 outputs, which can be configured as
 - Standard outputs
 - test pulse outputs
 - 24 V outputs
- ▶ Separate output supply for applications with higher current consumption
- ▶ Module is galvanically isolated from CAN bus
- ▶ LED for:
 - Operating state
 - Errors
 - Connection status
 - Supply voltage
 - Input status at each input

2.2 Front view

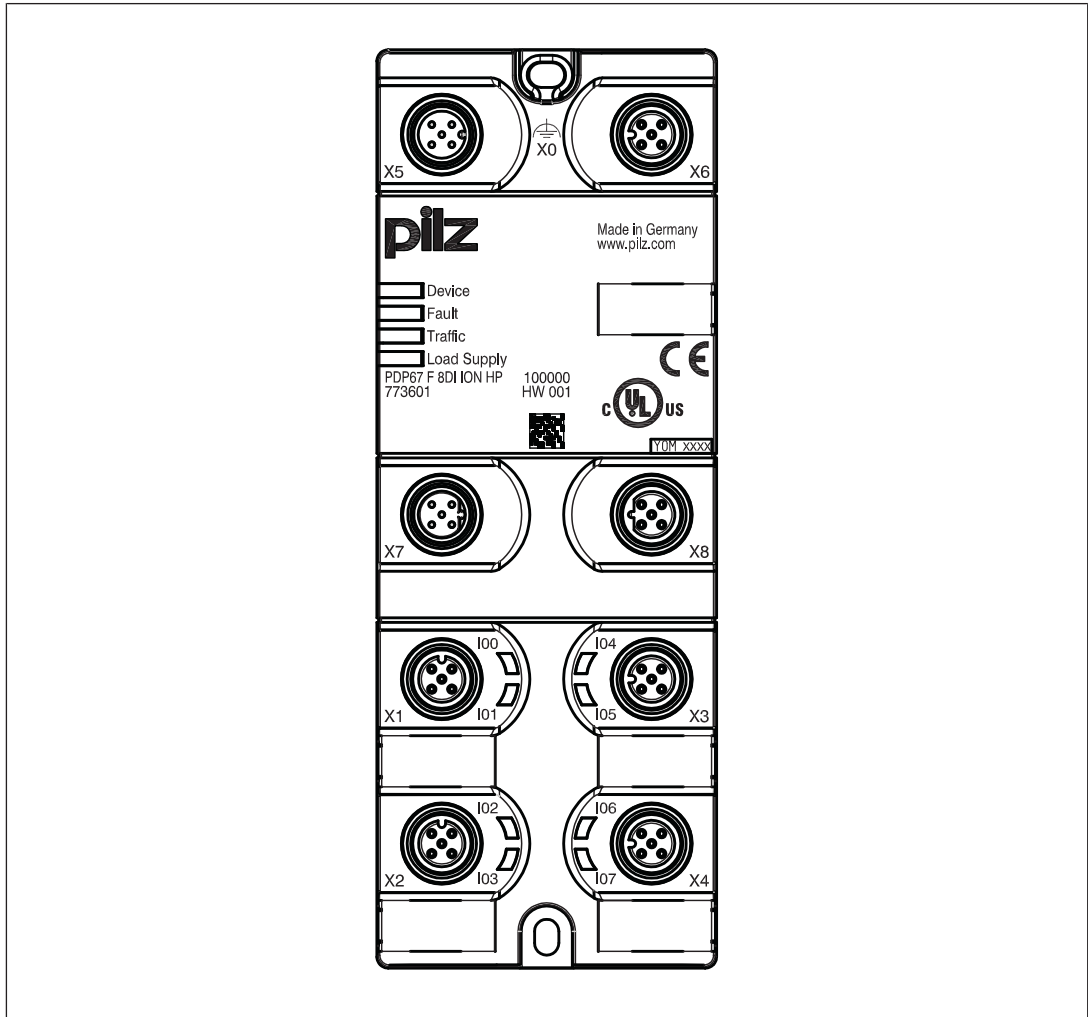

Legend:

- ▶ X1 ... X4:
Inputs
- ▶ X5:
Interface to the control system or to X6 on the upstream module
- ▶ X6:
Interface to X5 on the downstream module
- ▶ X7:
Interface to the 24 V supply or to X8 on the upstream module
- ▶ X8:
Interface to the 24 V supply or to X7 on the downstream module
- ▶ LEDs:
 - Device
 - Fault
 - Traffic
 - Load Supply
 - IO0 ... IO7

2.3 **Scope of supply**

- ▶ Decentralised input module PDP67 F 8DI ION HP/PDP67 F 8DI ION HP VA
- ▶ 4 blind plugs

3 Safety

3.1 Intended use

The products PDP67 F 8DI ION HP, PDP67 F 8DI ION HP VA are decentralised input modules designed for use in a rugged industrial environment up to protection type IP67.

The module can be connected to a link module PNOZ ml2p or PNOZ mm12p from the configurable control system PNOZmulti.

Improper use

The following is deemed improper use in particular

- ▶ Any component, technical or electrical modification to the product,
- ▶ Use of the product outside the areas described in this operating manual,
- ▶ Use of the product outside the technical details (see Technical details).



NOTICE

EMC-compliant electrical installation

The product is designed for use in an industrial environment. The product may cause interference if installed in other environments. If installed in other environments, measures should be taken to comply with the applicable standards and directives for the respective installation site with regard to interference.

3.2 Safety regulations

3.2.1 Use of qualified personnel

The products may only be assembled, installed, programmed, commissioned, operated, maintained and decommissioned by persons who are competent to do so.

A competent person is a qualified and knowledgeable person who, because of their training, experience and current professional activity, has the specialist knowledge required. To be able to inspect, assess and operate devices, systems and machines, the person has to be informed of the state of the art and the applicable national, European and international laws, directives and standards.

It is the company's responsibility only to employ personnel who

- ▶ Are familiar with the basic regulations concerning health and safety / accident prevention,
- ▶ Have read and understood the information provided in the section entitled Safety
- ▶ Have a good knowledge of the generic and specialist standards applicable to the specific application.

3.2.2 **Warranty and liability**

All claims to warranty and liability will be rendered invalid if:

- ▶ The product was used contrary to the purpose for which it is intended
- ▶ Damage can be attributed to not having followed the guidelines in the manual or
- ▶ Operating personnel are not suitably trained.

3.2.3 **Disposal**

- ▶ In safety-related applications, please comply with the mission time T_M in the safety-related characteristic data.
- ▶ When decommissioning, please comply with local regulations regarding the disposal of electronic devices (e.g. Electrical and Electronic Equipment Act).

4 Function description

4.1 Unit properties

4.1.1 Operation

The functions of the inputs and outputs are configured in the system software.

4.1.1.1 Inputs

Single and dual-channel sensors can be connected to the inputs, with or without test pulses.

Input signals must show a “High” (“1” signal) of 15 VDC (+15 ... +30 VDC) and a “Low” (“0” signal) of 0 VDC (-3 ... +5 VDC).

The input status is signalled to the control system via the bus.

Green LEDs indicate the status of the inputs.

Test pulses can be used to check the inputs for shorts across contacts and correct functionality.

4.1.1.2 Outputs

The outputs can be used as standard outputs, as test pulse outputs or as 24 VDC outputs.

The test pulse outputs are suitable for testing the sensor wiring. All safety-related inputs must operate in accordance with the failsafe principle (on switching off).

Two test pulses are available on each plug-in connector; these test pulses are permanently assigned to the inputs. The assignment of the test pulses to the inputs cannot be changed in the system software's configurator.

If the test pulse outputs are not being used, they can be configured as standard outputs or 24 VDC outputs in the system software's configurator.

4.1.2 Data download

Communication with the control system is via a safe data link. Data is exchanged cyclically.

4.1.3 Diagnostics

The status and error messages shown by the LEDs are saved in an error stack. The system software can read this error stack.

5 Installation


5.1 General installation guidelines

The product must be fastened to a flat mounting surface, so that there is no strain on the housing when the module is screwed down. The mounting distances will depend on which plug-in connectors are used and on the bending radius of the cables. Unused connectors should be sealed using blind plugs.

To install the system, proceed as follows:

- ▶ Fit 2 x M4 internal threads on the mounting surface.
- ▶ Use two fixing screws to attach the product to the mounting plate.
- ▶ With shielded cables, connect the functional earth to the upper fixing screw X0.

5.1.1 Dimensions

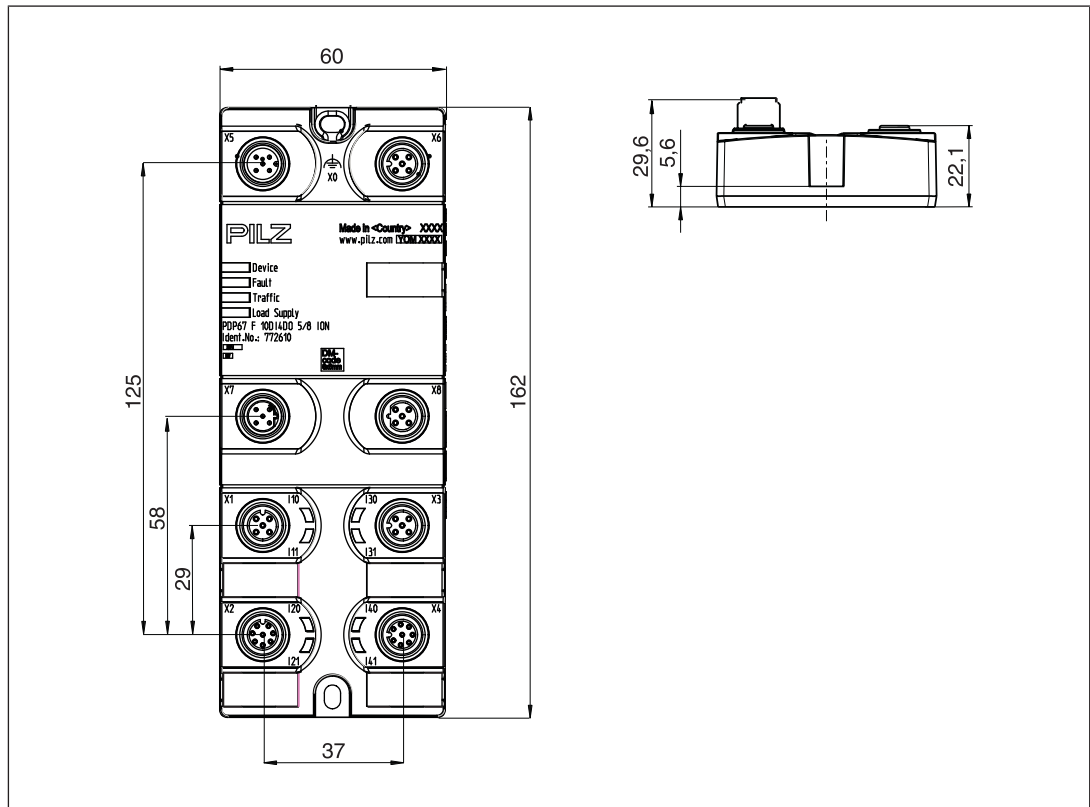

6 Supply Voltage

Please note the following:

- ▶ When selecting the power supply, please refer to the requirements stated under “Technical Details”.
- ▶ Overvoltage or interference voltage can damage or even destroy the electronics on the products PDP67 F 8DI ION HP, PDP67 F 8DI ION HP **VA**. The affected outputs on the control system are shut down. You should therefore take note of the relevant EMC measures.



WARNING!

Safe electrical isolation must be ensured for the 24 V supply. Failure to do so could result in electric shock. Power supplies must conform to EN 60950, section 2.3, EN 60742 or EN 50178.

- To achieve the lowest possible residual ripple, we recommend that you install a three-phase bridge rectifier or regulated supply.
- The “Ground” connection to the earth bar or earth fault monitor must be in accordance with the relevant national regulations (e.g. EN 60204-1, NFPA 79:17-7, NEC: Article 250).



INFORMATION

The module's output circuits have been designed to guarantee maximum safety. To achieve this, extensive tests are carried out internally. Momentary interruptions to the “Supply” voltage during a test procedure can falsify the test result, causing the following malfunction: If the “Supply” voltage is interrupted momentarily, the unbuffered test pulse outputs will transmit a “0” signal. The buffered module electronics reads this signal at the pulsed inputs, thereby triggering the user's configured reaction.

Example: The system reacts as though an E-STOP button has been operated, although this is not the case: there has been a supply interruption.

Remedy: The “Supply” must be buffered.

Use a 5-pin M12 plug-in connector to connect the module to the external supply voltage. The module also has an M12 socket which is physically adjacent to the M12 connector; this is used to distribute the supply voltage to other modules.

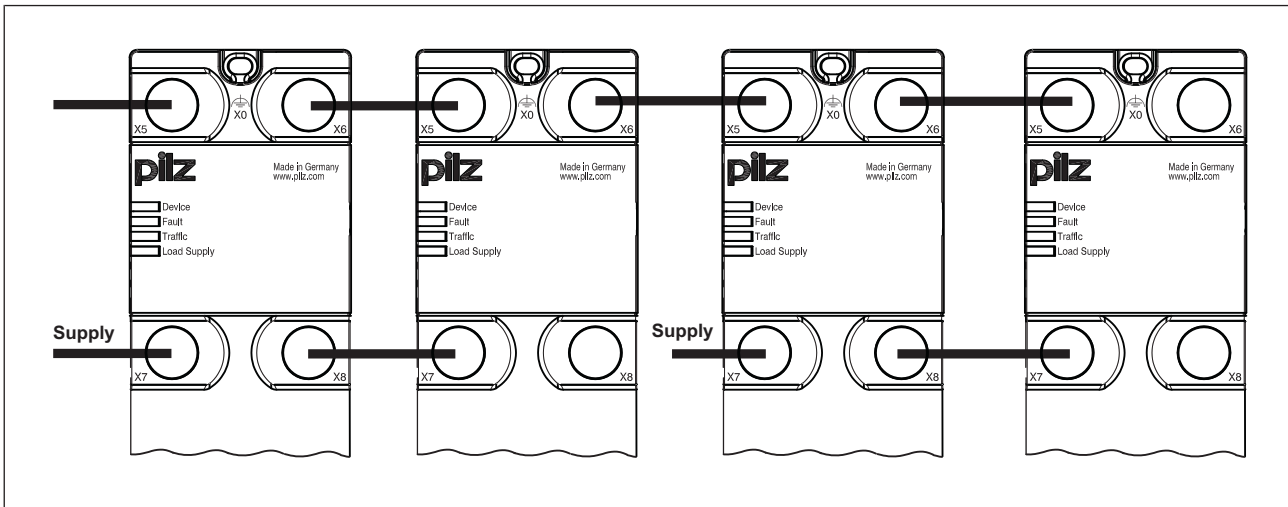


Fig.: Example for connecting and distributing the supply voltage



WARNING!

The current load capacity of the M12 plug-in connector is 4 A per connector. You must ensure that this value is not exceeded. Exceeding the permitted current load capacity can damage the plug-in connector. Please note that the connection of the additional supply voltage is not monitored for overload.



INFORMATION

We recommend that you connect the functional earth to the lower fixing screw (X0).

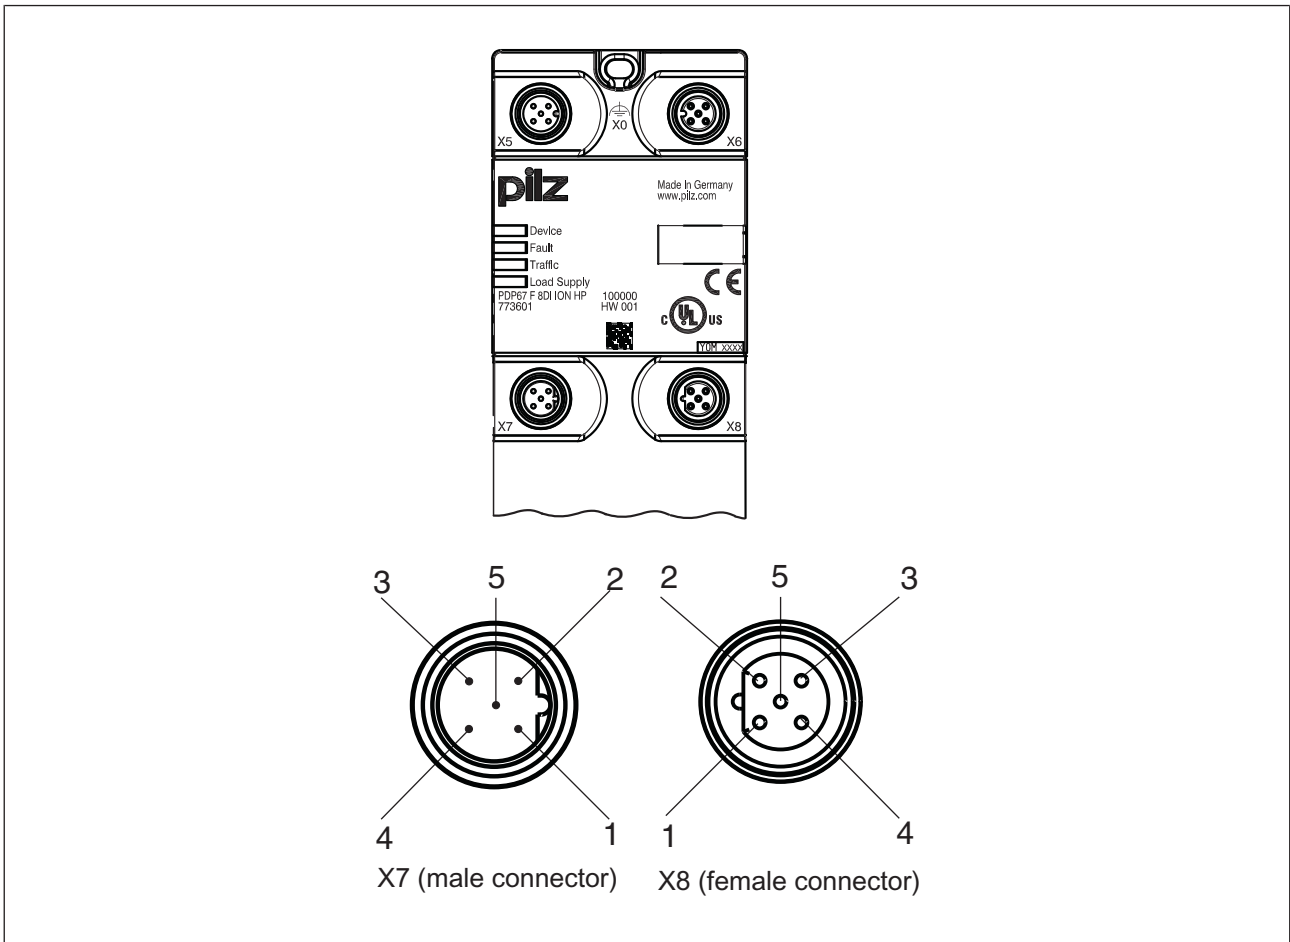


Fig.: Pin assignment for the supply voltage

Key:

- 1: + 24 VDC
- 2: + 24 VDC
- 3: 0 V
- 4: 0 V
- 5: n.a.

7 Wiring

7.1 General wiring guidelines

Note:

- ▶ Information given in the "Technical details" must be followed.
- ▶ Where safety-related applications are concerned, it is essential that short circuits and open circuits are unable to cause a hazardous condition within a plant. The way in which this is done will depend on the degree of hazard from the plant section, the switching frequency of the sensors and the level of safety of the sensors and actuators.
- ▶ Please refer to the link module's operating manual for details of the maximum cable length.
- ▶ Pilz pre-assembled cable can be used to connect the inputs and outputs (see order reference).
- ▶ We recommend you use pre-assembled Pilz connectors to connect the inputs and test pulse outputs (see order reference).



CAUTION!

The power supply must meet the regulations for extra low voltages with protective electrical separation (SELV, PELV).



CAUTION!

In order to guarantee protection type IP67, unused plug-in connectors should be sealed using the blind plugs supplied.




CAUTION!

Make sure that the plug-in connectors are connected to the sensors correctly. Once you have run a function test to check that the plug-in connectors are connected to the sensors correctly, the inputs should be labelled. If the inputs are connected to the sensors incorrectly, life-threatening situations may arise on the plant.

7.2 Connector pin assignment

Inputs/outputs X1 to X4	Assignment	
5-pin M12 female connector A-coded	1: Test pulse x / 24 VDC / ST output 2: Input X 3: 0 V 4: Input X + 1 5: Test pulse X + 1 / 24 VDC / ST output	
Interface to the link module: X5	Assignment	
5 pin M12 male connector A-coded	1: VCC 2: CAN- 3: GND 4: CAN+ 5: Shield	
Interface to the next de-cent- ralised module: X6	Assignment	
5-pin M12 female connector A-coded	1: VCC 2: CAN- 3: GND 4: CAN+ 5: Shield	
Interface to the 24 V power supply or to previous de- centralised module: X7	Assignment	
5 pin M12 male connector B-coded	1: + 24 V DC 2: + 24 V DC 3: 0 V 4: 0 V 5: n.a.	

Interface to the 24 V power supply or to next decentralised module: X8	Assignment	
5-pin M12 female connector B-coded	1: + 24 V DC 2: + 24 V DC 3: 0 V 4: 0 V 5: n.a.	

7.3 Wiring examples

7.3.1 Example: Single-channel, failsafe input device, without test pulse

Features:

- ▶ Depending on the application area and its respective regulations, this connection diagram is suitable for **input devices with frequent and infrequent operation** in accordance with EN ISO 13849-1 **up to PL d** and EN IEC 62061 **up to SIL CL 2**.
- ▶ The input device must be approved for failsafe applications.
- ▶ Please read the instructions provided with the input device.




WARNING!

Short circuits between the cable to the input device and the 24 V line or between cables to various input devices will not be detected. Depending on the application, serious injury or death may result.

Avoid short circuits by

- Appropriate wiring
- Wiring in accordance with the requirements of IEC 61076-2-101 and IEC 60204-1, clause 14.1.1 and 14.1.2

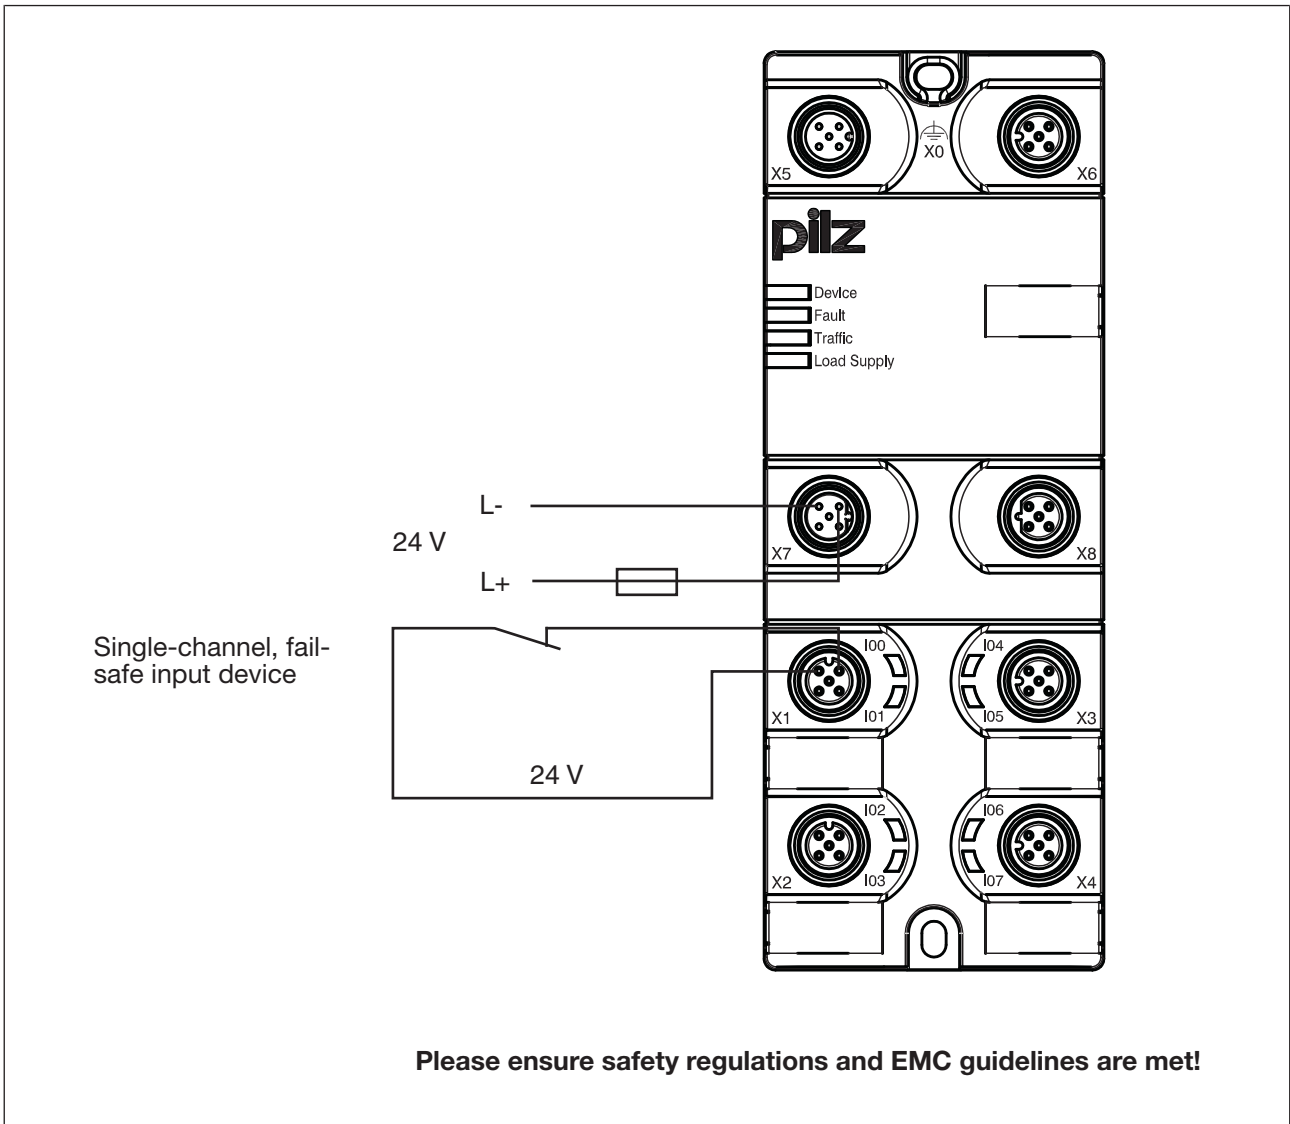

7.3.2 Example: Dual-channel input devices, without test pulses

Features:

- ▶ This type of connection is mainly used for signal inputs with frequent operation.
- ▶ Depending on the application area and its respective regulations, this connection diagram is suitable for **input devices with frequent operation** and diverse channels in accordance with EN ISO 13849-1 **up to PL e** and EN IEC 62061 **up to SIL CL 3**, provided the functionality of both input device channels is monitored in the user program via a **feasibility check**.
- ▶ The input device must be approved for failsafe applications.
- ▶ If you are using input devices with different (diverse) channels, adjacent inputs may be used. The user program will detect short circuits via the feasibility check.




WARNING!

On input devices with identical channels, short circuits between the cable to the input device and the 24 V line or between cables to both input devices will not be detected. Depending on the application, serious injury or death may result.

Avoid short circuits by

- Appropriate wiring
- Wiring in accordance with the requirements of IEC 61076-2-101 and IEC 60204-1, clause 14.1.1 and 14.1.2

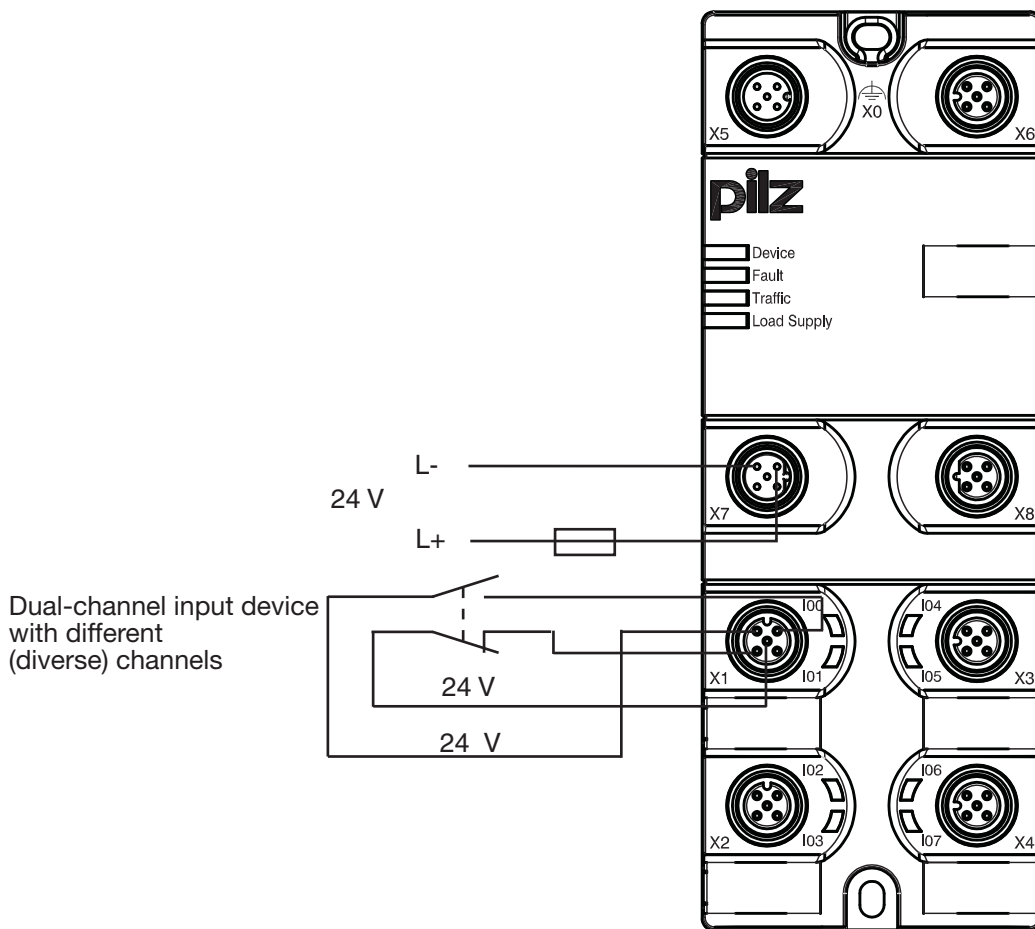

Please ensure safety regulations and EMC guidelines are met!

7.3.3 Example: Single-channel, failsafe input device, with test pulse

Features:

- ▶ Depending on the application area and its respective regulations, this connection diagram is suitable in accordance with EN ISO 13849-1 **up to PL d** and EN IEC 62061 **up to SIL CL 2**.
- ▶ The input device must be approved for failsafe applications.
- ▶ Test pulses can be used to check the inputs for short circuit to 24 V and correct functionality. Short circuits that short out the input device (cable from the test pulse to the input device and cable from the input device to the input) will not be detected.
- ▶ Please read the instructions provided with the input device.
- ▶ Only input devices with N/C contacts can be tested.




CAUTION!

Short circuits between the cable to the input device and the 24 V line or between cables to various input devices will not be detected.

Avoid short circuits by


- Appropriate wiring
- Wiring in accordance with the requirements of IEC 61076-2-101 and IEC 60204-1, clause 14.1.1 and 14.1.2

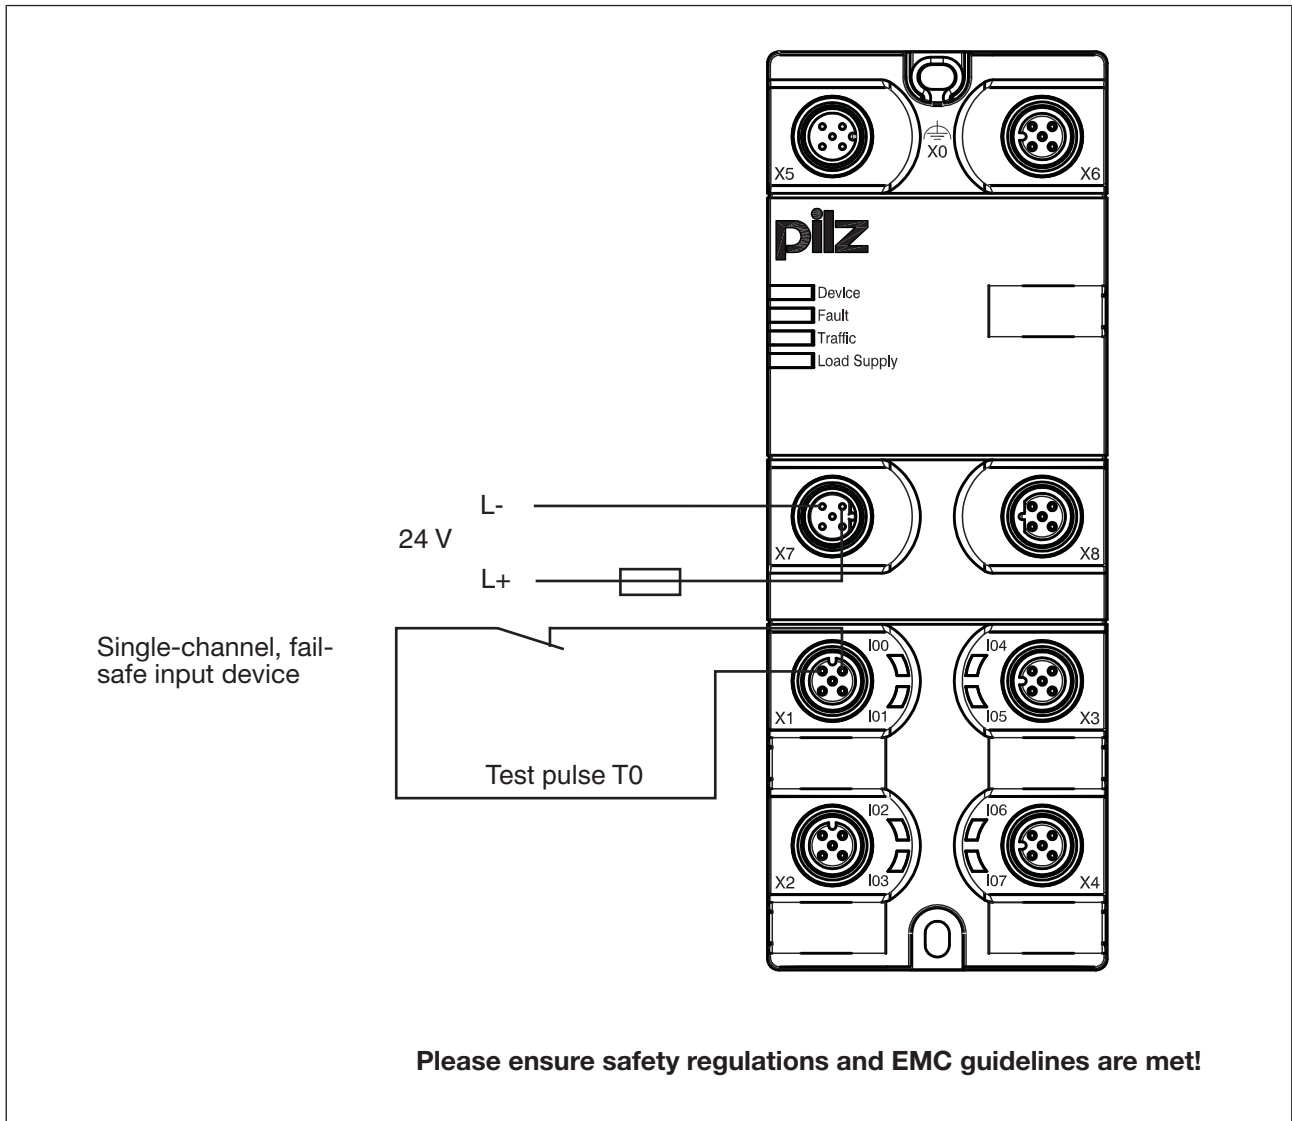

7.3.4 Example: Dual-channel, failsafe input device, with test pulse

Features:

- ▶ Depending on the application area and its respective regulations, this connection diagram is suitable in accordance with EN ISO 13849-1 **up to PL e** and EN IEC 62061 **up to SIL CL 3**.
- ▶ The input device must be approved for failsafe applications.
- ▶ This type of connection is mainly used for signal inputs with infrequent operation.
- ▶ As the test pulses are permanently assigned to the inputs, all short circuits will be detected, with the exception of short circuits that short out the input device (cable from the test pulse to the input device and cable from the input device to the input).

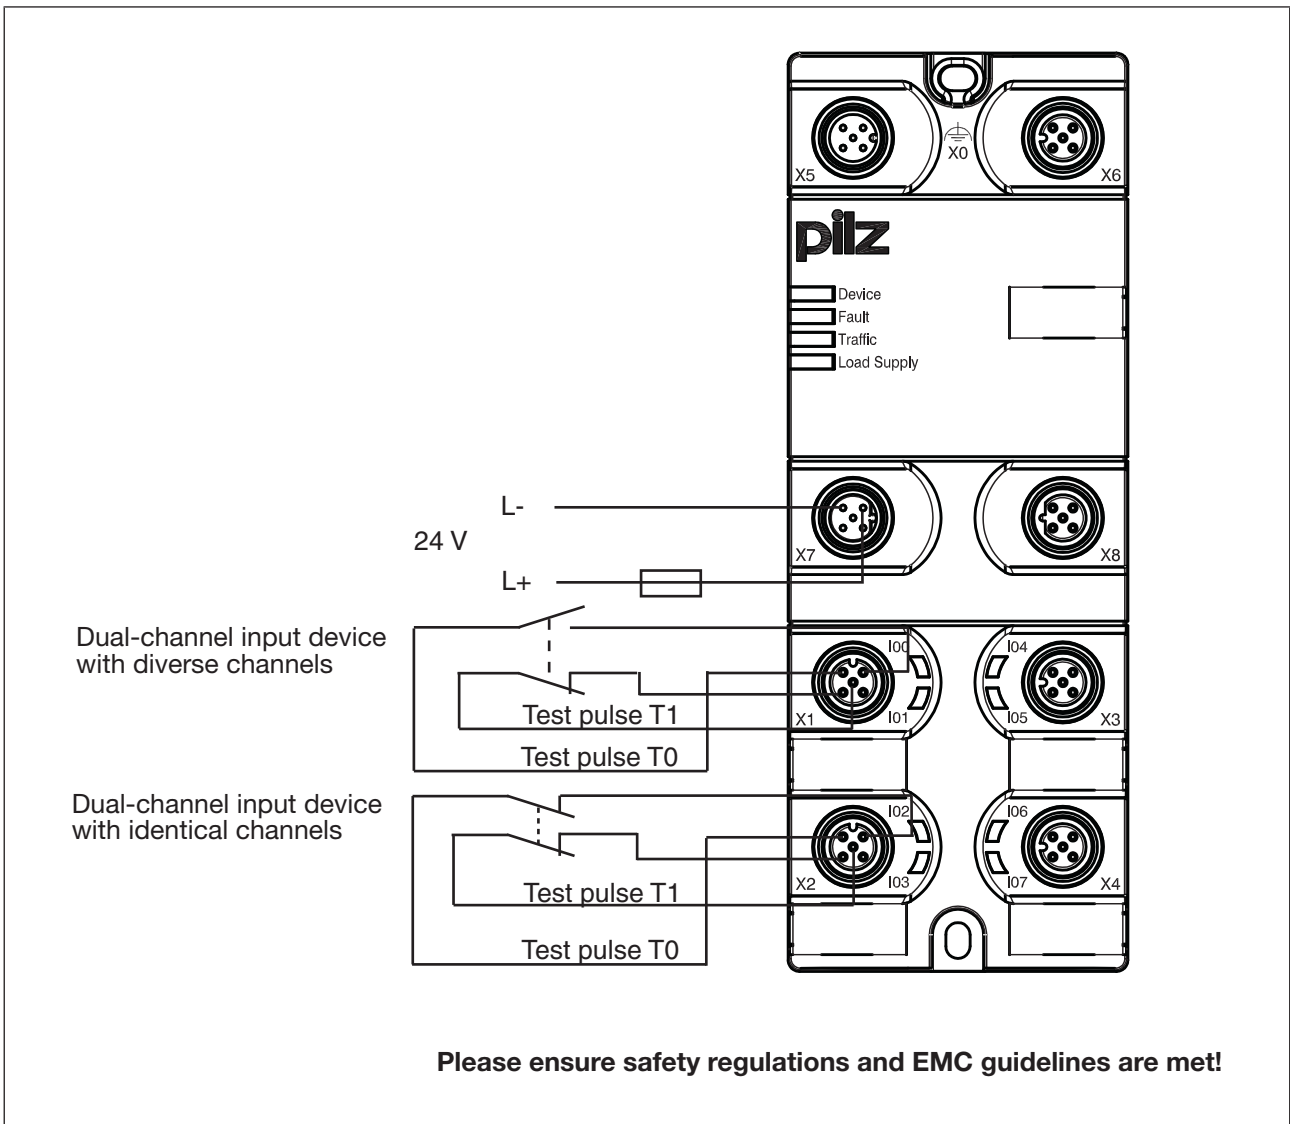




8 Operation














8.1 Messages

The module is ready for operation when the "Ready" LED on the link module is lit continuously.

8.1.1 Display elements for device diagnostics

Legend

-  LED on
-  LED flashes
-  LED off

LED	LED status		Meaning
Device		Green	The unit is ready for operation
			The unit is not ready for operation
FAULT		Red	Internal error
			No error
Traffic		Yellow	Connection to control system established
		Yellow	Error in the connection to the control system. Flashing stops a max. of 1 min. after the fault has been rectified.
			No connection to control system established
Input LEDs		Green	1 signal is present
		Green	Link module has detected a pulse error. Once the fault has been rectified, the decentralised input module will continue to work normally after a waiting period of just a few seconds.
			0 signal is present
Load Supply		Yellow	Voltage is present
		Yellow	The supply voltage is/was too low. Once the fault has been rectified, the LED will not stop flashing until the system has been switched off and then on again.
			Voltage is missing

9 Technical details

General	773601	773615
Certifications	CE, KOSHA, TÜV, UKCA, cULus Listed	CE, KOSHA, TÜV, UKCA, cULus Listed
Application range	Standard/failsafe	Standard/failsafe
Electrical data	773601	773615
Supply voltage		
for	Supply	Supply
Voltage	24 V	24 V
Kind	DC	DC
Voltage tolerance	-30 %/+25 %	-30 %/+25 %
Current load capacity at UB	4 A	4 A
Output of external power supply (DC)	1,2 W	1,2 W
Supply voltage		
for	Load Supply	Load Supply
Voltage	24 V	24 V
Kind	DC	DC
Voltage tolerance	-30 %/+25 %	-30 %/+25 %
Current load capacity at UB	4 A	4 A
External unit fuse protection F1 max.	4 A	4 A
External unit fuse protection F1 max. in accordance with UL508	4 A	4 A
Terminal voltage when switching off inductive loads	-45 V	-45 V
Permitted loads	inductive, capacitive, resistive	inductive, capacitive, resistive
Inputs	773601	773615
Number	8	8
Signal level at "0"	-3 - +5 V DC	-3 - +5 V DC
Signal level at "1"	15 - 30 V DC	15 - 30 V DC
Input voltage in accordance with EN 61131-2 Type 1	24 V DC	24 V DC
Input current at rated voltage	3 mA	3 mA
Input current range	3 mA	3 mA
Min. threshold voltage when signal changes from "1" to "0"	7,5 V	7,5 V
Max. threshold voltage when signal changes from "0" to "1"	11,5 V	11,5 V
Max. processing time of input when signal changes from "1" to "0"	1 ms	1 ms
Max. processing time of input when signal changes from "0" to "1"	1,2 ms	1,2 ms
Min. processing time of input when signal changes from "1" to "0"	0,5 ms	0,5 ms

Inputs	773601	773615
Min. processing time of input when signal changes from "0" to "1"	0,7 ms	0,7 ms
Potential isolation	yes	yes
Semiconductor outputs	773601	773615
Number of positive-switching single-pole semiconductor outputs	8	8
Function	24 VDC output, standard output, test pulse output	24 VDC output, standard output, test pulse output
Rated voltage	24 V DC	24 V DC
Typ. output current at "1" signal and rated voltage of semiconductor output	0,5 A	0,5 A
Permitted current range	0,000 - 0,600 A	0,000 - 0,600 A
Residual current at "0" signal	0,02 mA	0,02 mA
Max. internal voltage drop	200 mV	200 mV
Potential isolation	yes	yes
Short circuit-proof	yes	yes
Test pulse outputs	773601	773615
Max. cable length between test pulse output and input	20 m	20 m
Environmental data	773601	773615
Climatic suitability	EN 60068-2-78	EN 60068-2-78
Ambient temperature		
In accordance with the standard	EN 60068-2-14	EN 60068-2-14
Temperature range	-30 - 60 °C	-30 - 60 °C
Storage temperature		
In accordance with the standard	EN 60068-2-1/-2	EN 60068-2-1/-2
Temperature range	-40 - 70 °C	-40 - 70 °C
Climatic suitability		
In accordance with the standard	EN 60068-2-78	EN 60068-2-78
Humidity	93 % r. h. at 40 °C	93 % r. h. at 40 °C
Condensation during operation	Short-term	Short-term
EMC	EN 55011: class A, EN 61000-4-11, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-9	EN 55011: class A, EN 61000-4-11, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-9
Vibration		
In accordance with the standard	EN 60068-2-6	EN 60068-2-6
Frequency	10 - 55 Hz	10 - 55 Hz
Amplitude	0,35 mm	0,35 mm
Acceleration	1g	1g

Environmental data	773601	773615
Shock stress		
In accordance with the standard	EN 60068-2-27	EN 60068-2-27
Number of shocks	3	3
Acceleration	15g	15g
Duration	11 ms	11 ms
In accordance with the standard	EN 60068-2-27	EN 60068-2-27
Number of shocks	500	500
Acceleration	10g	10g
Duration	16 ms	16 ms
Airgap creepage		
In accordance with the standard	IEC 60664-1	IEC 60664-1
Overvoltage category	III	III
Pollution degree	2	2
Protection type		
In accordance with the standard	EN 60529	EN 60529
Housing	IP67	IP67
Terminals	IP67	IP67
Potential isolation	773601	773615
Potential isolation between	Input and int. bus voltage	Input and int. bus voltage
Type of potential isolation	Basic insulation	Basic insulation
Rated surge voltage	500 V	500 V
Potential isolation between	SC output and int. bus volt.	SC output and int. bus volt.
Type of potential isolation	Basic insulation	Basic insulation
Rated surge voltage	500 V	500 V
Mechanical data	773601	773615
Material		
Top	Valox 855	Valox 855
Labelling bracket (accessories)	PC	PC
Connection type	M12	Stainless steel 1.4305
Mounting type	screw interlocked	screw interlocked
Dimensions		
Height	162 mm	162 mm
Width	60 mm	60 mm
Depth	30 mm	30 mm
Weight	320 g	315 g

Where standards are undated, the 2010-03 latest editions shall apply.

9.1 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN IEC 62061 SIL CL/ maximum SIL	EN IEC 62061 PFH _D [1/h]	EN/IEC 61511 SIL	EN/IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
------	----------------	----------------------------	----------------------------------	---	--	---------------------	---------------------	---

Input								
Inputs	1-channel	PL d	Cat. 2	SIL CL 2	9,06E-09	SIL 2	7,89E-04	20
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,24E-09	SIL 3	1,68E-05	20
Bus interface								
Bus inter- face	–	PL e	Cat. 4	SIL CL 3	1,94E-09	SIL 3	2,87E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ Safety characteristic data in accordance with EN IEC 62061 and EN/IEC 61511 was calculated based on EN/IEC 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN/IEC 61508-6 and EN/IEC 61511 and as the proof test interval and mission time in accordance with EN IEC 62061.

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

10 Order reference

10.1 Order reference for module

Product type	Features	Order no.
PDP67 F 8DI ION HP	Decentralised input module	773601
PDP67 F 8DI ION HP VA	Decentralised input module, V2A ring nut	773615

10.2 Order reference for accessories

10.2.1 Plug

Product type	Features	Order no.
Caps for IP67 modules	Blind plug	380324

10.2.2 Cable (by the metre)

Product type	Features	Order no.
PSS SB BUS-CABLE LC	By the metre	311074
PSS67 I/O Cable	By the metre	380320

10.2.3 Cable, M12 to M8

Product type	Features	Connector X1	Connector X2	Connector X3	Order no.
PSS67 Cable M8sf M12sm, 3m	3 m	M 4, 8-pin female connector, straight	M12, 4-pin male connector, straight		380200
PSS67 Cable M8sf M12sm, 5m	5 m	M 4, 8-pin female connector, straight	M12, 4-pin male connector, straight		380201
PSS67 Cable M8sf M12sm, 10m	10 m	M 4, 8-pin female connector, straight	M12, 4-pin male connector, straight		380202
PSS67 Cable M8sf M12sm, 30m	30 m	M 4, 8-pin female connector, straight	M12, 4-pin male connector, straight		380203
PSS67 Cable M8af M12sm, 3m	3 m	M 4, 8-pin female connector, angled	M12, 4-pin male connector, straight		380204
PSS67 Cable M8af M12sm, 5m	5 m	M 4, 8-pin female connector, angled	M12, 4-pin male connector, straight		380205

Product type	Features	Connector X1	Connector X2	Connector X3	Order no.
PSS67 Cable M8af M12sm, 10m	10 m	M 4, 8-pin female connector, angled	M12, 4-pin male connector, straight		380206
PSS67 Cable M8af M12sm, 30m	30 m	M 4, 8-pin female connector, angled	M12, 4-pin male connector, straight		380207

10.2.4 Cable, M12 to M12

Product type	Features	Connector X1	Connector X2	Connector X3	Order no.
PDP67 Cable M12-5sf M12-5sm, 0.5m	0.5 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380710
PDP67 Cable M12-5sf M12-5sm, 1m	1 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380711
PDP67 Cable M12-5sf M12-5sm, 1.5m	1.5 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380712
PDP67 Cable M12-5sf M12-5sm, 2m	2 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380713
PSS67 Cable M12sf M12sm, 3m	3 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380208
PSS67 Cable M12sf M12sm, 5m	5 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380209
PSS67 Cable M12sf M12sm, 10m	10 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380210
PSS67 Cable M12sf M12sm, 30m	30 m	M12, 5-pin female connector, straight	M12, 5-pin male connector, straight		380211
PSS67 Cable M12af M12am, 3m	3 m	M12, 5-pin female connector, angled	M12, 5-pin male connector, angled		380212
PSS67 Cable M12af M12am, 5m	5 m	M12, 5-pin female connector, angled	M12, 5-pin male connector, angled		380213
PSS67 Cable M12af M12am, 10m	10 m	M12, 5-pin female connector, angled	M12, 5-pin male connector, angled		380214
PSS67 Cable M12af M12am, 30m	30 m	M12, 5-pin female connector, angled	M12, 5-pin male connector, angled		380215

10.2.5 Adapter

Product type	Features	Connector X1	Connector X2	Connector X3	Order no.
PSEN ma adapter	Adapter for PSEnmag/PIT en1.0	4-pin M12 female connector	5-pin M12 male connector		380300
PSEN cs adapter	Adapter for PSENcode	8-pin M12 female connector	5-pin M12 male connector		380301
PSEN sl adapter	Adapter for PSENSlock	8-pin M12 female connector	5-pin M12 male connector		380325
PSEN op SL adapter	Set of 2 adapter cables for transmitter and receiver	M12, 5-pin male connector	M12, 5-pin female connector		631187

11 **EC declaration of conformity**

This product/these products meet the requirements of the directive 2006/42/EC for machinery of the European Parliament and of the Council. The complete EC Declaration of Conformity is available on the Internet at www.pilz.com/downloads.

Authorised representative: Norbert Fröhlich, Pilz GmbH & Co. KG, Felix-Wankel-Str. 2, 73760 Ostfildern, Germany

12 UKCA-Declaration of Conformity

This product(s) complies with following UK legislation: Supply of Machinery (Safety) Regulation 2008.

The complete UKCA Declaration of Conformity is available on the Internet at www.pilz.com/downloads.

Representative: Pilz Automation Technology, Pilz House, Little Colliers Field, Corby, Northamptonshire, NN18 8TJ United Kingdom, eMail: mail@pilz.co.uk

► Support

Technical support is available from Pilz round the clock.

Americas

Brazil

+55 11 97569-2804

Canada

+1 888 315 7459

Mexico

+52 55 5572 1300

USA (toll-free)

+1 877-PILZUSA (745-9872)

Asia

China

+86 21 60880878-216

Japan

+81 45 471-2281

South Korea

+82 31 778 3300

Australia and Oceania

Australia

+61 3 95600621

New Zealand

+64 9 6345350

Europe

Austria

+43 1 7986263-0

Belgium, Luxembourg

+32 9 3217570

France

+33 3 88104003

Germany

+49 711 3409-444

Ireland

+353 21 4804983

Italy, Malta

+39 0362 1826711

Scandinavia

+45 74436332

Spain

+34 938497433

Switzerland

+41 62 88979-32

The Netherlands

+31 347 320477

Turkey

+90 216 5775552

United Kingdom

+44 1536 462203

You can reach our international hotline on:

+49 711 3409-222

support@pilz.com

Pilz develops environmentally-friendly products using ecological materials and energy-saving technologies. Offices and production facilities are ecologically designed, environmentally-aware and energy-saving. So Pilz offers sustainability, plus the security of using energy-efficient products and environmentally-friendly solutions.



We are represented internationally. Please refer to our homepage www.pilz.com for further details or contact our headquarters.

Headquarters: Pilz GmbH & Co. KG, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: info@pilz.com, Internet: www.pilz.com

PILZ
THE SPIRIT OF SAFETY

1002225-EN-06, 2022-11 Printed in Germany
© Pilz GmbH & Co. KG, 2019

CECE®, CHRE®, CMSE®, InduraNET p®, Leansafe®, Master of Safety®, Master of Security®, PAS4000®, PAScall®, PASconfig®, Pilz®, PTT®, PLID®, PMCPirimo®, PMCPiritego®, PMCTendo®, PMD®, PMJ®, PNOZ®, PRCM®, PRM®, PRMNET p®, PSEN®, PSENi®, PSS®, PVS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, THE SPIRIT OF SAFETY® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries. We would point out that product features may vary from the details stated in this document, depending on the status at the time of publication and the scope of the equipment. We accept no responsibility for the validity, accuracy and entirety of the text and graphics presented in this information. Please contact our Technical Support if you have any questions.