



---

# Customer information packet

## IDVSWDM3615T

5HP, 1750RPM, 3PH, 60HZ, 184TC, 3646M, TEFC, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	184TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.000 A @ 230.0 V 6.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a

## Part detail

Revision	P
Type	AC
Mech. spec.	36K606
Base	
Status	PRD/A
Elec. spec.	36WGS719
Layout	36LYK606
Eff. date	08-23-2023
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	06-04-2012

<b>Insulation Class</b>	H
<b>Inverter Code</b>	Inverter Duty
<b>KVA Code</b>	J
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Max Speed</b>	6000 rpm
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	9 @ 16 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3646M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	18.06 IN
<b>Power Factor</b>	81
<b>Product Family</b>	Wash Down Paint Free
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	C-Face
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.125 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	Shaft Slinger
<b>Speed</b>	1750 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Normally Closed Thermostat
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP3956L</b>			
<b>CAT.NO.</b>	IDVSWDM3615T		
<b>SPEC.</b>	36K606S719G1		
<b>FRAME</b>	184TC	<b>H.P.</b>	5 TE
<b>VOLTS</b>	230/460		
<b>MAG. CUR.</b>	5.8/2.9	<b>F.L. AMPS</b>	13/6.5
<b>R.P.M.</b>	1750	<b>R.P.M. MAX</b>	6000
<b>HZ.</b>	60	<b>PH.</b>	3 <b>CLASS</b> H
<b>SER.F.</b>	1.00	<b>DES.</b>	B <b>SL HZ</b> 1.7
<b>NEMA NOM. EFF.</b>	89.5	<b>WK2</b>	0.428
<b>BLWR V</b>	<b>PH</b>	<b>HZ</b>	<b>AMPS</b>
<b>RATING</b>	40C AMB-CONT		
<b>DE BRG</b>	6206	<b>ODE BRG</b>	6205
<b>CC</b>	010A <b>SN</b>		

**AC Induction Motor Performance Data**

Record # 38663

Typical performance - not guaranteed values

<b>Winding: 36WGS719-R002</b>		<b>Type: 3646M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	5	<b>Full Load Torque</b>	15.2 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	13/6.5	<b>Breakdown Torque</b>	49.7 LB-FT		
<b>R.P.M.</b>	1750	<b>Pull-up Torque</b>	27.7 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	32.3 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	J	<b>Starting Current</b>	48.3 A	
<b>Service Factor (S.F.)</b>		1	<b>No-load Current</b>	2.91 A	
<b>NEMA Nom. Eff.</b>	89.5 <b>Power Factor</b>	81	<b>Line-line Res. @ 25°C</b>	2.32 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	87°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	107°C	
			<b>Locked-rotor Power Factor</b>	39	
			<b>Rotor inertia</b>	0.428 LB-FT <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 5 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	42	64	75	81	83	84
<b>Efficiency</b>	86.7	90.5	90.8	90.1	88.4	86.6
<b>Speed</b>	1788	1776	1763	1748	1732	1714
<b>Line amperes</b>	3.27	4.1	5.2	6.49	8.02	9.69


ABB Motors and Mechanical Inc.

WINDING # 36WGS719


5 HP 3 PH 60 HZ 1750 RPM 460 V 3646M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=49.7 PU=27.7 LR=32.3 LRA=48.3

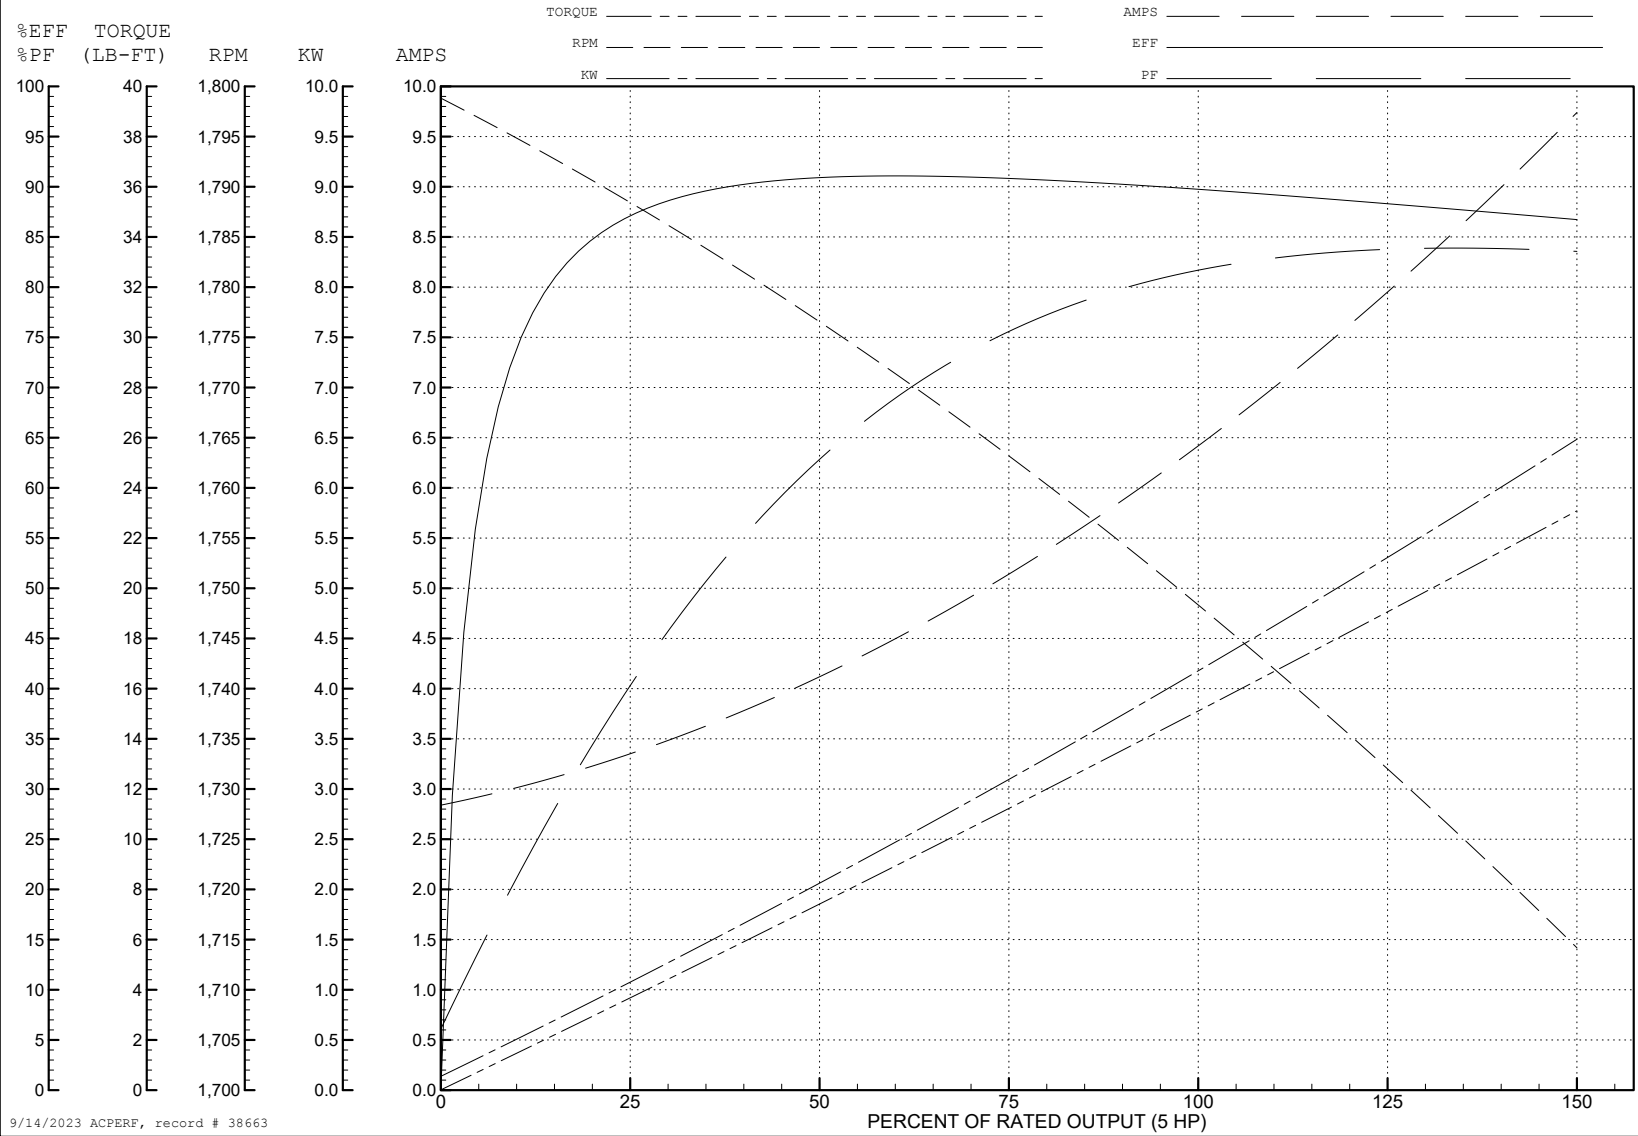


9/14/2023 ACPERF, record # 38663

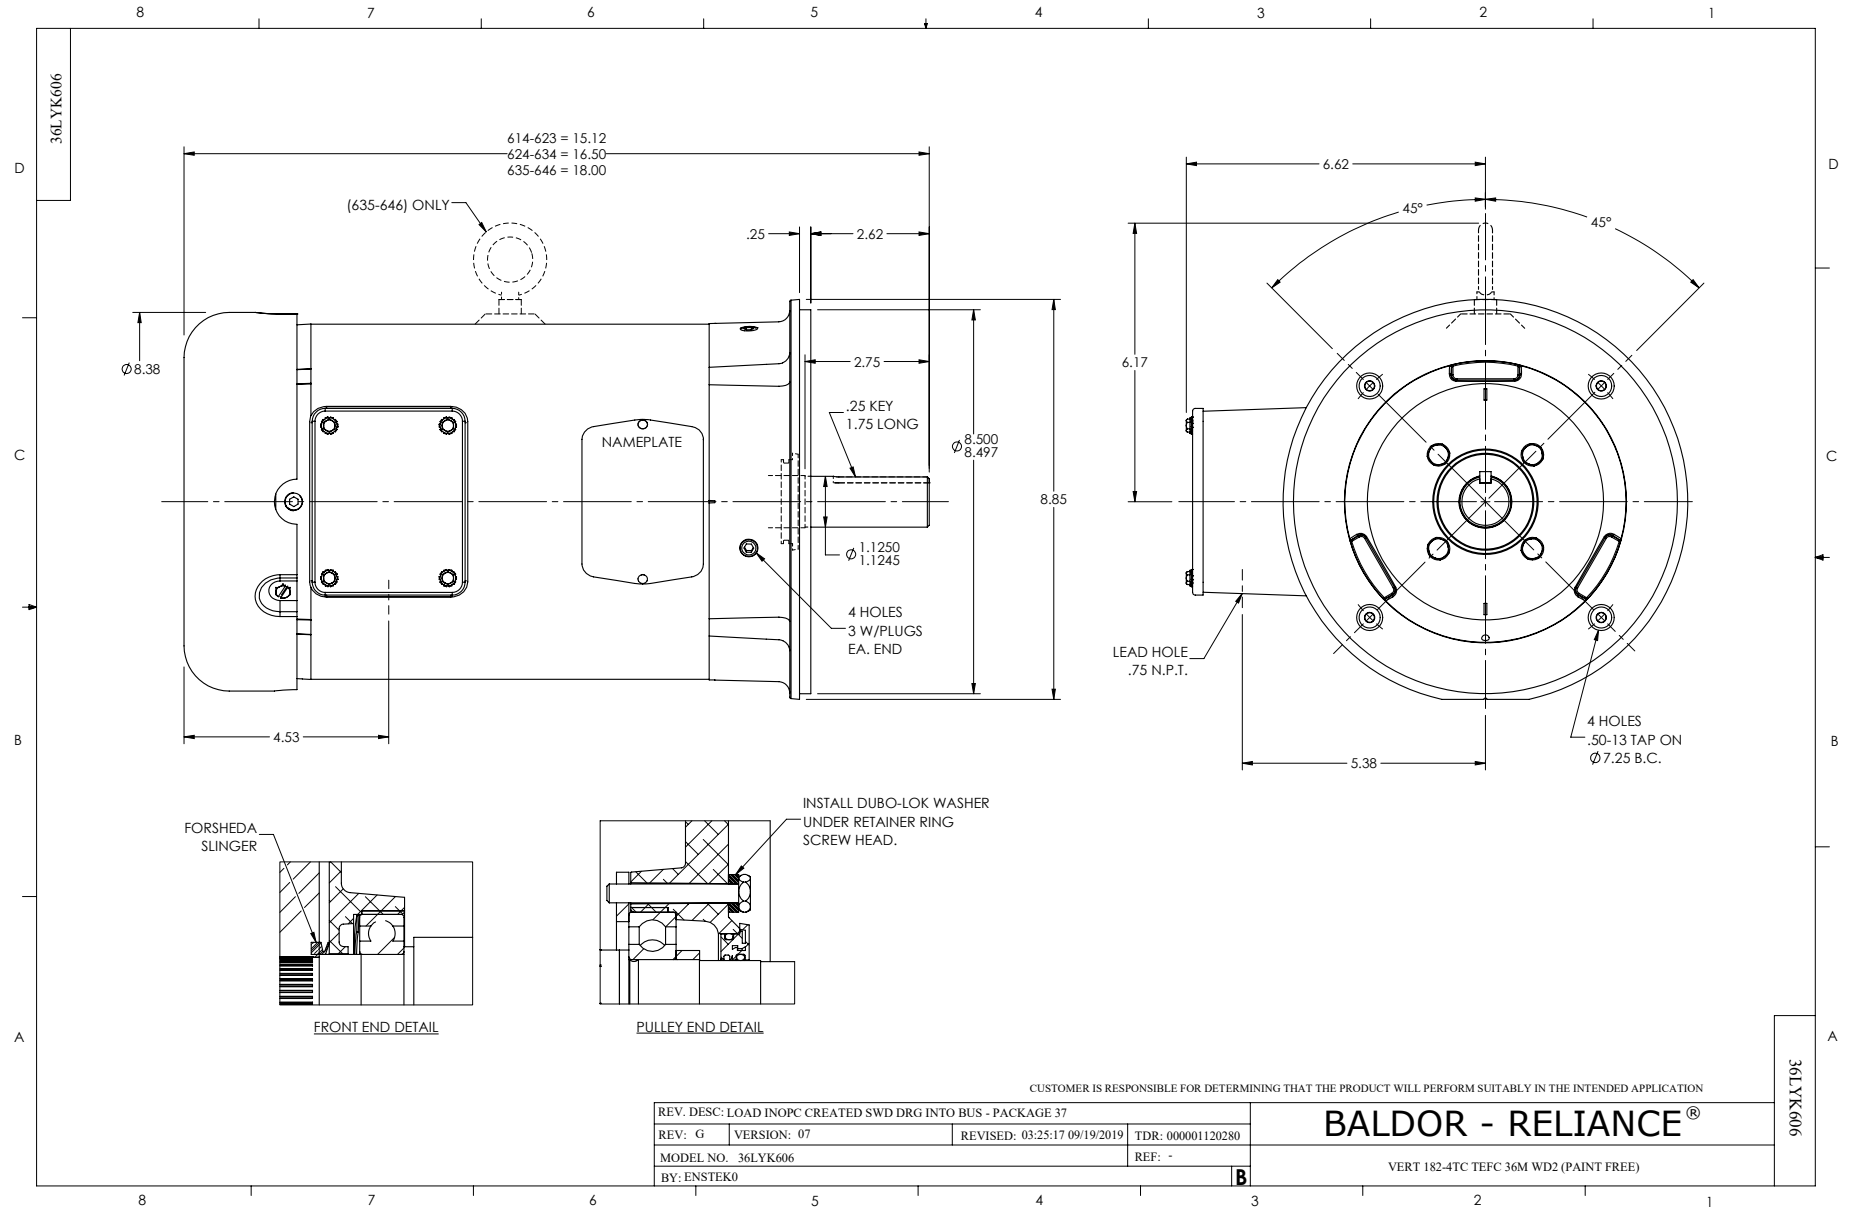

CD0005




LOW VOLTAGE  
(2Y)



LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS