



TM400

The TM400 series of panel PCs combine an energy-efficient, yet powerful, Intel Bay Trail processor with a sleek, responsive, multitouch panel.

Bright, Clear Touch Display

Integrated LCD features optimal brightness and resolution with accurate touch controls.

IP-65 Front Bezel

Front bezel resistant to spills, splashes and debris.



Flexible Mounting

Support for panel and VESA mounting allows for flexible installation anywhere.



15" TM400



17" TM400



19" TM400

Specifications


Rear I/O	1 VGA 1 DisplayPort 1 USB 3.0 3 USB 2.0 2 RS232/422/485 COM ports 2 Audio jacks; Line-out, Mic-in 2 Antenna jacks 1 Isolated 8-bit DIO 1 SIM Card Slot 1 CFast slot	1 VGA 1 DisplayPort 1 USB 3.0 3 USB 2.0 2 RS232/422/485 COM ports 2 Audio jacks; Line-out, Mic-in 2 Antenna jacks 1 Isolated 8-bit DIO 1 SIM Card Slot 1 CFast slot	1 VGA 1 DisplayPort 1 USB 3.0 3 USB 2.0 2 RS232/422/485 COM ports 2 Audio jacks; Line-out, Mic-in 2 Antenna jacks 1 Isolated 8-bit DIO 1 SIM Card Slot 1 CFast slot
Touchscreen Type	5-Wire Resistive	5-Wire Resistive	5-Wire Resistive
Viewing Angle (L/R:T/B)	160/160	170/160	170/160
Display Size	15"	17"	19"
Display Resolution	1024 x 768	1280 x 1024	1280 x 1024
Display Brightness	350	350	350
Aspect Ratio	4:3	4:3	4:3
Processor Speed	1.91 GHz	1.91 GHz	1.91 GHz
Processor Socket	Onboard (BGA)	Onboard (BGA)	Onboard (BGA)
Processor Generation	Bay Trail	Bay Trail	Bay Trail
Graphics/GPU	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics
Memory Type	DDR3L DIMM (non-ECC)	DDR3L DIMM (non-ECC)	DDR3L DIMM (non-ECC)
Memory Speed	1066, 1333 MHz	1066, 1333 MHz	1066, 1333 MHz
Expansion Type	PCIe Mini Card (full height)	PCIe Mini Card (full height)	PCIe Mini Card (full height)
Storage Options	2.5" HDD/SDD, CFast	2.5" HDD/SDD, CFast	2.5" HDD/SDD, CFast
SATA Interface	6.0 Gb/sec	6.0 Gb/sec	6.0 Gb/sec
LAN Controller	Intel I210-AT Gb	Intel I210-AT Gb	Intel I210-AT Gb
Audio Controller	HD Audio Codec	HD Audio Codec	HD Audio Codec
Input Voltage	9 ~ 48 V	9 ~ 48 V	9 ~ 48 V
Power Input	3-pin Terminal Block connector	3-pin Terminal Block connector	3-pin Terminal Block connector
Operating Temperature	-10°C ~ 60°C	-10°C ~ 60°C	-5°C ~ 50°C
Operating Humidity	10% ~ 95%	10% ~ 95%	10% ~ 95%
Mounting	VESA MIS-D 75 and 100, Panel-mount, Wall-mount	VESA MIS-D 75 and 100, Panel-mount, Wall-mount	VESA MIS-D 75 and 100, Panel-mount, Wall-mount
Dimensions (mm)	408 x 312.4 x 68 mm	450 x 350 x 72 mm	510 x 389.3 x 72 mm
Warranty	1 year limited warranty	1 year limited warranty	1 year limited warranty



15" TM400 Panel Dimensions

*Cutout Template Available at logicsupply.com/tm400


All dimensions in mm

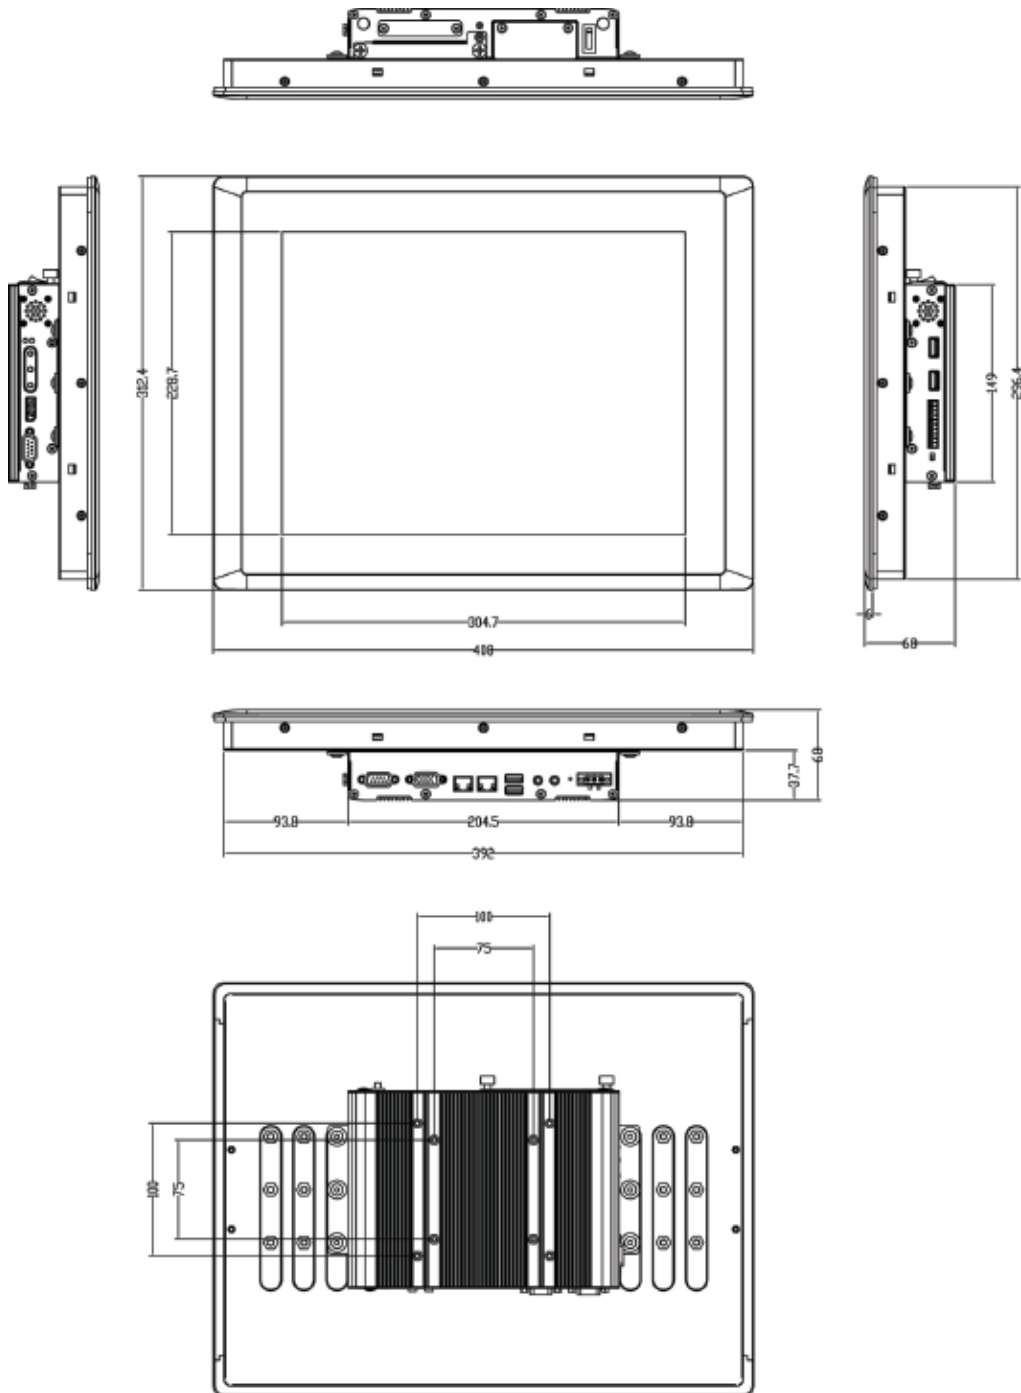

17" TM400 Panel Dimensions

*Cutout Template Available at logicsupply.com/tm400

All dimensions in mm

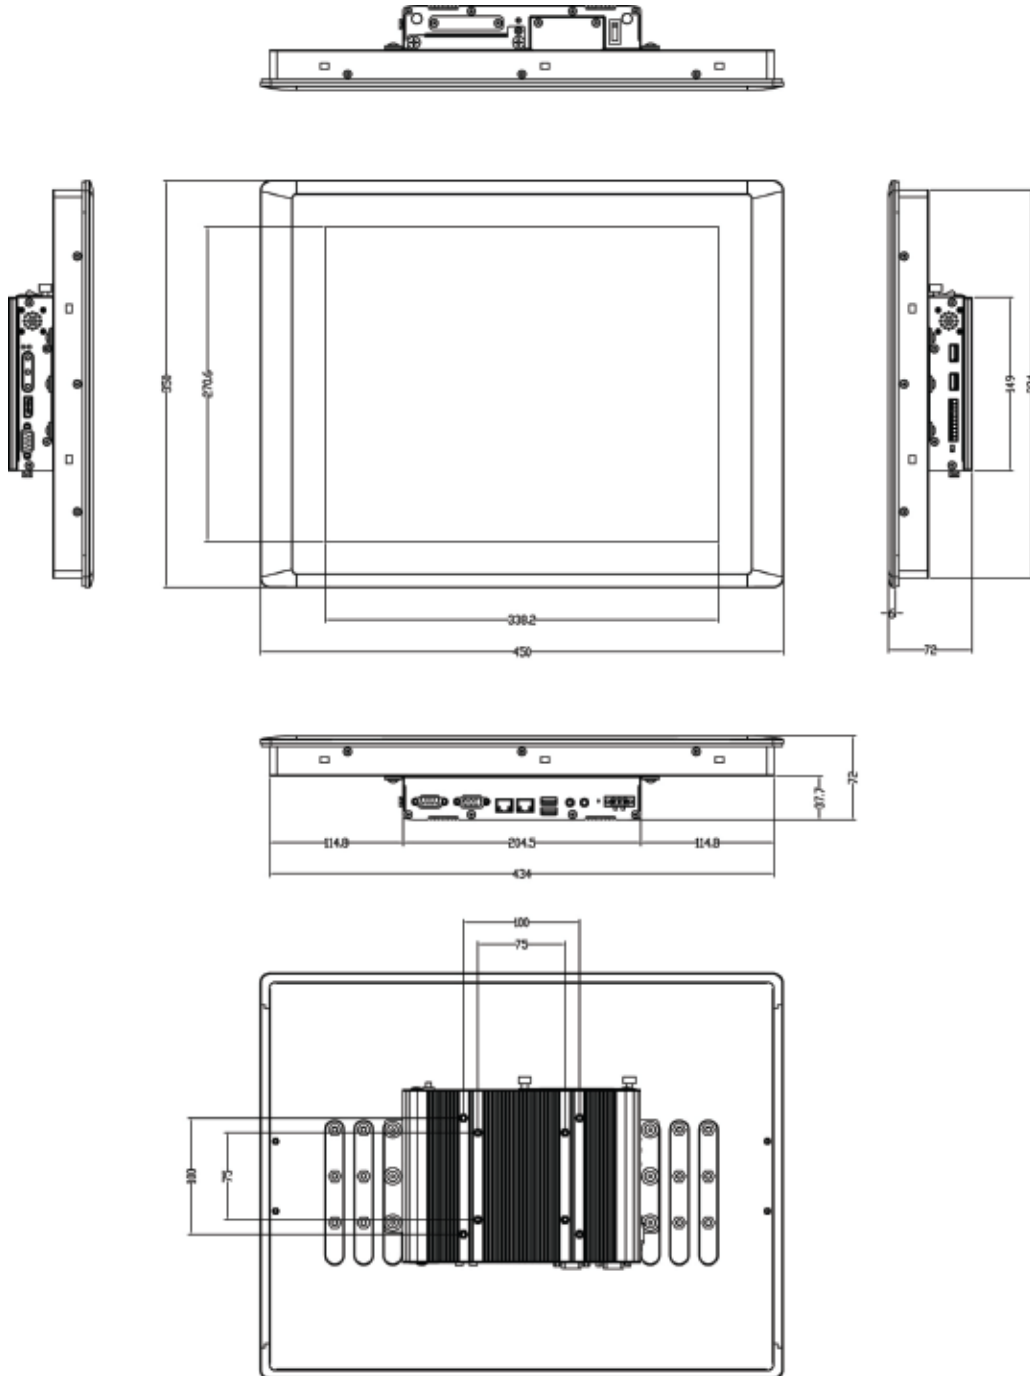

19" TM400 Panel Dimensions

*Cutout Template Available at logicsupply.com/tm400

All dimensions in mm

