

REPORT

Products for Hazardous Location Applications





finder[®]

SWITCH TO THE FUTURE

Products Designed for HazLoc Environments

Finder offers a range of products that conform to Class 1, Division 2 and ATEX standards:

- 39 Series and 58 Series Interface Modules.
- 66 Series Power Relay.

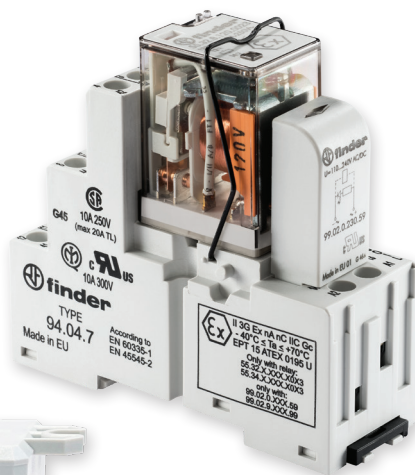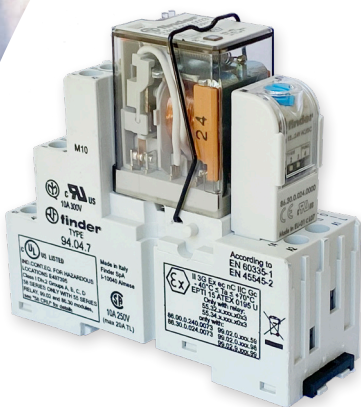

Applications


- Chemical, petrochemical, and pharmaceutical
- Gas stations and garages
- Commercial refrigeration and HVAC
- Medical storage chambers
- Water and wastewater

39 Series




- 6 A - SPDT
- Supply voltages from (6 ... 125)V AC/DC
230 V AC
- Integral coil indication
- Multi-voltage version: (24 - 240) V AC/DC
- Screw or push in termination

58 Series



- 9 A - 2 pole and 5 A - 4 pole configurations
- Supply voltages from: (12 ... 230)V AC
(12 ... 125)V DC
- Supply status indication as standard
- Screw termination

58 Series Timer



- 9 A - 2 pole and 5 A - 4 pole configurations
- Supply voltages from (12 ... 24)V AC/DC
- Ease of time settings
- On-delay and interval functions

66 Series



- 30 A - DPST-NO and 25 A - DPDT
- Supply voltages from: (12 ... 230)V AC
(12 ... 125)V DC
- PCB mount or Flange mount (Faston 250)



FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property.

UL Listed E497395 C1D2 - A, B, C, D



ATEX Ex ec NC (39 / 58) / Ex nC (66)

