


LED REMOTE PHOSPHOR LINEAR HIGH BAY LIGHTING - 4' and 8'



ETG-LRP

*3 Tube LRP shown above
with and without reflector option

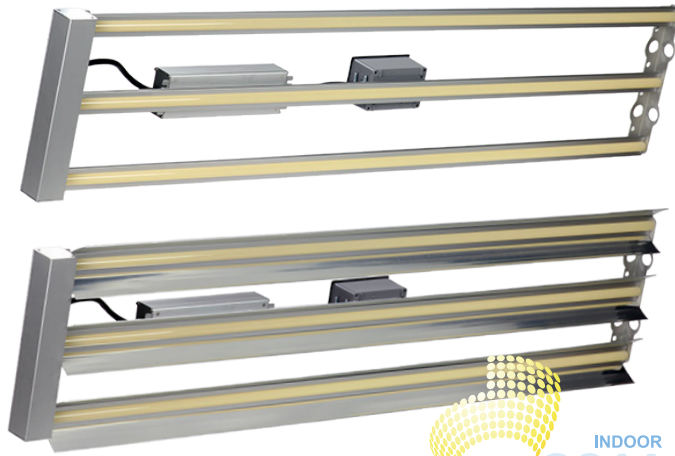

FEATURES:

- Instant strike
- Glare free and uniform light distribution
- High CRI options, optional red LED enrichment technology*
- Dimmable option, enabling the use of occupancy sensors for power savings
- Universal AC input/full range, 90-305 VAC
- Made in USA with global components

BENEFITS:

- Up to 30% higher system efficacy compared to conventional LEDs
- Smooth light output, even when dimmed
- No horizontal dust collecting surface bulbs
- No glass, no mercury
- ETL, RoHS
- Longer lifetime
- 5 year warranty

4' LINEAR - OPERATING CHARACTERISTICS / ORDERING INFORMATION

| MODEL | CRI | CCT° | LUMENS *Estimated | TOTAL WATTS | LUMENS/WATTS | TEMPERATURE | L90 HOURS |
|--------------------|-----|-------|----------------------|-------------|--------------|-------------|-----------|
| 1 Tube | | | | | | | |
| ETG-LRP-1060 | 80 | 5000K | *5,700 | 60 | 95 | -30 to 40°C | >96,000 |
| ETG-LRP-1080 | 80 | 5000K | *8,000 | 80 | 95 | -40 to 50°C | >96,000 |
| ETG-LRP-1080-P1-C3 | 90* | 5000K | *5,700 | 60 | 90 | -40 to 50°C | >96,000 |
| ETG-LRP-1080H | 80 | 5000K | *8,800 | 80 | 110 | -40 to 50°C | >96,000 |
| 2 Tube | | | | | | | |
| ETG-LRP-2120 | 80 | 5000K | *11,400 | 120 | 95 | -30 to 40°C | >96,000 |
| ETG-LRP-2160 | 80 | 5000K | *15,200 | 160 | 95 | -40 to 50°C | >96,000 |
| ETG-LRP-2160-P1-C3 | 90* | 5000K | *14,400 | 160 | 90 | -40 to 50°C | >96,000 |
| ETG-LRP-2160H | 80 | 5000K | *17,600 | 160 | 110 | -40 to 50°C | >96,000 |
| 3 Tube | | | | | | | |
| ETG-LRP-3240 | 80 | 5000K | *22,800 | 240 | 95 | -40 to 50°C | >96,000 |
| ETG-LRP-3240-P1-C3 | 90* | 5000K | *21,600 | 240 | 90 | -40 to 50°C | >96,000 |
| ETG-LRP-3240H | 80 | 5000K | *26,400 | 240 | 110 | -40 to 50°C | >96,000 |
| 4 Tube | | | | | | | |
| ETG-LRP-4320 | 80 | 5000K | *30,400 | 320 | 95 | -40 to 50°C | >96,000 |
| ETG-LRP-4320-P1-C3 | 90* | 5000K | *28,800 | 320 | 90 | -40 to 50°C | >96,000 |
| ETG-LRP-4320H | 80 | 5000K | *35,200 | 320 | 110 | -40 to 50°C | >96,000 |
| 6 Tube | | | | | | | |
| ETG-LRP-6480 | 80 | 5000K | *45,600 | 480 | 95 | -40 to 50°C | >96,000 |
| ETG-LRP-6480-P1-C3 | 90* | 5000K | *43,200 | 480 | 90 | -40 to 50°C | >96,000 |
| ETG-LRP-6480H | 80 | 5000K | *52,800 | 480 | 110 | -40 to 50°C | >96,000 |

8' LINEAR - OPERATING CHARACTERISTICS / ORDERING INFORMATION

| MODEL | CRI | CCT° | LUMENS *Estimated | TOTAL WATTS | LUMENS/WATTS | TEMPERATURE | L90 HOURS |
|---------------|-----|-------|----------------------|-------------|--------------|-------------|-----------|
| 1 Tube | | | | | | | |
| ETG-L8RP-1120 | 80 | 5000K | *11,400 | 120 | 95 | -30 to 40°C | >96,000 |
| ETG-L8RP-1160 | 80 | 5000K | *15,200 | 160 | 95 | -40 to 50°C | >96,000 |
| 2 Tube | | | | | | | |
| ETG-LRP-2320 | 80 | 5000K | *30,400 | 320 | 95 | -30 to 40°C | >96,000 |

*Red Enhanced; °3500K & 4000K CCT options available.

LED REMOTE PHOSPHOR LINEAR HIGH BAY LIGHTING - 4' and 8'

| POWER | | | | |
|------------|-------------------------|------|---------|------|
| Product ID | Description | 4ft. | 4ft - H | 8ft. |
| P1 | ON/OFF 90~305 VAC/Tube | ✓ | ✓ | ✓ |
| P2 | INTERNAL 480 VAC/Tube | ✓ | ✓ | ✓ |
| P3 | Dimming 48 VDC/Tube | ✓ | ✓ | ✓ |
| P4 | Dimming 90~305 VAC/Tube | ✓ | ✓ | ✓ |
| P5 | Dimming 24 VDC/Tube | ✓ | ✓ | ✓ |

| PHOSPHOR TYPE | | | | |
|---------------|---------------------|------|---------|------|
| Product ID | Description | 4ft. | 4ft - H | 8ft. |
| C1 | 5000K 80 CRI | ✓ | ✓ | ✓ |
| C2 | 4000K 80 CRI | ✓ | ✓ | ✓ |
| C3 | 5000K 90 CRI Red | ✓ | | ✓ |
| C4 | 4000K 90 CRI Red | ✓ | | ✓ |
| C5 | Dimming 24 VDC/Tube | ✓ | ✓ | ✓ |

| OPTIONS | | | | |
|------------|--|------|---------|------|
| Product ID | Description | 4ft. | 4ft - H | 8ft. |
| D1 | Step Dimming 30-100% | ✓ | ✓ | ✓ |
| D2 | Step Dimming 50-100% | ✓ | ✓ | ✓ |
| D3 | Step Dimming Adjustable | ✓ | ✓ | ✓ |
| G1 | 120V Plug (demo) | ✓ | ✓ | ✓ |
| L1 | Photo Sensor 120 VAC | ✓ | ✓ | ✓ |
| L2 | Photo Sensor 240/277 VAC | ✓ | ✓ | ✓ |
| L3 | Photo Sensor 480 VAC | ✓ | ✓ | ✓ |
| L4 | Ambient Light Sensor | ✓ | ✓ | ✓ |
| M1 | ON/OFF Motion Cold | ✓ | ✓ | ✓ |
| M2 | ON/OFF Motion Cold | ✓ | ✓ | ✓ |
| M3 | Programmable Motion Sensor | ✓ | ✓ | ✓ |
| M4 | Programmable Motion Sensor Cold | ✓ | ✓ | ✓ |
| M5 | Dual Motion Sensor | ✓ | ✓ | ✓ |
| M6 | Dual Motion Sensor Cold | ✓ | ✓ | ✓ |
| S | High Capacity Surge | ✓ | ✓ | ✓ |
| W1 | Wireless ON/OFF with Dimming | ✓ | ✓ | ✓ |
| W2 | Wireless +0-10 Input | ✓ | ✓ | ✓ |
| W3 | Wireless Thermistor | ✓ | ✓ | ✓ |
| W4 | Wireless +24 VDC Input | ✓ | ✓ | ✓ |
| ETG-LBR1* | 15-25ft. Low Bay Reflector | ✓ | ✓ | ✓ |
| ETG-HBR1* | 25-40ft. High Bay Reflector | ✓ | ✓ | ✓ |
| ETG-ABR1* | 30ft. Aisle or 40ft. Area Reflector | ✓ | ✓ | ✓ |
| ETG-YSM-5 | x2 Y-Style mounts, 2 hooks/each, 5 ft cable (will mount 1 linear light) | ✓ | ✓ | ✓ |
| ETG-WHM-5 | x2 Single Wire Mounts, one hook/each, 5 ft cable (Need 2 sets to mount 1 linear light) | ✓ | ✓ | ✓ |
| ETG-YTM-10 | x2 Y-Style Mounts, 2 Toggle Ends, 10 ft Cable (will mount 1 linear light) | ✓ | ✓ | ✓ |
| ETG-PSM | x1 pendant style mount (no mounting cables) | ✓ | ✓ | ✓ |

*requires 2 per tube for full direction control

| 4' LINEAR - WEIGHT & DIMENSIONS | | | | |
|---------------------------------|------------|--------|--------|--------|
| # Tubes | Weight | Width | Length | Height |
| 1 Tube | 3.53 lbs. | 3.10" | 49.00" | 3.00" |
| 2 Tube | 7.30 lbs. | 6.10" | 49.00" | 3.00" |
| 3 Tube | 10.90 lbs. | 10.60" | 49.00" | 3.00" |
| 4 Tube | 14.60 lbs. | 15.10" | 49.00" | 3.00" |
| 6 Tube | 21.80 lbs. | 24.10" | 49.00" | 3.00" |

| 8' LINEAR - WEIGHT & DIMENSIONS | | | | |
|---------------------------------|------------|-------|--------|--------|
| # Tubes | Weight | Width | Length | Height |
| 1 Tube | 7.50 lbs. | 3.10" | 96.00" | 3.00" |
| 2 Tube | 14.80 lbs. | 6.13" | 96.00" | 3.00" |

