

DL6A / DL6D REMOTE PHOSPHOR RETROFIT DOWNLIGHTS

FEATURES:

- Glare free and uniform light distribution
- High CRI and CCT, superior light quality
- Fully dimmable for power savings
- Up to 30% higher system efficacy compared to conventional LEDs
- -25°C to 45°C ambient temperature
- Fits standard 6" can enclosure
- Longer lifetime, virtually maintenance free
- Multi-fin casting design
- External driver
- Energy Star & IC rated, UL listed
- No UV or IR
- Instant strike
- Universal AC input



DL6A



DL6D


- No mercury
- Perfect for use within indoor applications, such as commercial & residential spaces
- 5 year warranty

OPERATING CHARACTERISTICS / ORDERING INFORMATION

MODEL	PRODUCT NUMBER	VOLTAGE	CRI	CCT	LUMENS *Estimate	TOTAL WATTS	LUMENS/WATTS	REPLACES	L90 HOURS
DL6A	DL6A-A4KT	100-120V	80	3000K	1,000	15.5	64.5	125W	> 50,000
	DL6A-C4KT	100-277V	80	3000K	1,000	15.5	64.5	125W	> 50,000
DL6D	DL6D-4KT	100-120V	80	3000K	800	14	57.1	100W	> 50,000

PHOTOMETRIC DIAGRAMS & DIMENSIONS

DL6A
Weight:
2.60lbs. [1.18kg]

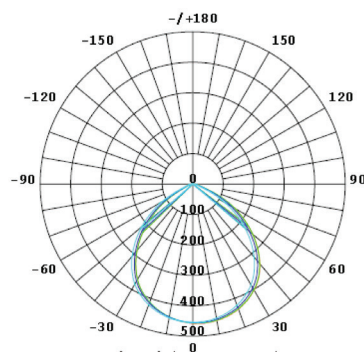

DL6D
Weight:
2.08lbs. [0.943kg]

