


WP40 LED REMOTE PHOSPHOR WALL PACK



MODEL ETG-WP40

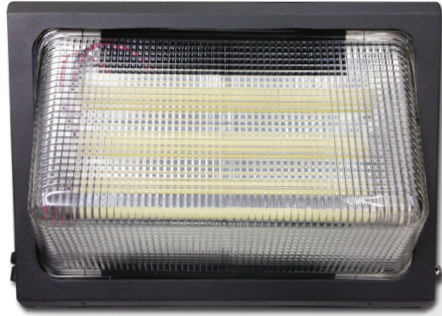

BOTTOM VIEW

FEATURES:

- Instant strike
- -40°C to 50°C ambient temperature
- Glare free and uniform light distribution
- Dimmable option, enabling the use of occupancy sensors for power savings
- Traditional aluminum enclosure
- Universal AC input/full range, 90-305 VAC
- Made in USA with global components

BENEFITS:

- Wide distribution linear remote phosphor engine
- Multiple mounting options
- Up to 30% higher system efficacy compared to conventional LEDs
- Wet location rated
- Longer lifetime
- No mercury
- 5 year warranty

OPERATING CHARACTERISTICS / ORDERING INFORMATION

MODEL	PRODUCT NUMBER	CRI	CCT	LUMENS *Estimated	TOTAL WATTS	LUMENS/WATTS	REPLACEMENTS
ETG-WP40	RP850	80	5000K	3,000*	40	75	100-150W (HID)
	RP840	80	4000K	2,850*	40	71.25	100-150W (HID)

ADDITIONAL OPTIONS

PRODUCT NUMBER	POWER
D1	Step Dimming 30-100%
D2	Step Dimming 50-100%
D3	Step Dimming Adjustable
L1	Photo Sensor 120 VAC
L2	Photo Sensor 240/277 VAC
L3	Photo Sensor 480 VAC
L4	Ambient Light Sensor
M3	Programmable Motion Sensor
M4	Programmable Motion Sensor Cold
S	High Capacity Surge
W1	Wireless ON/OFF with Dimming
W2	Wireless +0-10 Input
W3	Wireless Thermistor
W4	Wireless +24 VDC Input

POWER OPTIONS

PRODUCT NUMBER	POWER
P1	ON/OFF 90~305 VAC
P4	Dimming 90-305 VAC
P8	Dimming 24 VAC



WPC60

LED REMOTE PHOSPHOR WALL PACK



MODEL ETG-WPC60



BACK VIEW

FEATURES:

- Instant strike
- -40°C to 50°C ambient temperature
- Glare free and uniform light distribution
- Dimmable option, enabling the use of occupancy sensors for power savings
- Traditional brushed aluminum enclosure
- No uplight
- Universal AC input/full range, 90-305 VAC
- Made in USA with global components

BENEFITS:

- Wide distribution linear remote phosphor engine
- Multiple mounting options
- Full cut off
- Up to 30% higher system efficacy compared to conventional LEDs
- Wet location rated
- Longer lifetime
- No mercury
- 5 year warranty

OPERATING CHARACTERISTICS / ORDERING INFORMATION

MODEL	PRODUCT NUMBER	CRI	CCT	LUMENS *Estimated	TOTAL WATTS	LUMENS/WATTS	REPLACEMENTS
ETG-WPC60	RP850	80	5000K	4,500*	60	75	100-250W (HID)
	RP840	80	4000K	4,275*	60	71.25	100-250W (HID)

ADDITIONAL OPTIONS

PRODUCT NUMBER	POWER
D1	Step Dimming 30-100%
D2	Step Dimming 50-100%
D3	Step Dimming Adjustable
L1	Photo Sensor 120 VAC
L2	Photo Sensor 240/277 VAC
L3	Photo Sensor 480 VAC
L4	Ambient Light Sensor
M3	Programmable Motion Sensor
M4	Programmable Motion Sensor Cold
S	High Capacity Surge
W1	Wireless ON/OFF with Dimming
W2	Wireless +0-10 Input
W3	Wireless Thermistor
W4	Wireless +24 VDC Input

POWER OPTIONS

PRODUCT NUMBER	POWER
P1	ON/OFF 90~305 VAC
P4	Dimming 90-305 VAC
P8	Dimming 24 VAC

