


4' WHITE LED LINEAR HIGH BAY LIGHTING

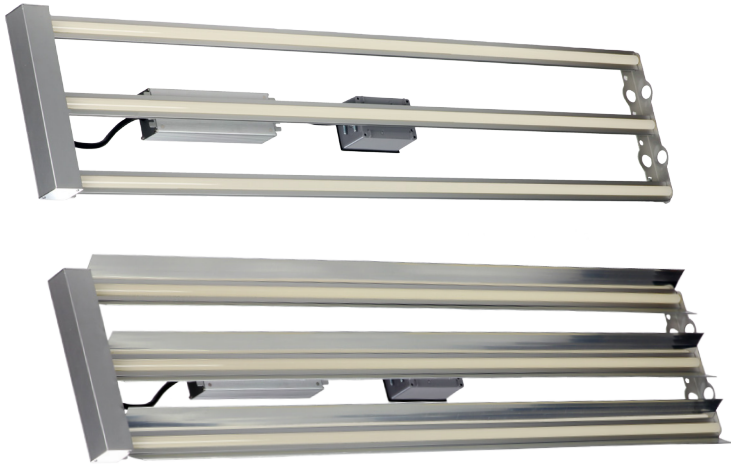

ETG -WLL

*3 Tube shown above with and without reflector option

FEATURES:

- Instant strike
- -40°C to 40°C ambient temperature
- Dimmable option, enabling the use of occupancy sensors for power savings
- Universal AC input/full range, 90-305 VAC
- Made in USA with global components

BENEFITS:

- No horizontal dust collecting surface bulbs
- No glass, no mercury
- >60,000 hours (L70)
- 5 year warranty

OPERATING CHARACTERISTICS / ORDERING INFORMATION

MODEL	CRI	CCT°	LUMENS *Estimated	TOTAL WATTS	LUMENS/WATTS	REPLACES
ETG-WLL-1080	80+	5000K	*6,875	80	86	2-3 Tube T8, 150W (MH)
ETG-WLL-2160	80+	5000K	*13,750	160	86	4 Tube T8, 250W (MH)
ETG-WLL-3240	80+	5000K	*20,000	240	83	6 Tube T5, 8 Tube T8, 400W (MH)
ETG-WLL-4320	80+	5000K	*27,500	320	86	750W (MH)
ETG-WLL-6480	80+	5000K	*41,250	480	86	1000W (HID)

* High-Intensity Discharge (HID) includes: Mercury Vapor, Metal Halide and High Pressure Sodium; °3500K & 4000K CCT options available.

OPTIONS	
Step Dimming 30-100%	D1
Step Dimming 50-100%	D2
Step Dimming Adjustable	D3
ON/OFF Motion	M1
ON/OFF Motion Cold	M2
High Capacity Surge	S
Wireless ON/OFF with Dimming	W1

MOUNTING HARDWARE	
x2 Y-Style mounts, 2 hooks/each, 5 ft cable (will mount 1 linear light)	ETG-YSM-5
x2 Single Wire Mounts, one hook/each, 5 ft cable (Need 2 sets to mount 1 linear light)	ETG-WHM-5
x2 Y-Style Mounts, 2 Toggle Ends, 10 ft Cable (will mount 1 linear light)	ETG-YTM-10
x1 pendant style mount (no mounting cables)	ETG-PSM

REFLECTORS*	
15-25ft. Low Bay Reflector	ETG-LBR1
25-40ft. High Bay Reflector	ETG-HBR1
30ft. Aisle or 40ft. Area Reflector	ETG-ABR1
8-20ft. White Reflector	ETG-WLBRO

*requires 2 per tube for full direction control

POWER	
ON/OFF 90~305 VAC/Tube	P1
INTERNAL 480 VAC/Tube	P2
Dimming 90~305 VAC/Tube	P4

WHITE LED LINEAR - WEIGHT & DIMENSIONS				
Model Number	Weight	Width	Length	Height
1 Tube	3.53 lbs.	3.10"	49.00"	3.00"
2 Tube	7.30 lbs.	6.10"	49.00"	3.00"
3 Tube	10.90 lbs.	10.60"	49.00"	3.00"
4 Tube	14.60 lbs.	15.10"	49.00"	3.00"
6 Tube	21.80 lbs.	24.10"	49.00"	3.00"