

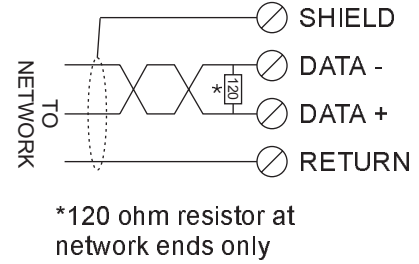


INPUT WIRING

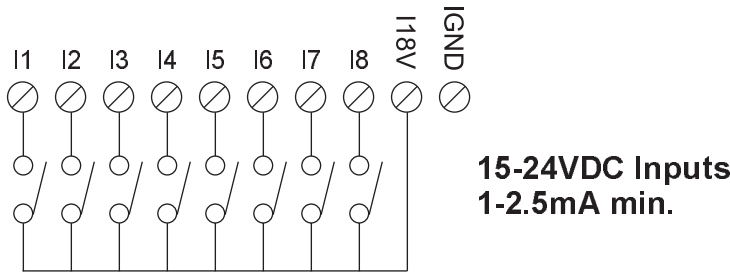

NETWORK WIRING

OUTPUT WIRING

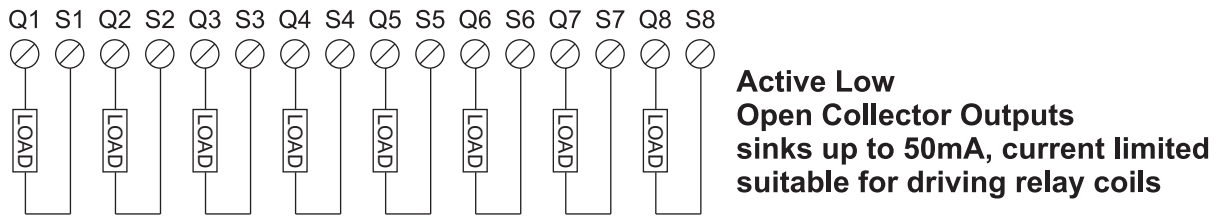

Description	Specification
Network Baud Rate	125 kbaud
Protocols Supported	CsCAN
Inputs Available	Eight 15-24VDC @ 1-2.5mA min
Outputs Available	Eight 24 VDC @ 0.5A PLC288
Power Required	Special external 24 VDC pwr. supply
Power Supply I/O Fuse	15A, Field Replaceable
Power Supply Main Fuse	20A, Field Replaceable