## Maple Systems, Inc.

## **Dimensional Outline,** MAP460D-240B

7.580"±0.010" [192.5mm±0.25mm] typical

7.46"±0.015" [189.5mm±0.4mm]

5.40"±0.015"


[137.2mm±0.4mm] typical

0.180"±0.015" [4.6mm±0.4mm]

0.060"±0.015" [1.5mm±0.4mm]




Top View

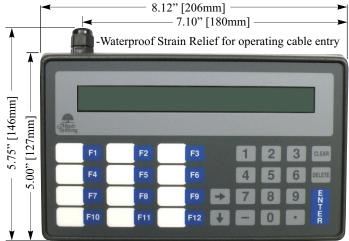


[113.3mm±0.25mm] typical 104.1mm±0.4mm 4.460"±0.010" 4.10"±0.015" PANEL CUTOUT R 0.03" [0.76mm] 0.156" [4mm] maximum, 4 places diameter, 4 holes

0.156" [4mm] diameter, nominal, 4 clearance holes for #6 screws, 6-32UNC x 0.30" [8mm] 0.138" [3.5mm] diameter deep threads, for Pedestal Mounting only MAP460D-240B (€

Front View

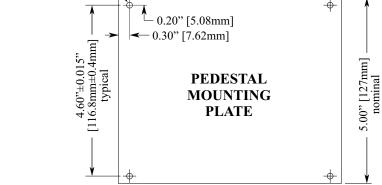

Rear View 6-32UNC x 0.50" [13mm] screw, SS, 4 places

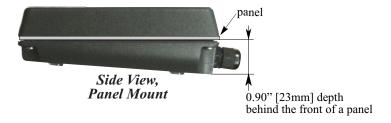



6.00" [152mm] nominal

Side View Free Standing and Pedestal Mount

- 1. Dimensions are in inches [mm].
- 2. Holes are symmetrically located on the centers of the cutout and plate.
- 3. For proper seal, use a thick, stiff plate or panel material, 0.125" [3.2mm] thick minimum.