

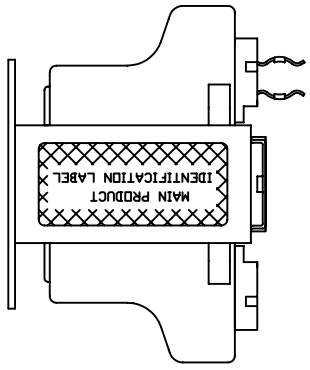


Transformer Specifications	
PRIMARY VOLTAGE(S)	240x480
SECONDARY VOLTAGE(S)	24
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	2.7 LBS

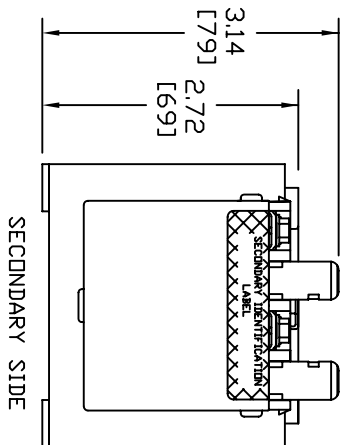


SECONDARY SIDE PRIMARY SIDE


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN.
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2".
 3. ALL MEASUREMENTS IN INCHES(MM).

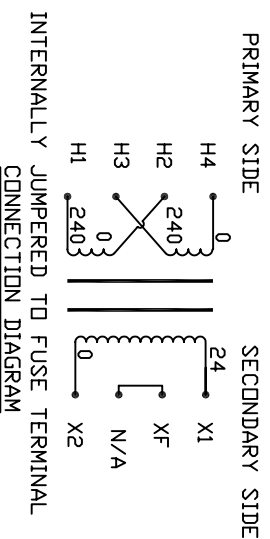

PRIMARY IDENTIFICATION LABEL

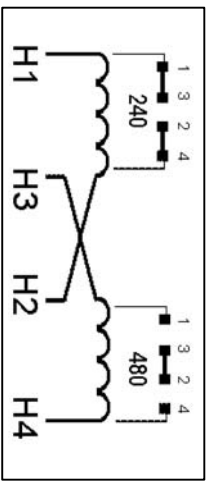

SECONDARY IDENTIFICATION LABEL

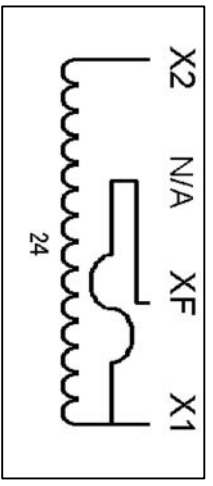

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL
 7700 SHELTER
 800 664-4660
 WWW.MICRONTRANSFORMERS.COM

Impervitran
 U.S. PAT. NO. 3,516,040
 50VA 50/60Hz
 TEMP CL. 105°C

CAT. NO. B050PU7JK
 SERIES 2

UL Listed 702X
 111083

DATE	BY	REVISION	DESCRIPTION
3/11/08	JG/V	0001	REVISED TO ADD APPROVED

MICRON PART NO.	B050PU7JK
MICRON SCALE	1:1
MICRON INDEX	C