



TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

| INPUT VOLTAGE | H4-H2 | H4-H1 | OUTPUT VOLTAGE | XF-X2 | XF-X1 |
|---------------|-------|-------|----------------|-------|-------|
| H4-H3         | 240   | 480   | 25             | 120   |       |
| ..            | 230   | 460   | 24             | 115   |       |
| 208           | 220   | 440   | 23             | 110   |       |

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF

CONNECTION TABLE LABEL




| Transformer Specifications |                      |
|----------------------------|----------------------|
| PRIMARY VOLTAGE(S)         | 208/230/460 (TRIPLE) |
| SECONDARY VOLTAGE(S)       | 24/115               |
| RATED V.A.                 | 75                   |
| RATED FREQUENCY            | 50/60                |
| INSULATION CLASS           | 105                  |
| AGENCY APPROVALS           | UL/CUL               |
| ESTIMATED WEIGHT           | 5.5 LBS              |

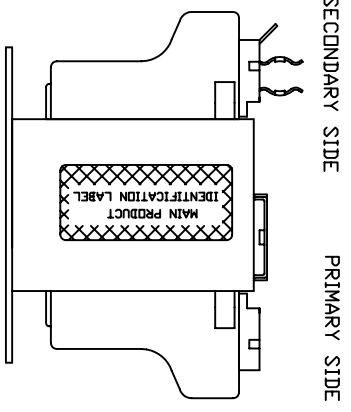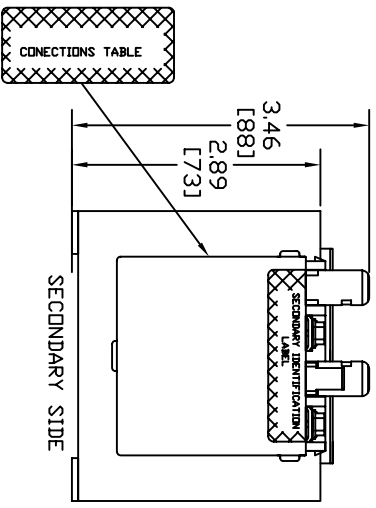

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

MAIN PRODUCT IDENTIFICATION LABEL

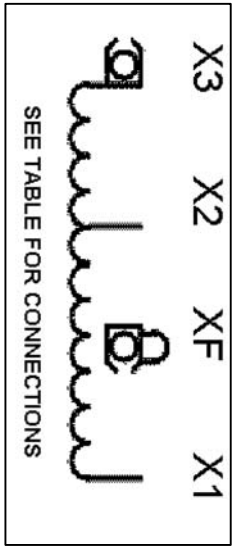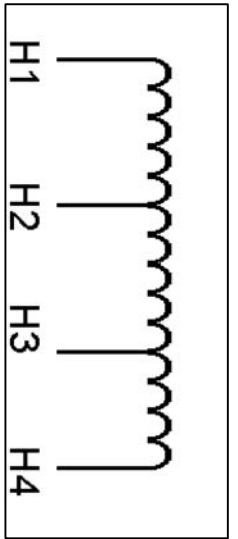

CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

| QUANTITY | DESCRIPTION |
|----------|-------------|
| 1        | Transformer |
| -        | ...         |
| -        | ...         |

**MICRON IMPERTITRAN**  
 U.S. PAT. NO. 3,517,610  
 75VA 50/60Hz  
 TEMP. CL. 105°C  
 CAT NO. B075-2001-1  
 SERIES 2  
 020983

**MICRON INDUSTRIES CORPORATION**  
 1400 S. GARDNER ST. #100  
 MESA, AZ 85204  
 480-942-1000  
 www.microntransformers.com

DATE: 1/15/08  
 REVISION: 001  
 DRAWN: JLV  
 CHECKED: [Signature]  
 APPROVED: [Signature]

SIZE: C  
 SCALE: NONE  
 PART NO.: B075-2001-1