

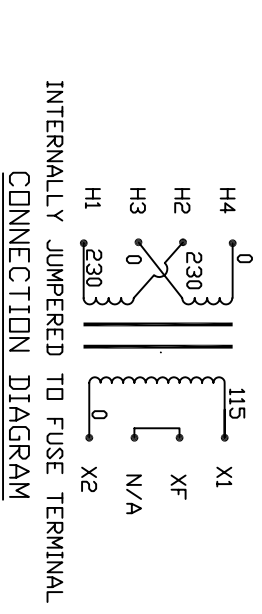
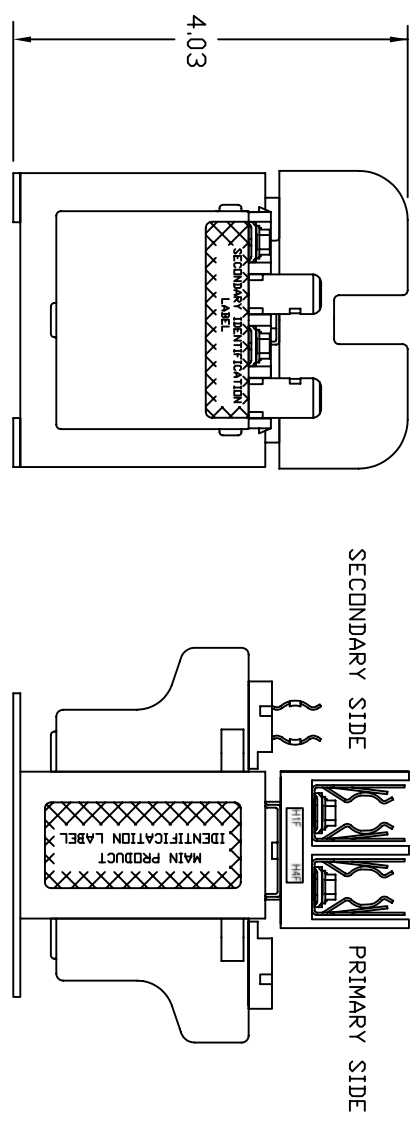
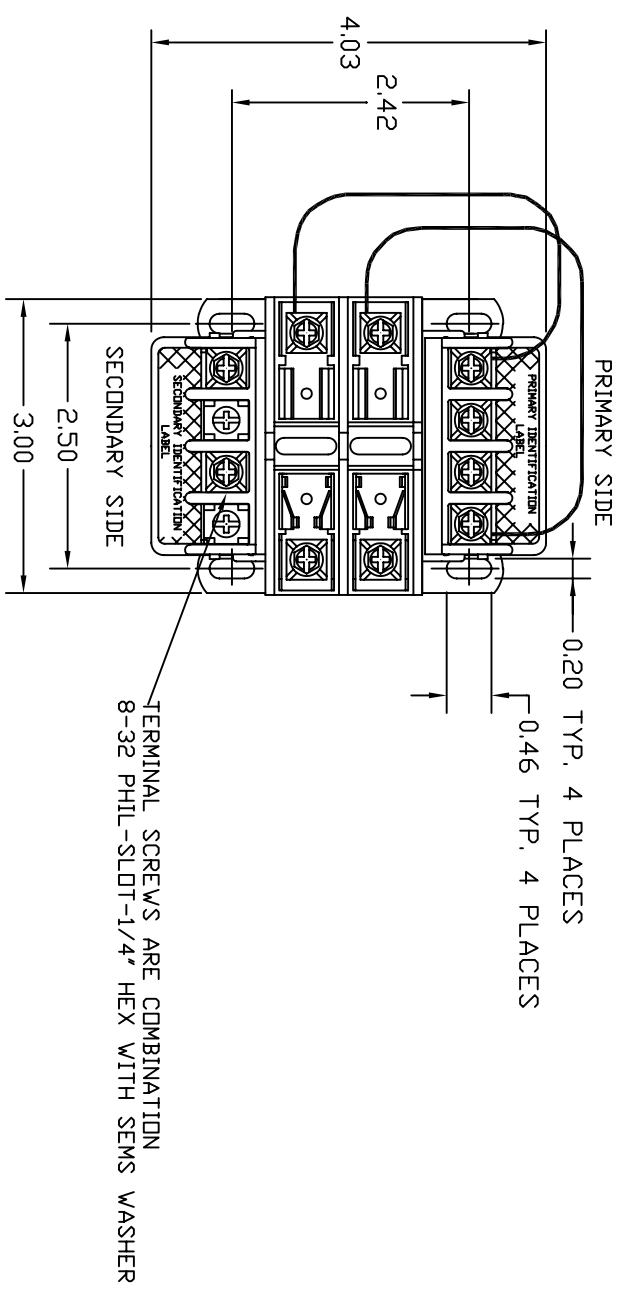


Transformer Specifications	
PRIMARY VOL TAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOL TAGE(S)	115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.4 LBS

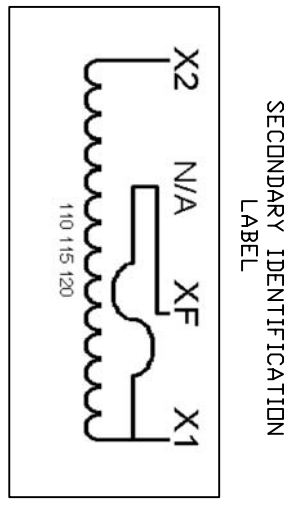

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

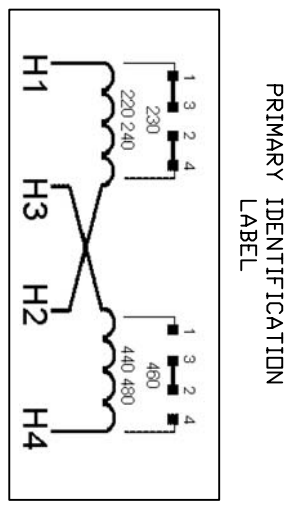

MAIN PRODUCT IDENTIFICATION LABEL

**MICROCON**  
TRANSFORMERS  
800 664-4660  
www.MicroTransformers.com

**ImpervITRAN**  
U.S. PAT. NO. 3,516,040

75VA 50/60HZ  
TEMP CL. 105°C

**UL** **US** CAT. NO. B075BTZ13RB  
Listed 702X SERIES 2 50072

MICROCON PART NO.	SCALE	TEST NAME
B075BTZ13RB		

DATE	BY	REVISION	APPROVED
10/29/07	JGV	00003	

MICROCON INDUSTRIES CORPORATION  
TRANSFORMER DIV.  
174 GARDNER AVE., GARFIELD, ILL. 62433  
www.MicroTransformers.com