


Transformer Specifications	
PRIMARY VOLTAGE(S)	120x240
SECONDARY VOLTAGE(S)	24
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	3.4 LBS


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER




SEC.FUSECLIPS INTERNALLY JUMPED
 CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

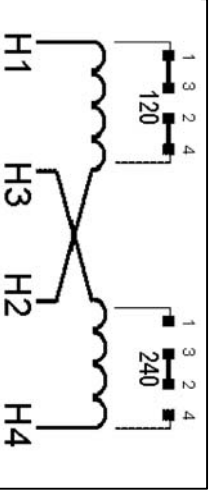

SECONDARY IDENTIFICATION LABEL

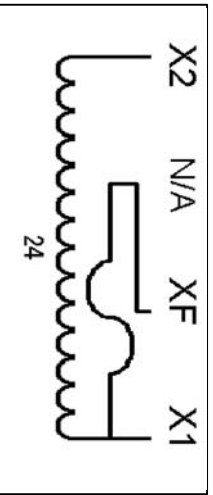

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
 800 664-4660
 www.microntransformers.com

Impervitran
 U.S. PAT. NO. 3,516,040
 75VA 50/60HZ
 TEMP CL. 105°C

UL LISTED 702X
 CAT. NO. B075LP7JK
 SERIES 2
 10084

PACKAGED ACCESSORIES

1	ONE PAIR OF J2 JUMPERS
-	-
-	-

DATE	SCALE	REV	BY	CHKD	APP'D
1/10/07					

MICRON INDUSTRIES CORPORATION
 7470 CHURCH ROAD, EL PASO, TEXAS 75041-1005
 TEL: 972-835-1000 FAX: 972-835-1001
 www.microntransformers.com

SIZE	SCALE	REV	BY	CHKD	APP'D
C	NONE				

B075LP7JK