

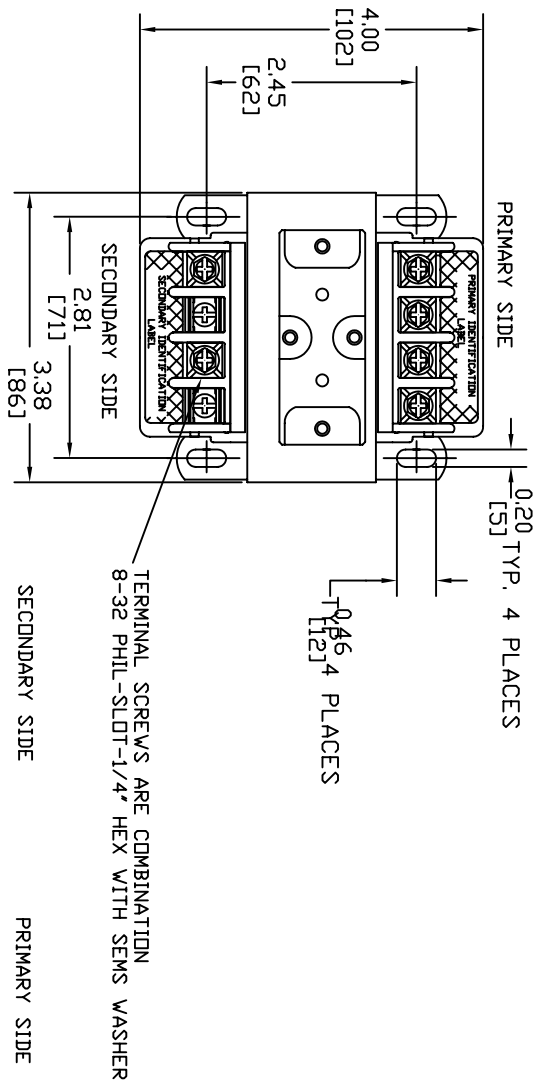


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	100
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	4.5 LBS

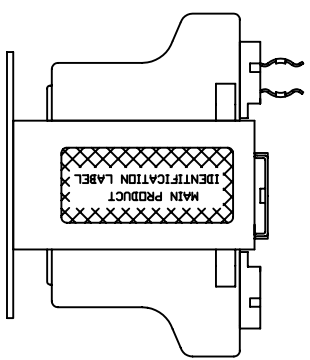


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

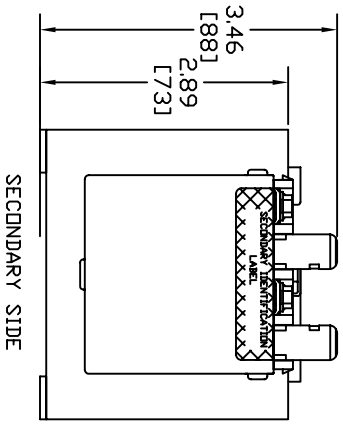



MAIN PRODUCT IDENTIFICATION LABEL

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

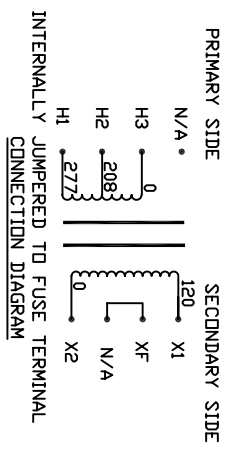

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

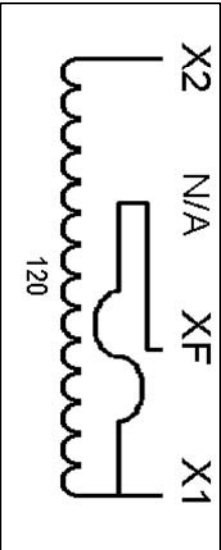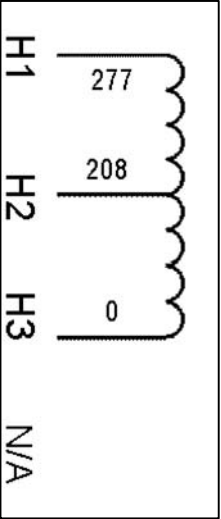

MICRON
TRANSFORMER DIVISION
800 664-4660
www.MicronTransformers.com

Impervitran
U.S. PAT. NO. 3,516,040

100VA 50/60Hz
TEMP CL. 105°C

CAT. NO. B100MQ15XK
SERIES 2

05084

UL US LISTED 792X

PACKAGED ACCESSORIES	
1	
-	
-	

MICRON
DATE 12/3/07
RELEASE DATE 12/3/07
DRAWN J.G.V.
CHECKED
APPROVED

MICRON INDUSTRIES CORPORATION
17700 GARDNER ROAD, SUITE 100
GARDNER, MA 01905
www.MicronTransformers.com

SCALE
C NONE

B100MQ15XK