
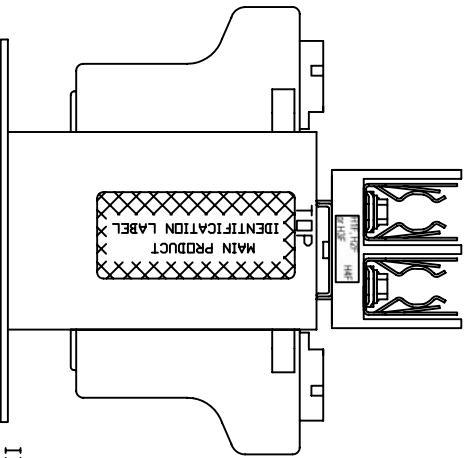
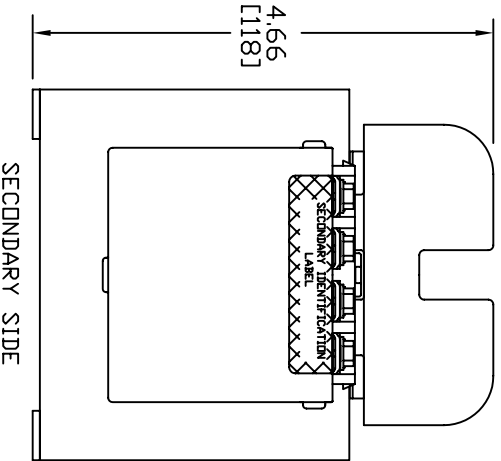


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	6.9 LBS

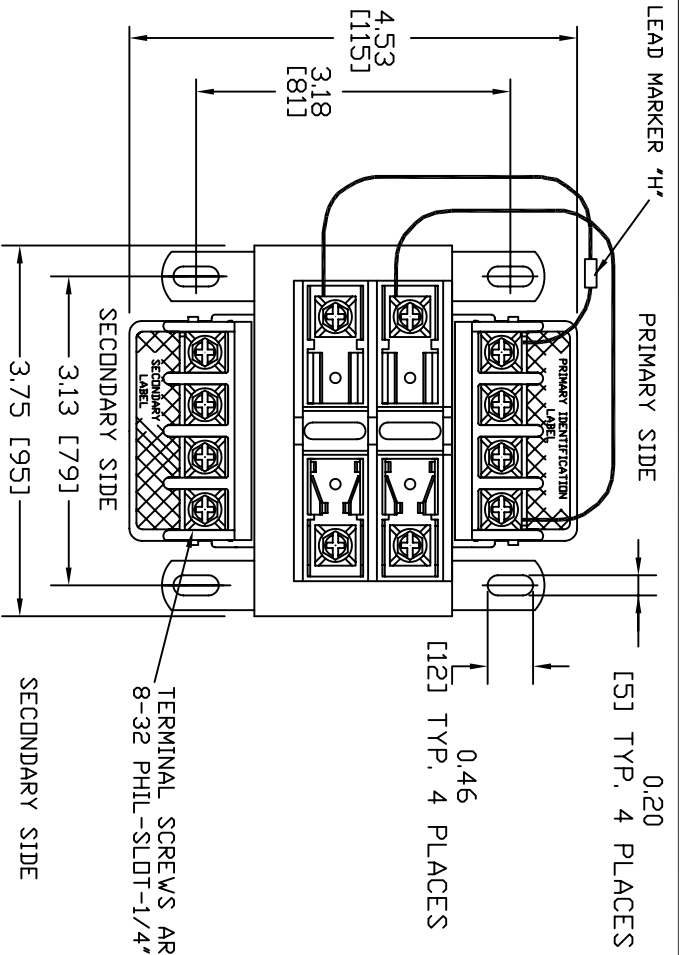


MAIN PRODUCT IDENTIFICATION LABEL


SECONDARY SIDE

SECONDARY SIDE

PRIMARY SIDE

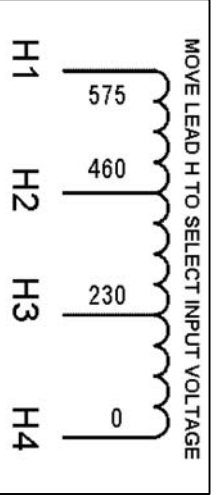


PRIMARY IDENTIFICATION LABEL

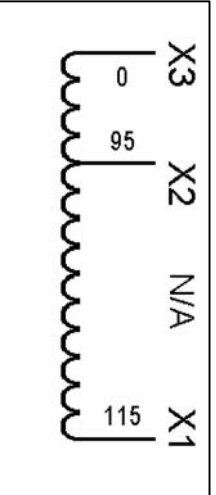

SECONDARY IDENTIFICATION LABEL

NOTE:
 1. TORQUE CONNECTIONS TO 16 LB-IN
 2. ALL MEASUREMENTS IN INCHES (MM)

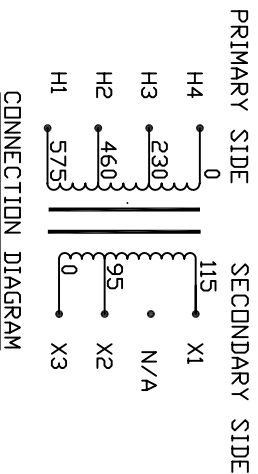

MICRON IMPERVITRAN
 TRADE CENTER
 800 664-4660
 www.MicronTransformers.com

U.S. PAT. NO. 3576040

150VA 50/60Hz

TEMP CL. 130°C

CAT. NO. B150BTW37RXF
 SERIES 2

05082

UL US LISTED 702X

PACKAGED ACCESSORIES

1

MICRON TRANSFORMER

DATE: 6/13/07

SCALE: NONE

REV: C

177 CUNICH ROAD
 ELKHART, IN 46516-3025
 TEL: 800-664-4660
 www.MicronTransformer.com

MICRON INDUSTRIES CORPORATION

DATE: 6/13/07

SCALE: NONE

REV: C

B150BTW37RXF