

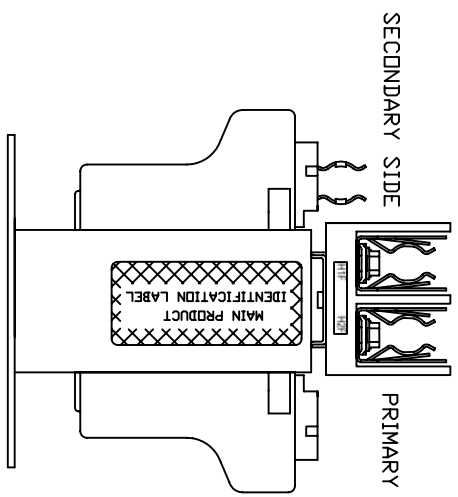


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

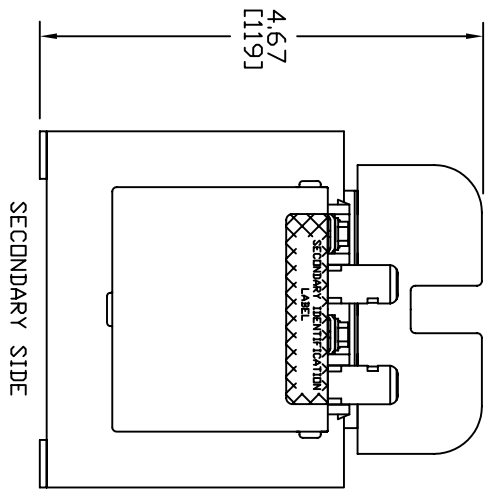


MAIN PRODUCT IDENTIFICATION LABEL

Transformer Specifications	
PRIMARY VOLTAGE(S)	575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED VA.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.4 LBS




INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN.
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2".
 3. ALL MEASUREMENTS IN INCHES(MM).

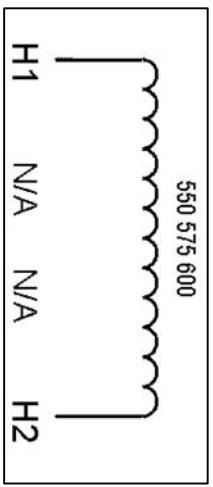

PRIMARY IDENTIFICATION LABEL

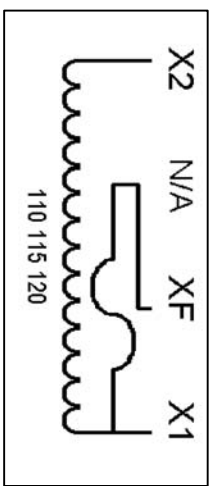

SECONDARY IDENTIFICATION LABEL

MICRON **Impervitran**
 U.S. PAT. NO. 3516040
 150VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B150WZ13RKF
 SERIES 2
 03082

CONTROL TRANSFORMER
 800 664-4660
 www.microntransformers.com

UL US LISTED 702X

PACKAGED ACCESSORIES	
1	
-	
-	

DATE	1/11/08	SCALE	
RELIEF	JGV	APPROVED	
DATE		SCALE	
RELIEF		APPROVED	

MICRON INDUSTRIES CORPORATION
 17400 S. GARDEN LANE, SUITE 200
 HUNTSVILLE, AL 35894
 www.microntransformers.com

MICRON
 PART NO. B150WZ13RKF