


PRIMARY SIDE

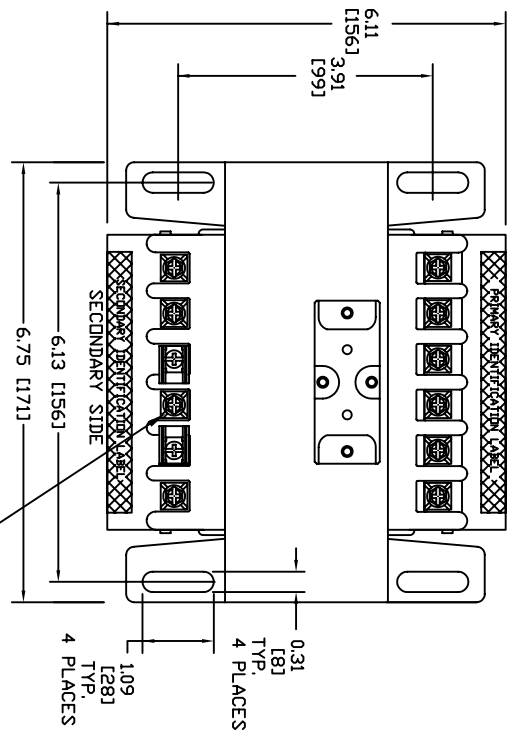


Transformer Specifications


PRIMARY VOLTAGE(S)	230x460 (TRIPLE)
SECONDARY VOLTAGE(S)	115
RATED V.A.	1000
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	30.5 LBS

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

SECONDARY SIDE

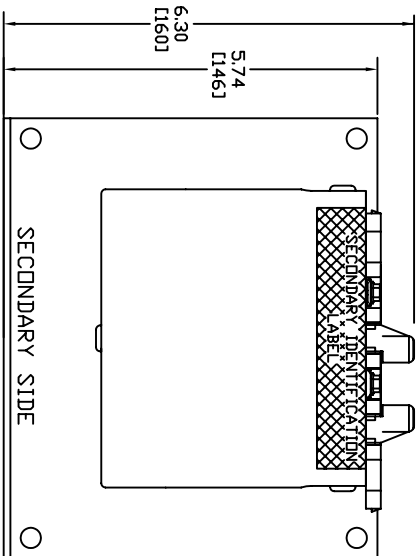


PRIMARY SIDE

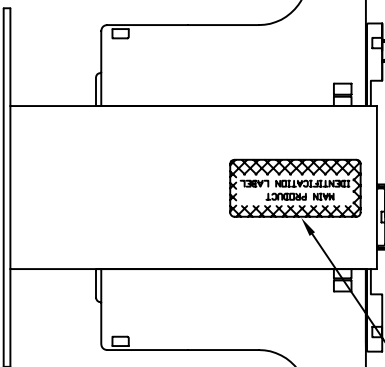

TOP OF LABEL TOWARD PRIMARY SIDE

PRIMARY SIDE SECONDARY SIDE




N/A • N/A
INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM


NOTE:

1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
2. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

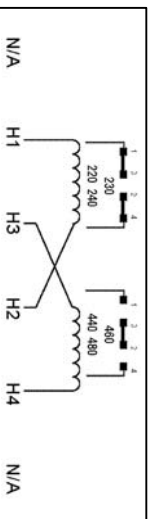

SECONDARY IDENTIFICATION LABEL

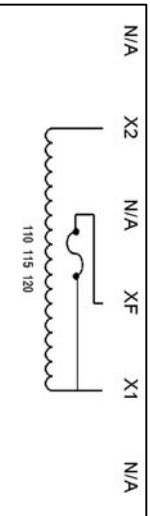

MAIN PRODUCT IDENTIFICATION LABEL

MICRON
CONTRACT MANUFACTURER
U.S. PAT. NO. 3616040
800 664-4560
www.microntransformers.com

Impervitran
1.0KVA 50/60HZ
TEMP CL. 130°C

CAT. NO. B1K0BT13JKF
SERIES 2
44075

UL US LISTED 702X

PACKAGED ACCESSORIES
1 1 PAIR OF JUMPERS

DATE	11/7/07	ISSUED	REVISED
DESIGNED BY	J.G.V.	DESIGNED	REVISED
DRWING NO.		DRWING NO.	
SCALE	C	SCALE	C
NAME	B1K0BT13JKF	NAME	B1K0BT13JKF