

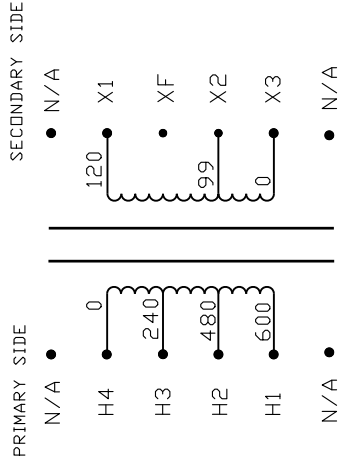


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	1500
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	46.0 LBS


FOR TEST REQUIREMENTS SEE 419-0079 COIL TEST PAGE

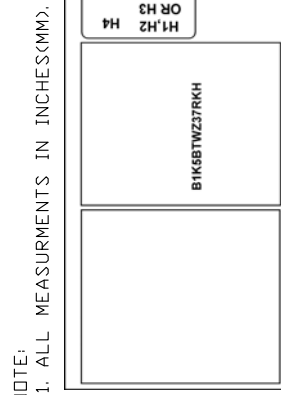

CONNECTION DIAGRAM

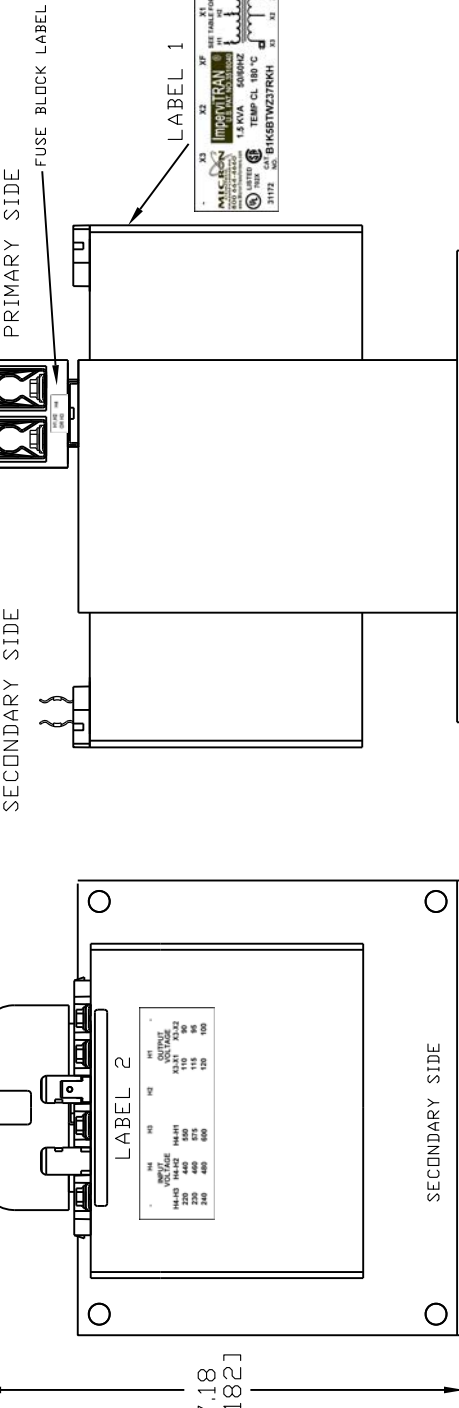

NOTE:
1. ALL MEASUREMENTS IN INCHES(MM).



LABEL 1

LABEL 1

LABEL 2

MICRON TRANSFORMERS
702X
LISTED
UL
31172 NO. **B1K5BTWZ37RKH**
1.5 KVA 50/60HZ
TEMP CL 180 °C
CAT. **B1K5BTWZ37RKH**
SEE TABLE FOR CONNECTIONS
X1 X2 X3 X4
H1 H2 H3 H4
X3-X2
X3-X1 X3-X2
110 90
115 95
120 100

H4-H3	H4-H2	H4-H1	H1
220	440	550	X3-X1
230	460	575	X3-X2
240	480	600	110
			115
			120
			90
			95
			100

PACKAGED ACCESSORIES

1	-
-	-
-	-
-	-

MICRON TRANSFORMERS CORPORATION
7177 CHURCH ROAD, ELKHURST, IL 60126
Tel. (800)664-4660, (630)956-1822 Fax (630)956-1899
www.MicroTransformers.com
DATE 7/31/17 DRAWN JMV CHECKED APPROVED
RELEASE DATE CUSTOMER PART NO.
MICRON PART NO. B1K5BTWZ37RKH
SCALE NONE
SIZE C

REV	DESCRIPTION	DATE
B	REDRAWN FROM LEGACY Z2	AN006144 JMV 7/31/17
ECL	REVISIONS	BY DATE