
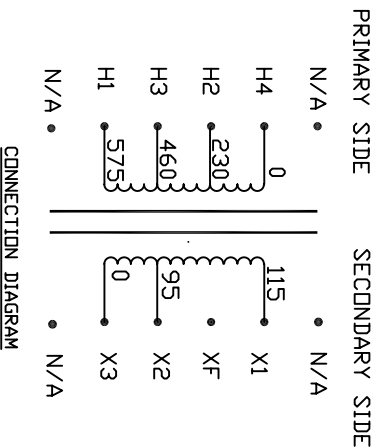
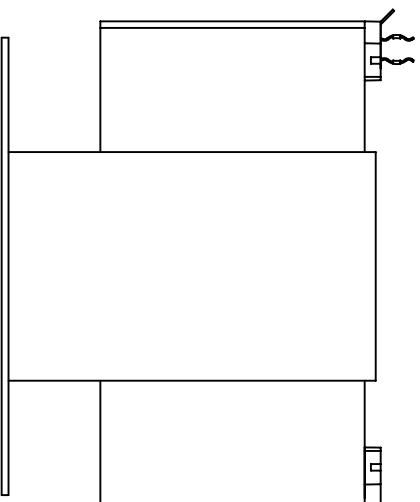
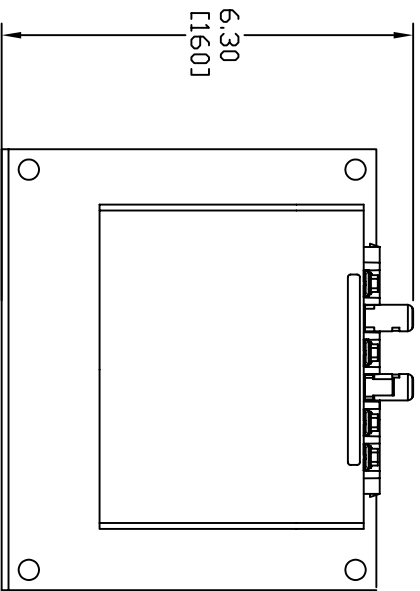


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	1500
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	44.2 LBS

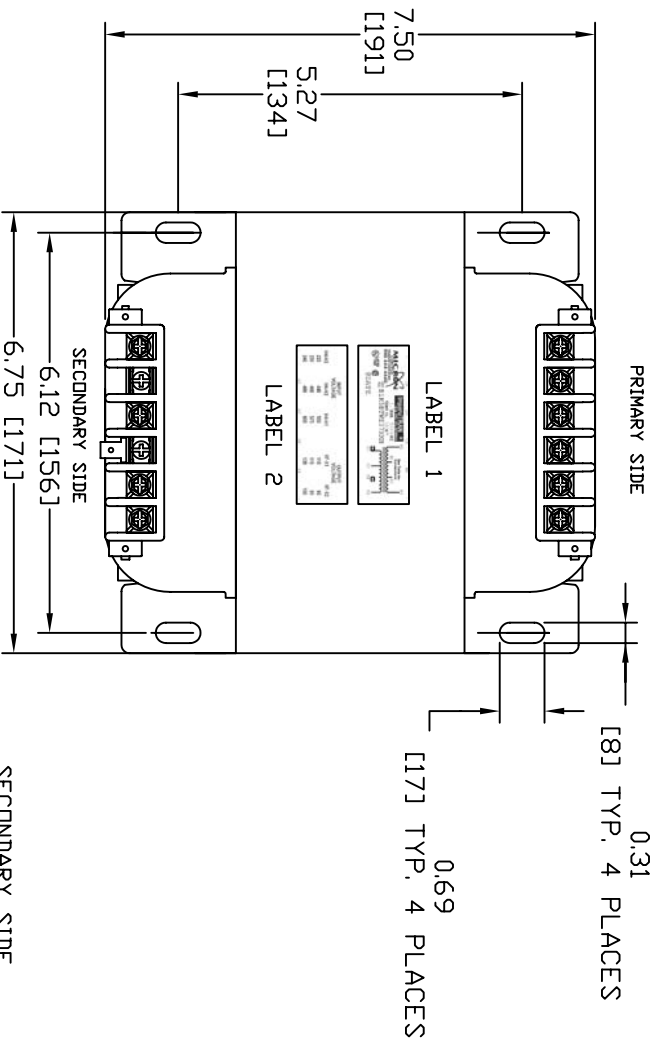

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

LABEL 1

LABEL 2

MICRON THE
TRANSFORMER
ROD 064-4680
NO. B1K5BTWZ37XKH
GDATE

Impervitrax
1.5KVA 50/60HZ
TEMP CL. 180C°

See Table for Connections

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	XF-X1
220	110
440	550
480	575
480	600
	XF-X2
	90
	95
	100

PACKAGED ACCESSORIES

MICRON MICRON INDUSTRIES CORPORATION
TECHNICAL DEPARTMENT
14000 W. 10TH AVE., SUITE 100
DENVER, CO 80232
TEL: (303) 475-1200
FAX: (303) 475-1201
WWW.MICRONTRANSFORMER.COM

DATE: 11/9/07
DRAWN: J.G.V.
CHECKED: []
APPROVED: []

MICRON PART NO. B1K5BTWZ37XKH

SCALE: 1:1
SIZE: C
INDIC: []