

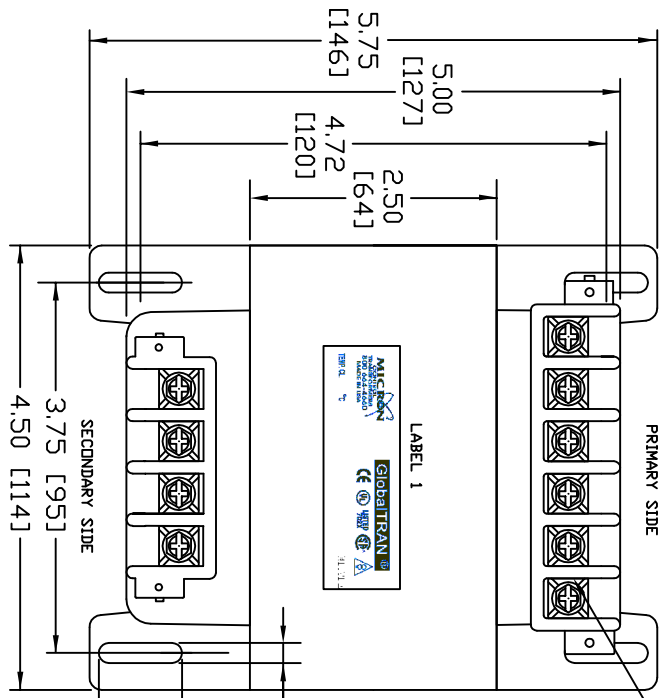


TERMINAL SCREWS ARE COMBINATION
10-32 PHIL-SLOT-1/4" HEX
WITH SEMS WASHER

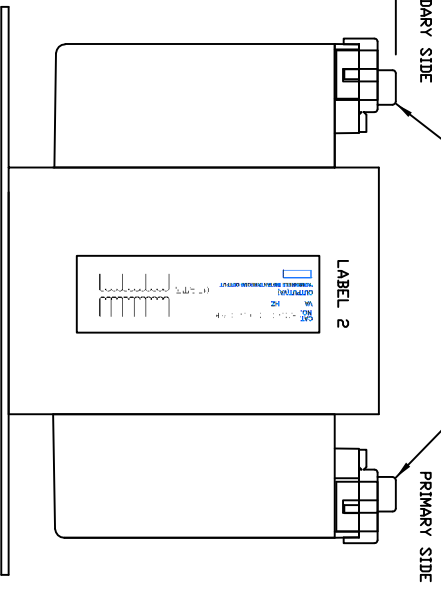


0.20 [5] TYP. 4 PLACES
0.84 [21] TYP. 4 PLACES

FOR CLARITY TOUCHPROOF TERMINAL
COVERS SHOWN ON END VIEW ONLY

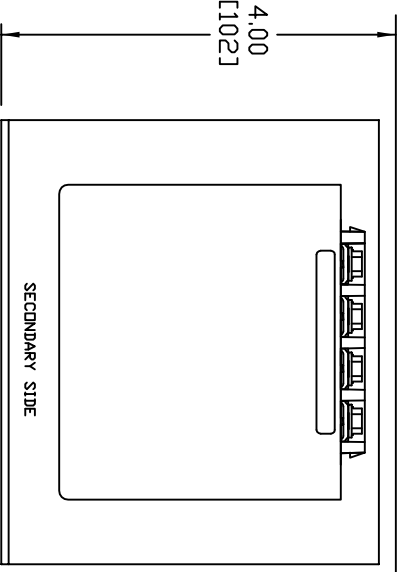

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/400/460/575
SECONDARY VOLTAGE(S)	24/115/230
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	131 LBS

TEST REQUIREMENTS	
WINDING	H6-H5-H4-H3-H2-H1 X4-X3-X2-X1
D.C. VOLTS	208.3-229.8-399.9-459.7-575 25.7-123.6-245.6
LOAD VOLTS	208-230-400-460-575 24-115-230
F.L. AMPS	1.387/0.555 10.42/2.174/1.087
HI-POT	4800V 3000V
EXCITING AMPS	0.37AMPS @ 575 VOLTS, 50HZ
EXCITING WATTS	30.0

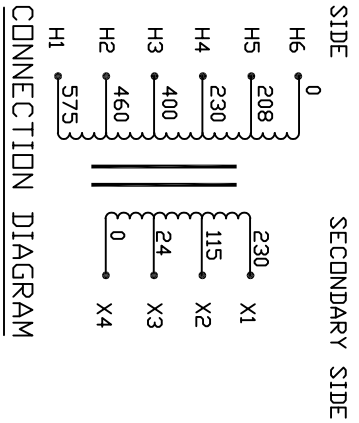

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

MICRON
TRANSFORMERS
800.664.4660
MADE IN USA
TEMP. CL. 30°C

GlobalTRAN
UL LISTED
UL 7024
@DATE

CAT. B250-2263-GAF
VA. 250 VA
HZ 50/60
OUTPUT VA. 250 VA
ADJUSTABLE INSTANTANEOUS OUTPUT

Label 1

Label 2

REV.	DESCRIPTION	DATE
A	FORMAT REVISED	6/9/09
ECL	REVISIONS	

MICRON INDUSTRIES CORPORATION
CONTRACT MANUFACTURER
14100 W. 10th St., Suite 100
Tulsa, Oklahoma 74116
Tel: (800)664-4660 Fax: (580)461-1880
www.microntransformers.com

DATE: 6/9/09
RELEASE DATE: 6/9/09
PART NO.: B250-2263-GAF
REV. NO.: B250-2263-GAF A77777A0
B250-2263-GAF A77777B0
B250-2263-GAF

QTY	DESCRIPTION	REV.	DATE
1	PACKAGED ACCESSORIES	-	-
-		-	-
-		-	-