


0,20
[5] TYP. 4 PLACES

0,46
[12] TYP. 4 PLACES


TERMINAL SCREWS ARE COMBINATION
8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.4 LBS

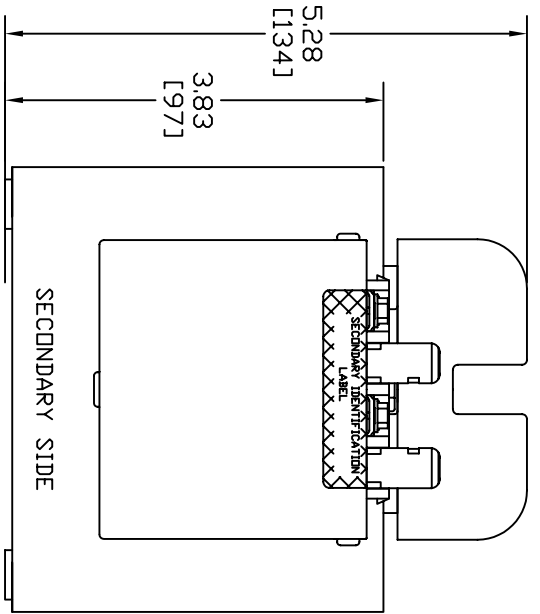


SECONDARY SIDE

PRIMARY SIDE

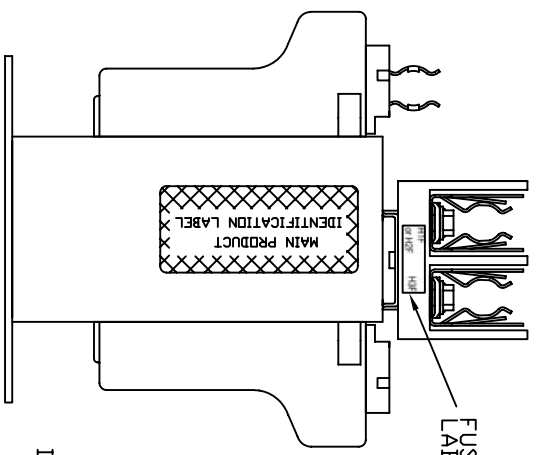



MAIN PRODUCT
IDENTIFICATION LABEL

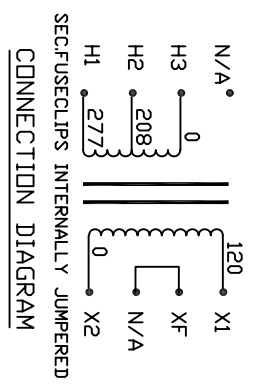

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

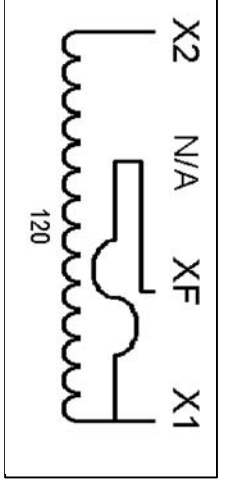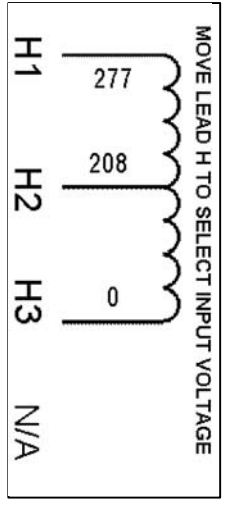

MICRON **Impervitran**
 U.S. PAT. NO. 3,516,040
 250VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B250MQ15RKF
 SERIES 2
 14082

MICRO **TRANSFORMERS**
 800 664-4660
 www.MicronTransformers.com

UL us
 Listed 702X

PACKAGED ACCESSORIES	
DATE	3/17/08
RELEASE DATE	
REVISION	
DESIGNED BY	JGV
CHECKED BY	
APPROVED BY	
MICRON PART NO.	B250MQ15RKF

MICRON INDUSTRIES CORPORATION
 17700 CHURCH ROAD
 FORT WORTH, TEXAS 76155
 817-335-1500
 www.MicronTransformer.com