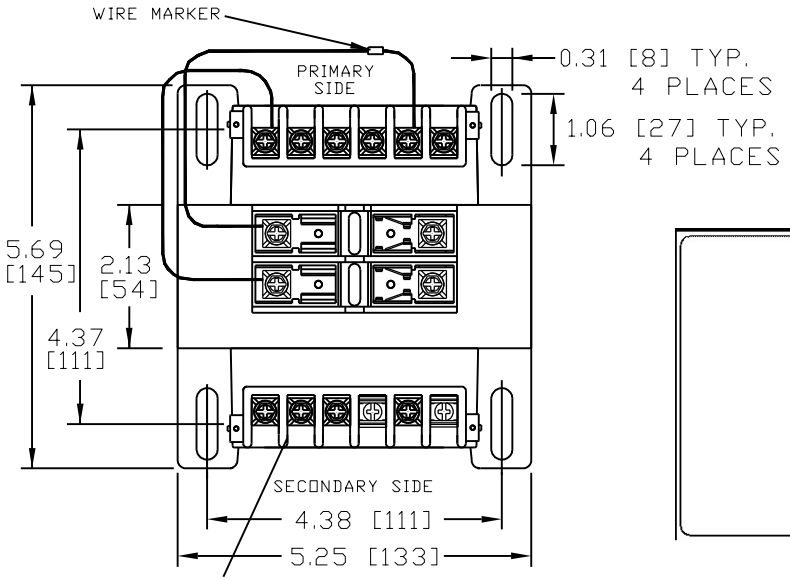

TERMINAL SCREWS ARE COMBINATION
10-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

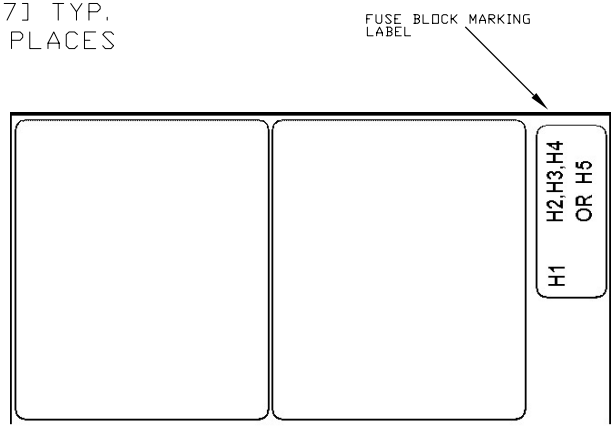

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	15.0 LBS

FOR TEST REQUIREMENTS SEE 415-0144 COIL TEST PAGE

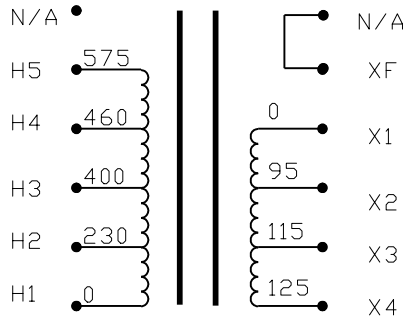

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

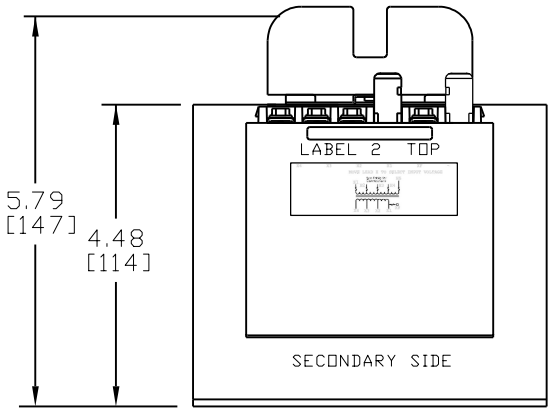

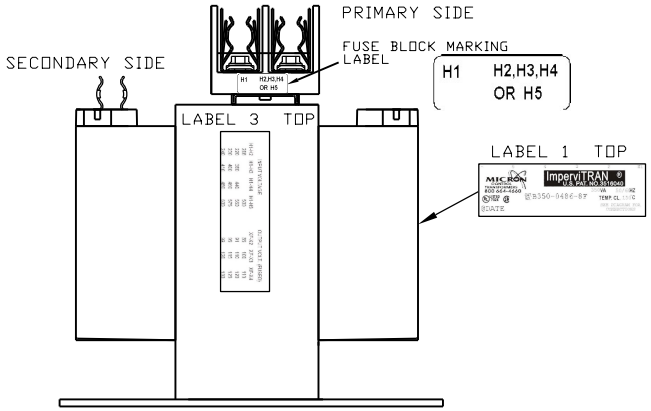

LABEL 1 TOP

- 5 4 3 2 H1

MICRON CONTROL TRANSFORMERS 800 664-4660 www.MicronTransformers.com

ImperviTRAN ® U.S. PAT. NO.3516040

350VA 50/60 HZ

UL LISTED 702X CSA CAT. NO. B350-0486-8F TEMP CL 130 °C

39144 SEE DIAGRAM FOR CONNECTIONS

LABEL 2 TOP

X4 X3 X2 X1 XF -

MOVE LEAD H TO SELECT INPUT VOLTAGE
SEE TABLE FOR CONNECTIONS



TOP

LABEL 3

INPUT VOLTAGE				OUTPUT VOLTAGE (FUSED)		
H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
208			500	85	100	110
220	380	440	550	91	110	120
230	400	460	575	95	115	125
240	416	480	600	99	120	130

PACKAGED ACCESSORIES	
1	
–	–
–	–

ECL	REVISIONS	BY	DATE
	DRAWING UPDATED	J.V	11/1/13
	CORRECT FUSE BLOCK LABEL MARKING	PJA	11/06/12
A	REDRAWN	J.V	1/21/08

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
1/21/08	J.G.V		

RELEASE DATE | CUSTOMER PART NO.

MICRON PART NO. B350-0486-8FA7777A0
B350-0486-8FA7777B0

SIZE C | SCALE NONE

B350-0486-8F