
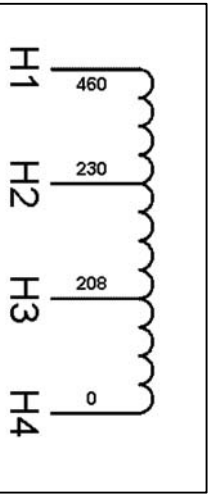
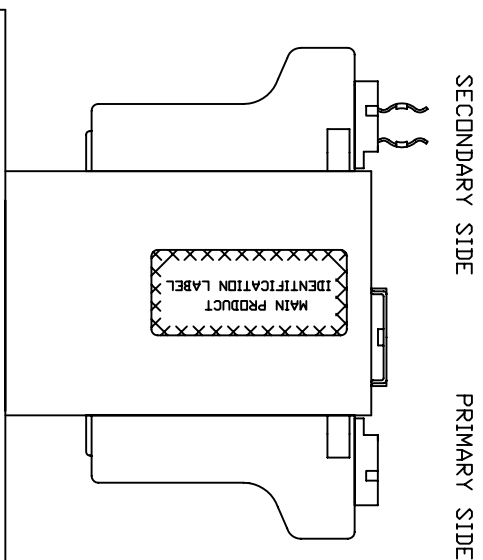



PRIMARY SIDE
PRIMARY IDENTIFICATION LABEL
0.84 TYP. 4 PLACES
0.20 TYP. 4 PLACES

SECONDARY SIDE
SECONDARY IDENTIFICATION LABEL
TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	12.4 LBS

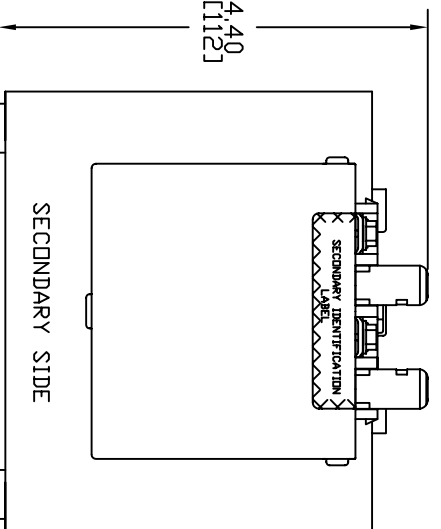

PRIMARY IDENTIFICATION LABEL

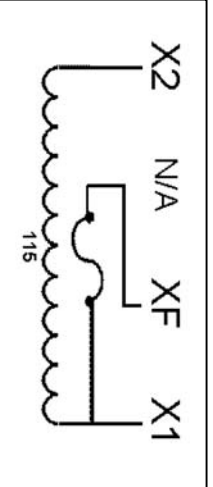


SECONDARY IDENTIFICATION LABEL

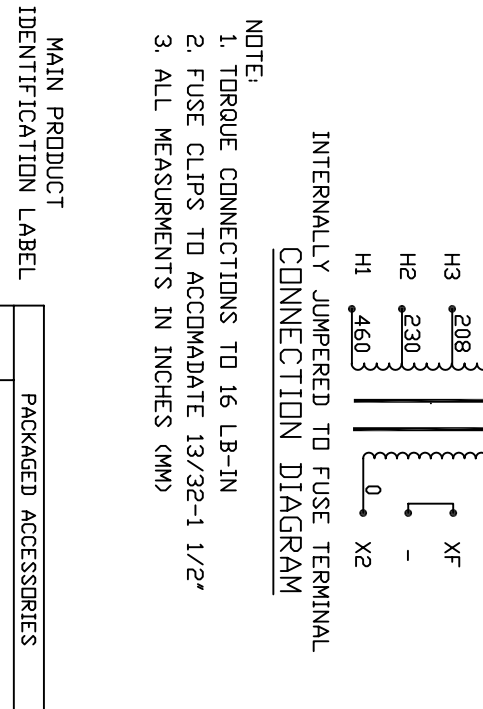

MAIN PRODUCT IDENTIFICATION LABEL

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

INTERNALLY JUMPED TO FUSE TERMINAL CONNECTION DIAGRAM

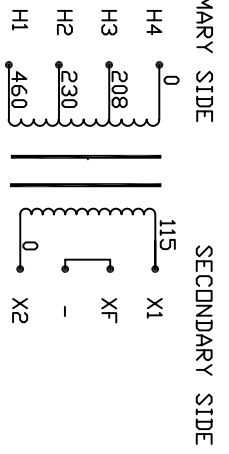

MICRON
TRANSFORMERS
350VA
TEMP CL. 130°C
50/60HZ
U.S. PAT. NO. 3516040
U.S. LISTED 702X

PACKAGED ACCESSORIES	
RELIEF VENT	
WIRE 9-27/07	
INSULATION	
WARRANTY	
APPROVALS	
MICRON PART NO.	B350MBT13XKF