



PRIMARY SIDE

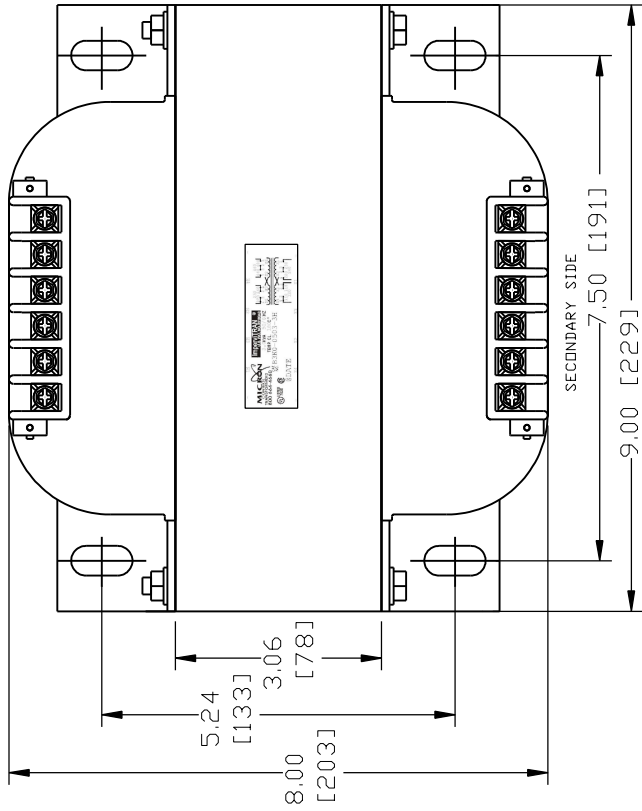

Transformer Specifications

PRIMARY VOLTAGE(S)	230X460 TRIPLE RATED
SECONDARY VOLTAGE(S)	115X230
RATED V.A.	3000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	80.0 LBS

N/A • N/A





N/A • N/A

CONNECTION DIAGRAM

PRIMARY SIDE

SECONDARY SIDE

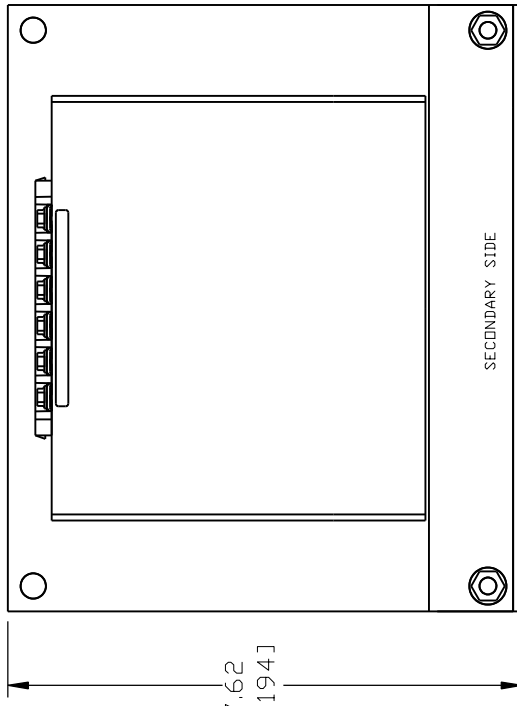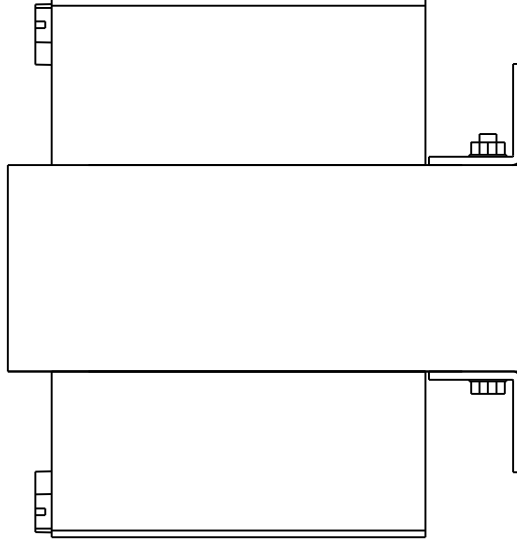

NOTE:

- 1. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

1	2 PAIR OF JUMPERS
-	-
-	-

**MICRON** CONTROL TRANSFORMERS  
 LISTED TO UL 702K  
 IMPERVITRAN  
 U.S. PAT. NO. 3518040  
 3.0KVA 50/60HZ  
 TEMP. CL. 180C  
 CAT. NO. B3K0-0503-3H  
 @DATE

1H 2H 3H 4H  
 230 460  
 230 240 440 480  
 1 2 3 4 1 2 3 4  
 H1 H2 H3 H4  
 X1 X2 X3 X4  
 110, 115 220, 230  
 120 240

**MICRON** CONTROL TRANSFORMERS  
 MICRON INDUSTRIES CORPORATION  
 777 CHURCH ROAD ELMHURST, IL 60126  
 Tel: (800)664-4660, (630)516-1222 Fax: (630)516-1820  
 www.microntransformers.com

DATE	09/18/08	DRAWN	RN	CHECKED	APPROVED
RELEASE DATE		CUSTOMER		PART NO.	
					B3K0-0503-3HA9999A0
					B3K0-0503-3HA777B0
					B3K0-0503-3H

FINAL ASY. B3K0-0503-3HA9999A0  
 SCALE NONE  
 SIZE C  
 DATE 09/18/08  
 BY RN  
 J.V. 5/1/12  
 RN 09/18/08  
 DRAWING UPDATED  
 A FORMAT REVISED  
 ECL REVISIONS