
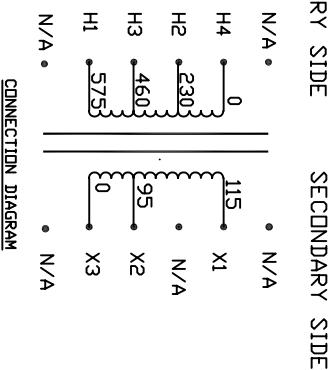
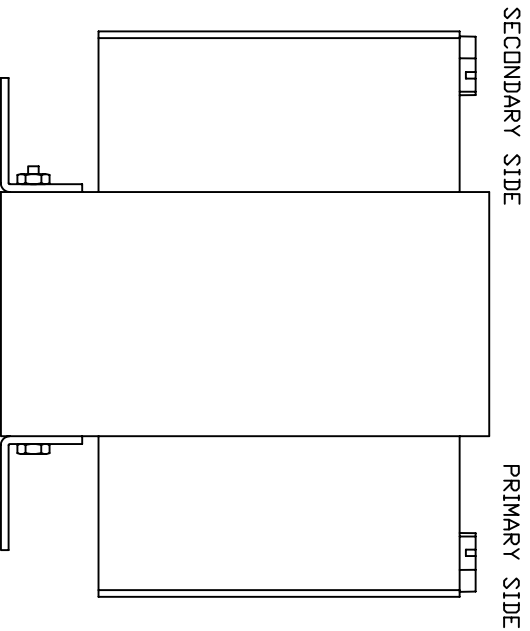
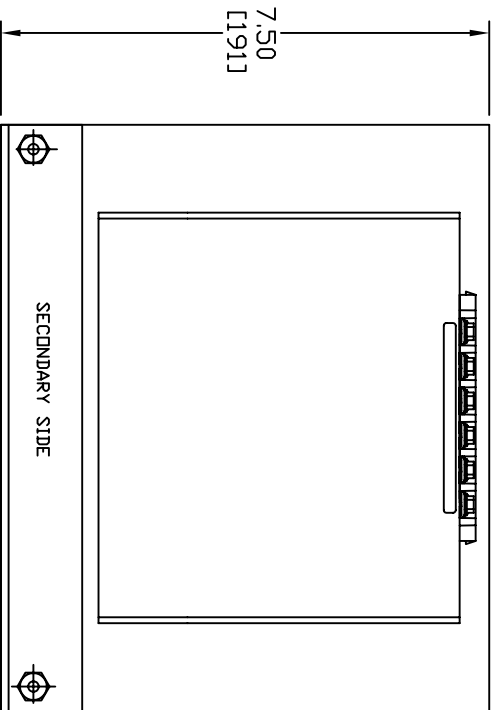


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V/A	3000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	836 LBS

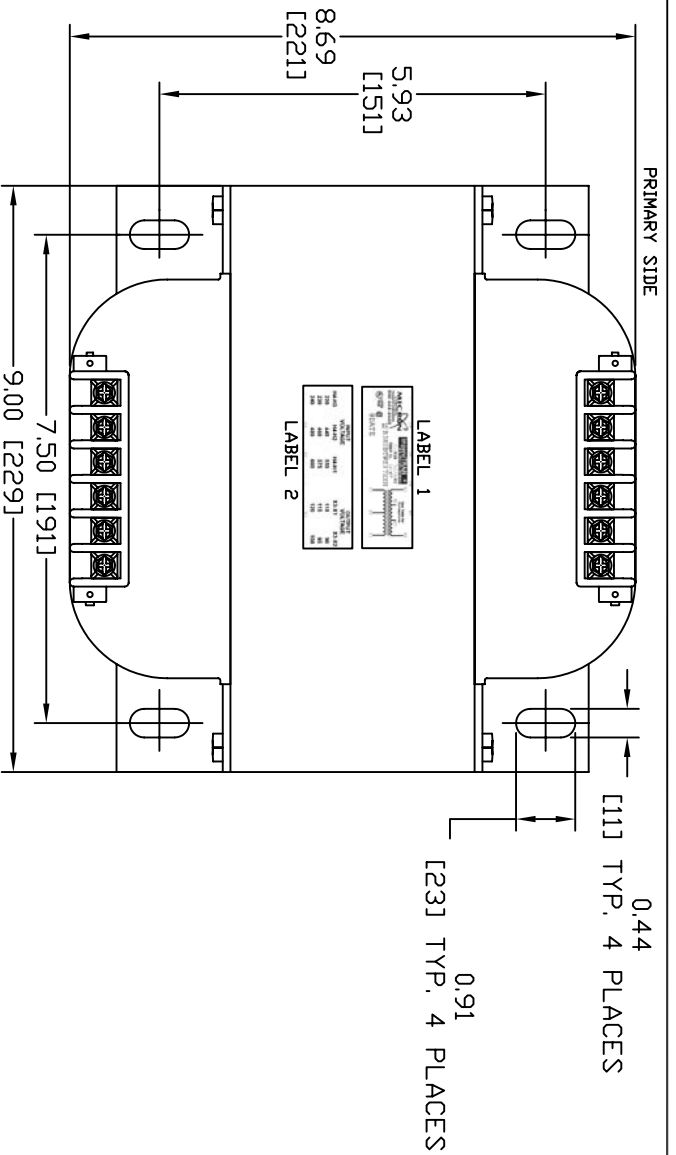

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

QTY	DESCRIPTION	UNIT	REMARKS
1			
-			
-			

MICRON TRANSFORMERS
800 664-4600
30 B3K0BTWZ37XXH
GDATE

ImpervitrAN
3.1KVA 50/60HZ
TEMP CL. 180C
30 B3K0BTWZ37XXH

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3 220	H4-H1 550
H4-H2 440	X3-X1 110
H4-H1 480	X3-X2 95
X3-X2 600	X1 100

MICRON INDUSTRIES CORPORATION
177 CLARK ROAD - ELIZABETH, NJ 07208
TEL: (908)241-1100 FAX: (908)241-1888
WWW.MICRONTRANSFORMERS.COM

DATE: 11/12/07
RELEASE DATE: 11/12/07
MFG. NO.:
C NONE

SCALE: NONE
PART NO.: B3K0BTWZ37XXH