
GlobalTRAN™





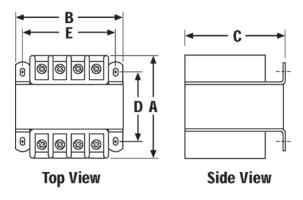

GlobalTRAN is the most reliable and versatile control transformer in the industry today.


- Carries the CE mark
- Epoxy encapsulated coils
- 20-year warranty, double the industry standard
- SafeTouch terminals for additional safety
- Optional integral primary and/or secondary fusing
- 10-32 screw terminals, molded terminal barriers
- Molded-in terminals and philslot screws



If you have any questions or we can be of any assistance in helping you determine your transformer requirements, please call our Technical Support Group at:

1-800-664-4660

www.microntransformers.com

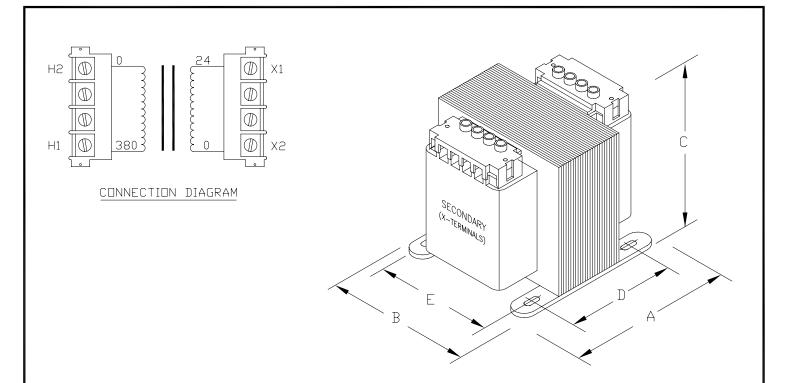

PROVIDED WITH SAFE TOUCH TERMINAL COVERS.

NO INTEGRAL FUSING CAPABILITY.

| | APPROX.WT. | | | | | | | |
|-------------|--------------|--------------|--------------|--------------|--------------|---------------------------|-------------|--|
| | А | В | С | D | E | MTG, SLOTS | LBS (KG) | |
| INCHES (MM) | 3.62 (92) | 3.75 (95) | 3.50 (89) | 3.00 (76) | 3.13 (79) | 0.203X0.460 (5.1X11.7) | | |



MICRON INDUSTRIES CORPORATION
777 CHURCH RDAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

| D 1 | 150 20 | 054 CAE | CDNST. | CONST. ENCAPSULATED | | | | LISTED |
|-------------|------------|-------------|--------|---------------------|----------------|---------------|-----|--------|
| CAT.NO. B1 | 130-2 | 054-GAF | MODEL | MODEL GLOBALTRAN | | | | |
| | (1) | CERTIFIED | | | | | | |
| DUTPUT AMPS | 6.25 | PRIMARY V | 3 | 80 | TEMP. CLASS | HZ 50/60 | (€ | |
| VA | 150 | SECONDARY V | - | 24 | 130°C | REVISION G | IEC | 61558 |