

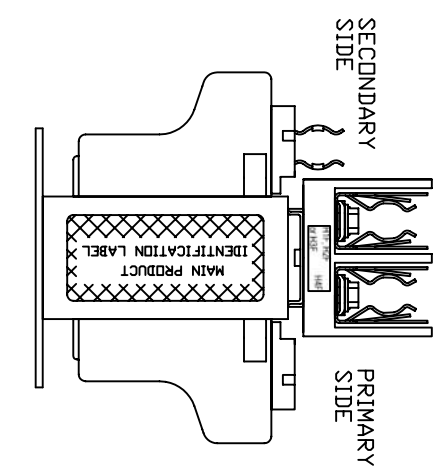


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	2.5 LBS

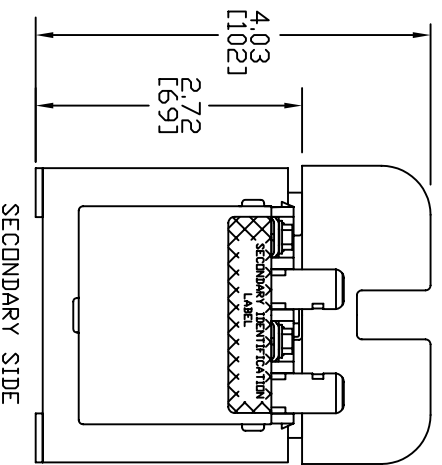


MAIN PRODUCT IDENTIFICATION LABEL

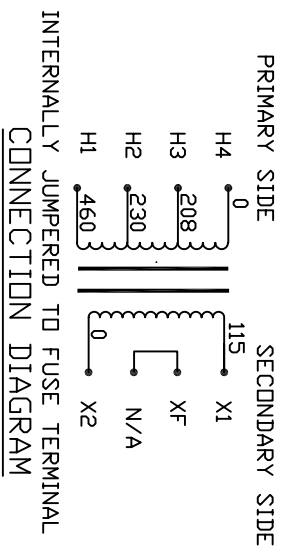

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

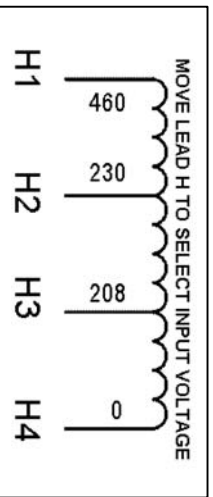

PRIMARY IDENTIFICATION LABEL

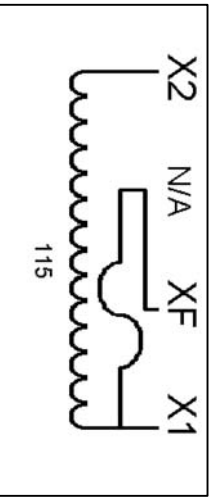

SECONDARY IDENTIFICATION LABEL

MICRON IMPERVITRAN
 U.S. PAT. NO. 3,516,040
 50VA 50/60HZ
 TEMP CL. 105°C

UL LISTED 702X
 CAT. NO. B050MBT13RK
 SERIES 2

00084

PACKAGED ACCESSORIES	
1	-
-	-

MICRON	DATE	12/31/07	ISSUED	BY	J.G.V.	DESIGNED	APPROVED
TRANSFORMER	RELEASE DATE		PART NO.				
MICRON INDUSTRIES CORPORATION TRANSFORMER DIVISION 17400 GARDNER ROAD, SUITE 100 VAN HOUTEN, CALIFORNIA 91761 WWW.MICRONTRANSFORMERS.COM							
SIZE	SCALE	B050MBT13RK					
C	INDEX						