

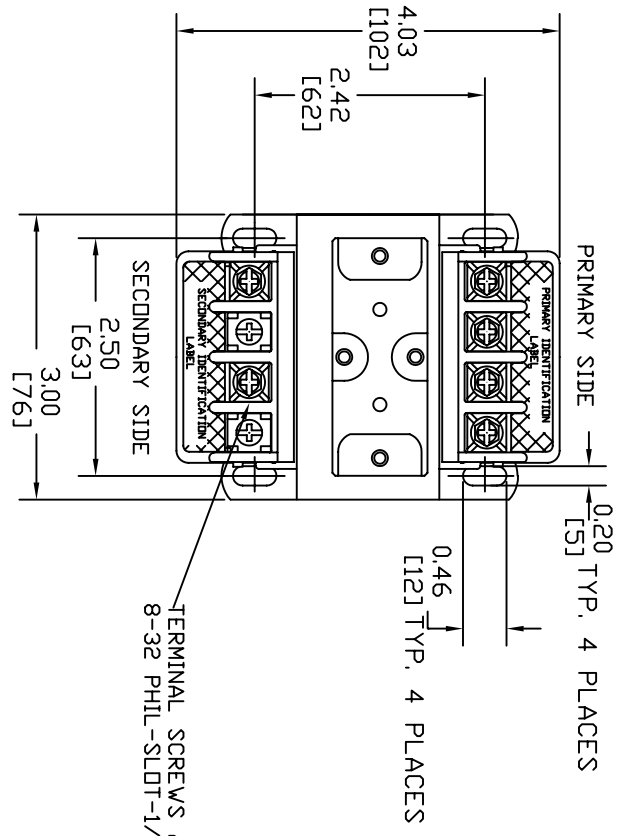
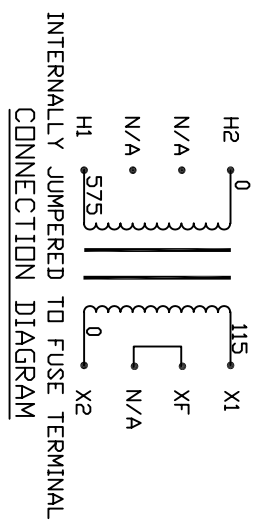


Transformer Specifications	
PRIMARY VOLTAGE(S)	575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.4 LBS

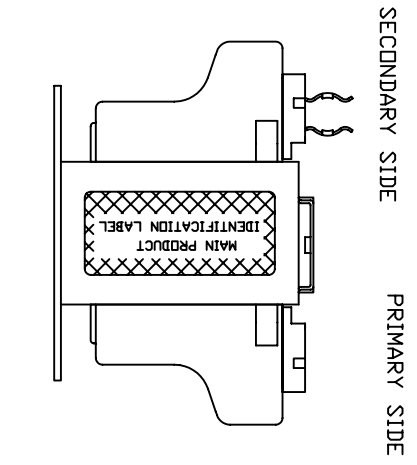

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

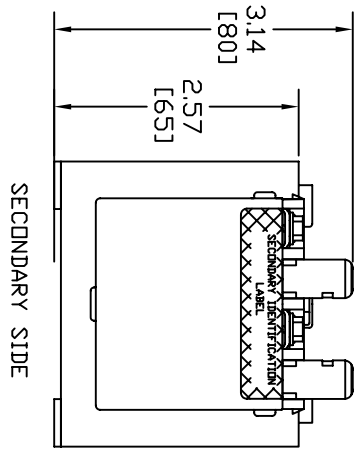


NOTE:
 1. TORQUE CONNECTIONS TO 16 LB-IN.
 2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2".
 3. ALL MEASUREMENTS IN INCHES(MM).

MAIN PRODUCT IDENTIFICATION LABEL

PACKAGED ACCESSORIES

MICRON PART NO.	SCALE	DESCRIPTION
1	-	
	-	
	-	

PRIMARY IDENTIFICATION LABEL

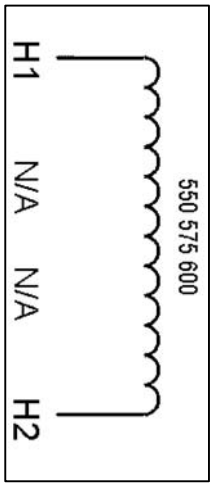

SECONDARY IDENTIFICATION LABEL

