



PRIMARY SIDE

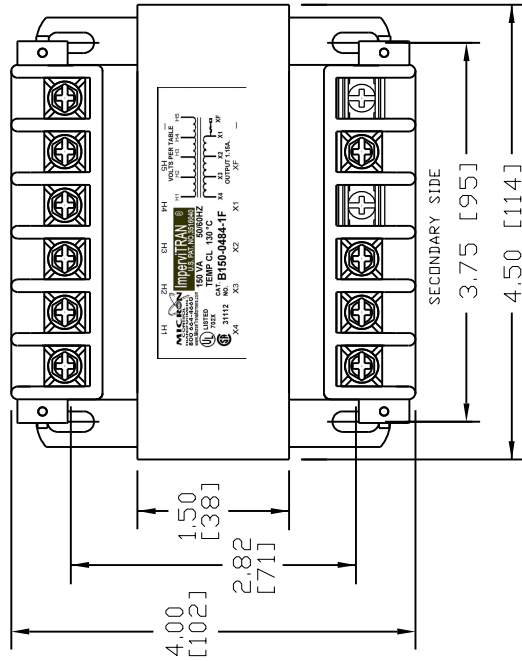

Transformer Specifications




PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	7.9 LBS

TEST REQUIREMENTS

WINDING	H1-H2-H3-H4-H5	X1-X2-X3-X4
D.C. VOLTS	240-416-480-600	108.1-130.9-141.8
LOAD VOLTS	240-416-480-600	99-120-130
F.L. AMPS	0.788/0.315	1.154
HI-POT	3000V	1800V
EXCITING AMPS	0.15AMPS @ 600 VOLTS, 50HZ	
EXCITING WATTS	17.0	

PRIMARY SIDE

SECONDARY SIDE

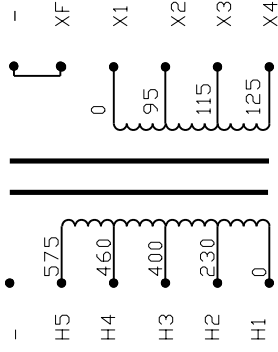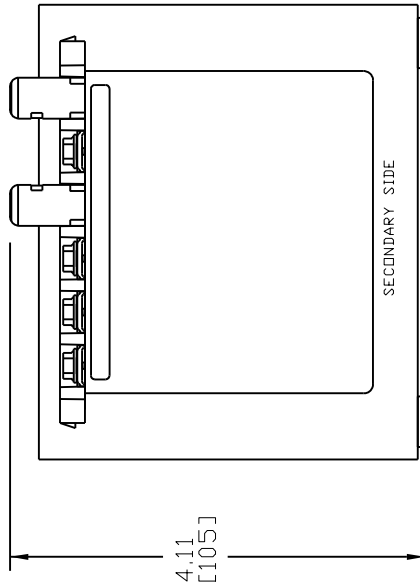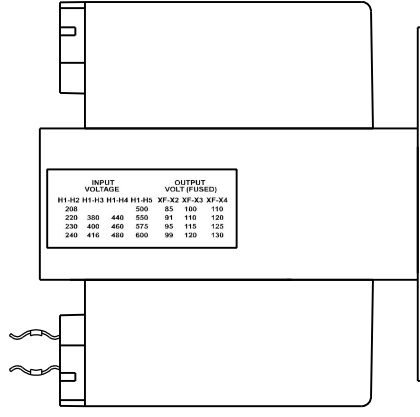

INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

NOTES:

1. TORQUE CONNECTIONS TO 30 LB-IN
2. 10-32 PHILLIP SCREW TRUSS SLOT
3. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"

INPUT VOLTAGE OUTPUT VOLT (FUSED)

INPUT VOLTAGE	H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
208	208	380	440	500	85	100	110
220	380	400	460	550	91	110	120
230	400	416	480	600	95	115	125
240	416	460	575	600	99	120	130

MICRON Impervitran
 U.S. PAT. NO. 3,516,040
 150 VA 50/60HZ
 TEMP CL 130 °C
 CAT. NO. **B150-0484-1F**
 NO. 31112

702X LISTED

VOLTS PER TABLE

H1	H2	H3	H4	H5
X1	X2	X3	X4	XF

OUTPUT 1.15A.

PACKAGED ACCESSORIES

1	
-	
-	

MICRON
 TRANSFORMER DIVISION
 MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD, EAST ELMHURST, ILL. 60126
 TEL. (630) 651-1000 WWW.MICRONTRANSFORMERS.COM

DATE	1/21/08	DRAWN	J.G.V	CHECKED	APPROVED
RELEASE DATE		CUSTOMER			
MICRON PART NO.	B150-0484-1F	J77777A0			
SCALE					
SIZE	C	NOTE			
BY	JJV	DATE	1/21/08		
REVISIONS					
ECL					

B150-0484-1F
 B150-0484-1FJ7777A0
 B150-0484-1FJ7777B0
 B150-0484-1F