

0.20 [5] TYP, 4 PLACES

0.46 [12] TYP, 4 PLACES




CONNECTION TABLE LABEL

INPUT VOLTAGE	H4-H3	H4-H2	H4-H1	OUTPUT VOLTAGE	XF-X2	XF-X1
208	240	480	25	120	115	110
200	230	460	24	115	110	110
	220	440	23	110	110	110

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF.



Transformer Specifications

PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED VA.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	8.5 LBS

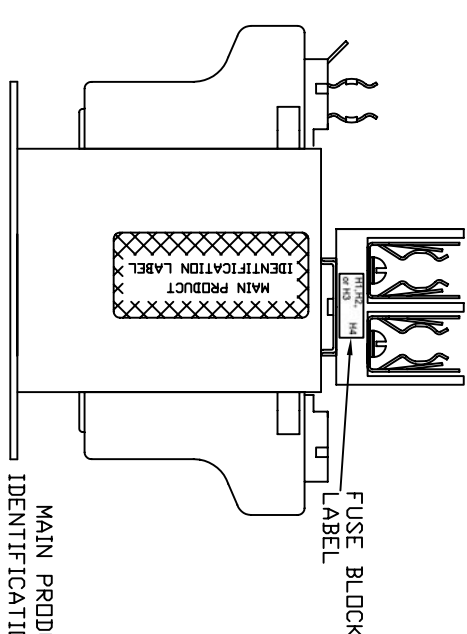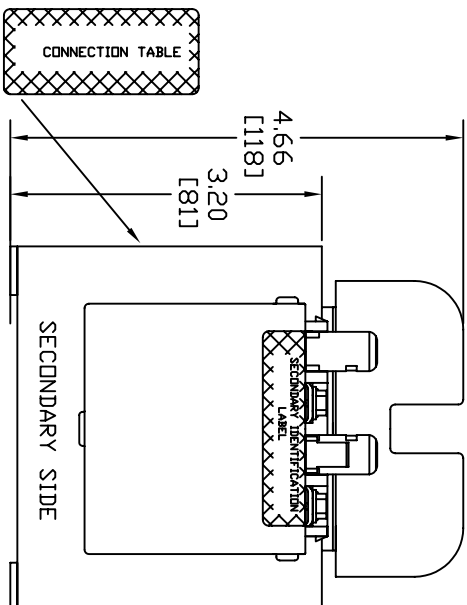

NOTE:

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
3. ALL MEASUREMENTS IN INCHES (MM)

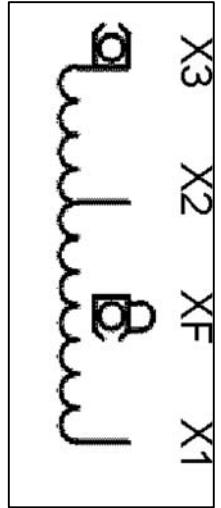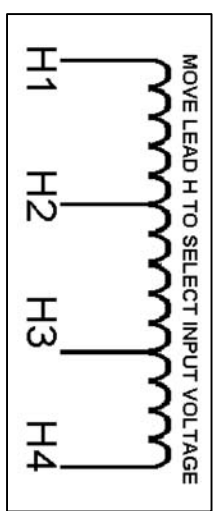

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

**micron** IMPERVITRAN  
 U.S. PAT. NO. 3,516,040  
 150VA 50/60HZ  
 TEMP. CL. 130°C

UL US CAT. B150-2003-8F  
 NO. SERIES 2  
 LISTED 702X 15083

DESCRIPTION	QUANTITY	REVISION
PACKAGED ACCESSORIES	1	
	-	
	-	

DATE: 10/15/07  
 DRAWN: JGV  
 CHECKED: [ ]  
 APPROVED: [ ]

micron INDUSTRIES CORPORATION  
 1400 GORDON STREET, SUITE 130  
 GEORGIA, GA 30145-1100  
 WWW.MICRONTRANSFORMERS.COM

SCALE: NONE  
 SIZE: C  
 PART NO: B150-2003-8F