

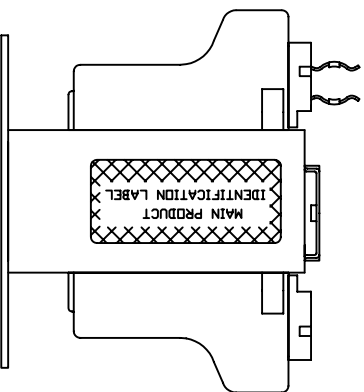


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

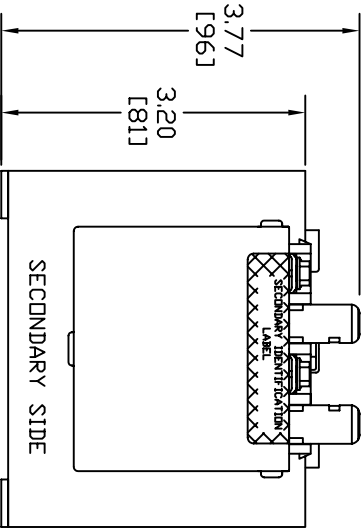

SECONDARY SIDE PRIMARY SIDE


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.6 LBS

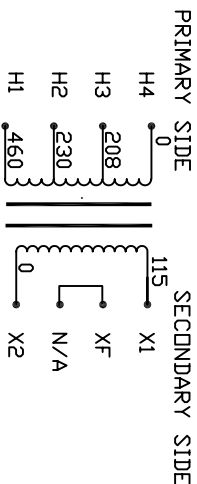


INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. 8-32 PHILLIP SCREW TRUSS SLOT
 3. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 4. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

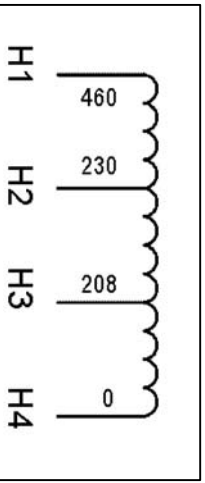

SECONDARY IDENTIFICATION LABEL

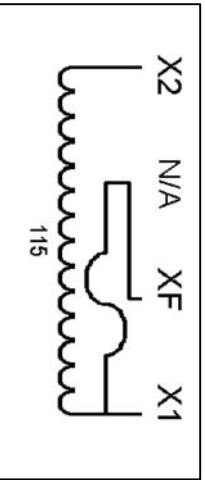

MAIN PRODUCT IDENTIFICATION LABEL

MICRON **Impervitran**
 TRANSFORMERS
 800 664-4000
 www.microntransformers.com
 150VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B150MBT13XKF
 SERIES 2
 03083

UL US LISTED 702X

PACKAGED ACCESSORIES

DATE	9/18/07	DESIGNED BY	JGV	CHECKED		APPROVED
SCALE		DATE				
NAME						

MICRON **INDUSTRIES CORPORATION**
 14, 08000
 www.microntransformers.com

TRANSFORMER MODEL: B150MBT13XKF