




Transformer Specifications	
PRIMARY VOLTAGE(S)	240/347/380
SECONDARY VOLTAGE(S)	120X240
RATED V.A.	1000
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	

TEST REQUIREMENTS			
WINDING	H4-H3-H2-H1	X4-X3	X2-X1
D.C. VOLTS	2397-346.8-380	123.7	123.7
LOAD VOLTS	240-347-380	120	120
F.L. AMPS	4.578/3.891	4.167	4.167
HI-POT	4800V		3000V
EXCITING AMPS	0.50AMPS @ 380V, 50HZ		
EXCITING WATTS	34.5 MAX		

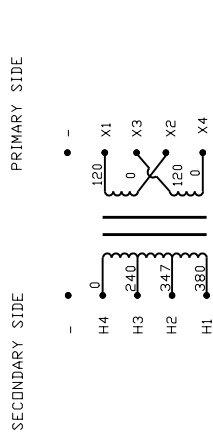

CONNECTION DIAGRAM

NOTE:
 1. TORQUE CONNECTIONS TO 16 LB-IN
 2. ALL MEASUREMENTS IN INCHES (MM)

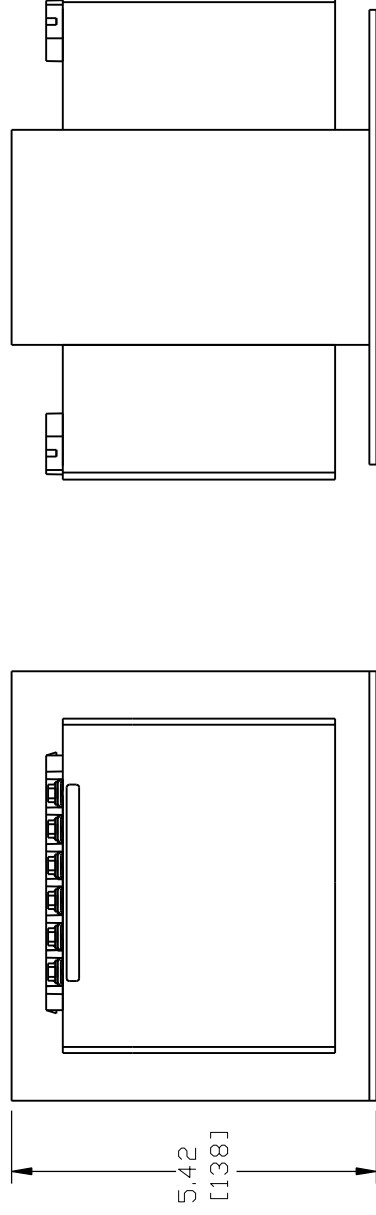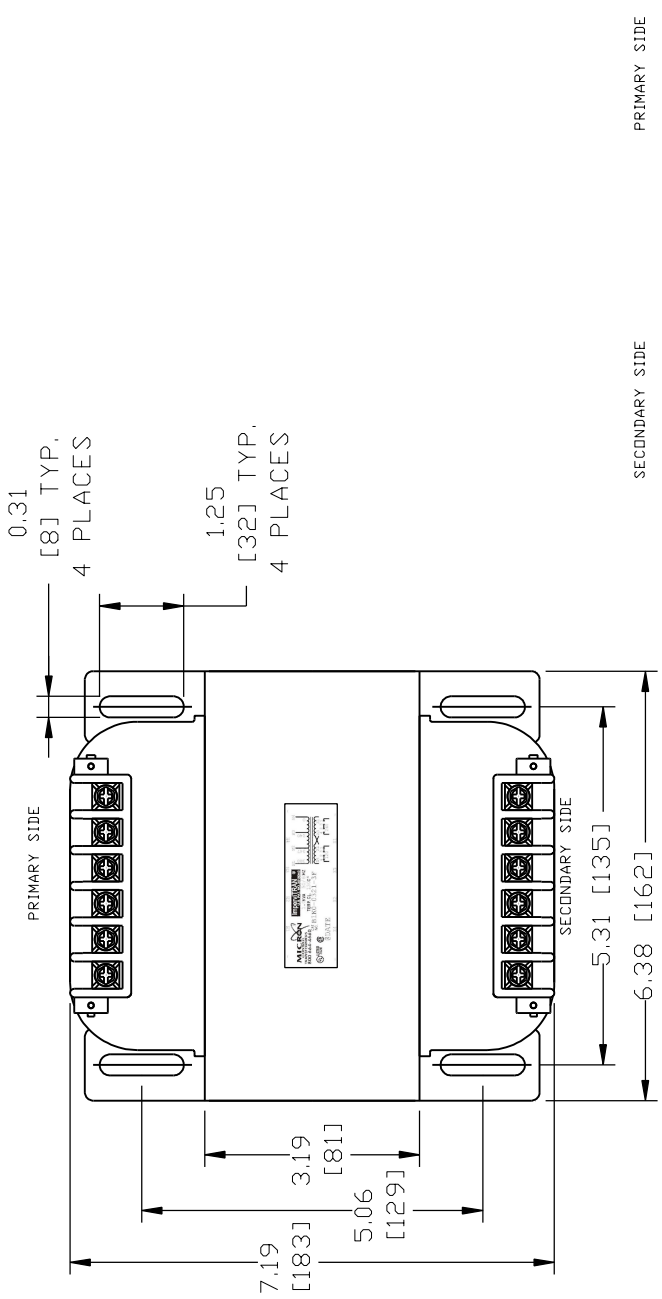

PACKAGED ACCESSORIES	
1	1 PAIR OF J2 JUMPERS
-	-
-	-

MICRON
 CONTROL TRANSFORMERS
 800 664-4660
 LISTED 702K

ImpervitrAN
 U.S. PAT. NO. 3516040
 1.0KVA 50/60HZ
 TEMP. CL. 130C°

DATE 08/20/08
 RELEASE DATE
 DRAWN RN
 CHECKED
 CUSTOMER PART NO.
 FINAL ASST.
 SCALE
 SIZE
 C NONE

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD
 ELMHURST, IL 60126
 Tel: (630)516-1222 Fax: (630)516-1820
 www.microntransformers.com

DATE 08/20/08
 BY RN
 REVISIONS
 A FORMAT REVISED
 ECL

FINAL ASST. BIK0-0321-3FA999A0
 SCALE NONE
 SIZE C
 PART NO. BIK0-0321-3FA777B0

DATE 08/20/08
 BY RN
 REVISIONS
 A FORMAT REVISED
 ECL

BIK0-0321-3F