
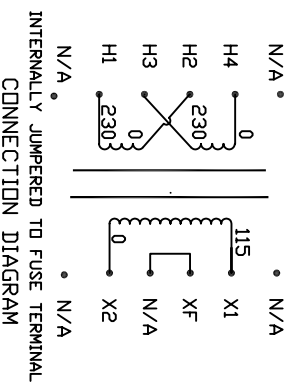
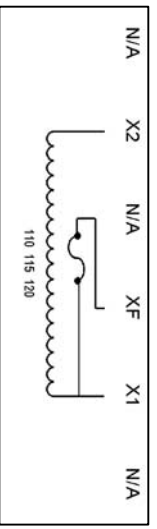
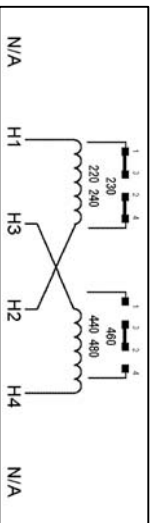
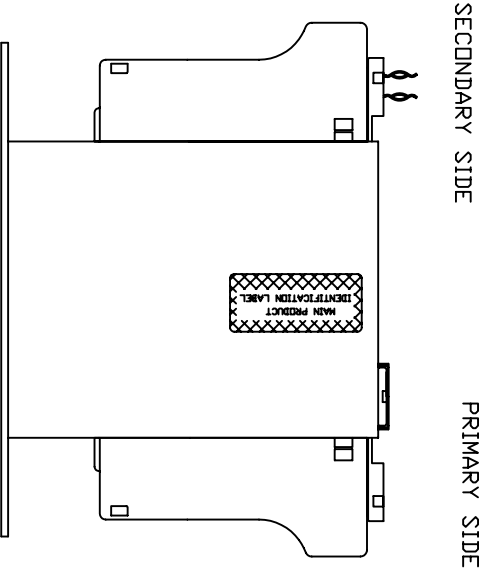
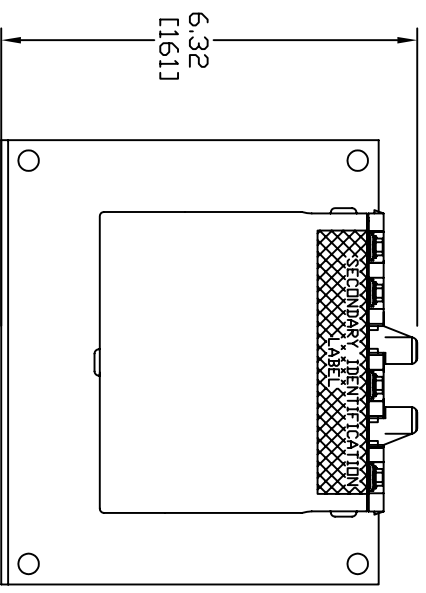


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE)
SECONDARY VOLTAGE(S)	115
RATED V.A.	1500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	50.1 LBS

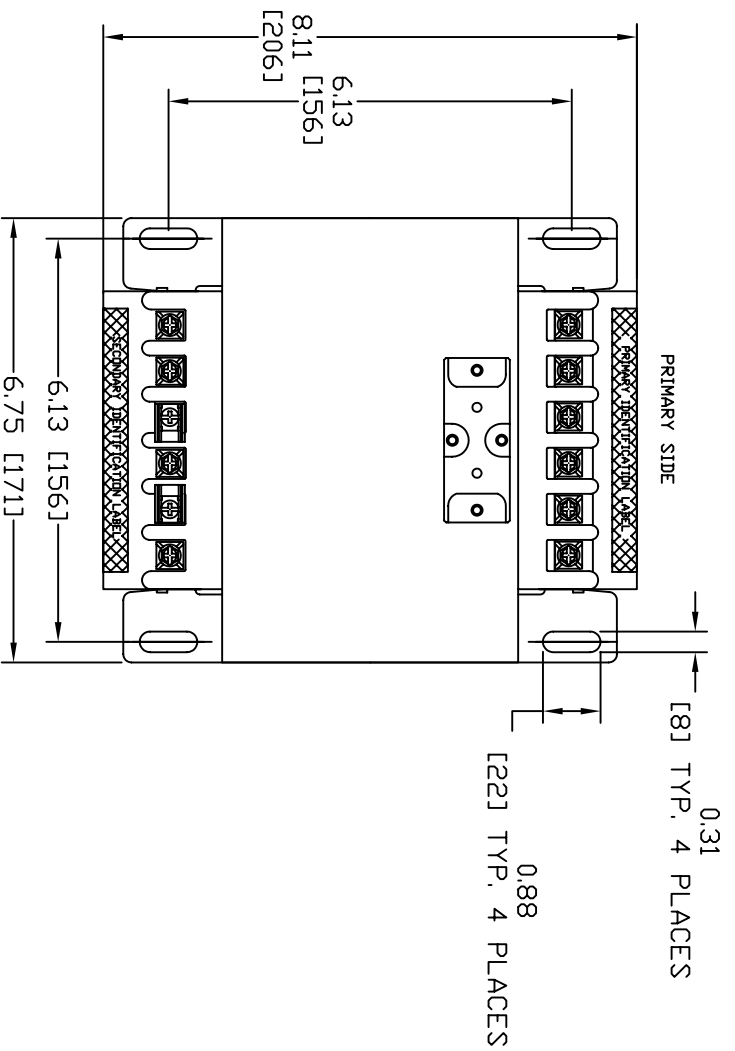

NOTE:
 1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C

UL LISTED 702X
 CAT. NO. B1K5BTZ13JKF
 SERIES 2
 44075

QTY	DESCRIPTION	DATE	BY	REVISION
1	1 PAIR OF JUMPERS	11/7/07	JG.V.	

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C

MICRO PERVITRAN
 TRANSFORMERS
 U.S. PAT. NO. 3516040
 1.5KVA
 50/60HZ
 TEMP CL. 130°C