

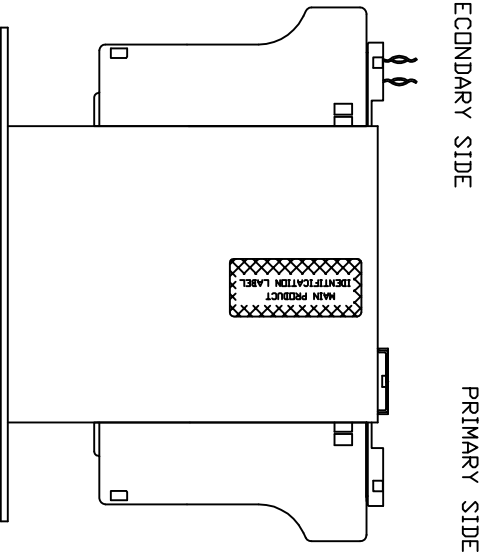
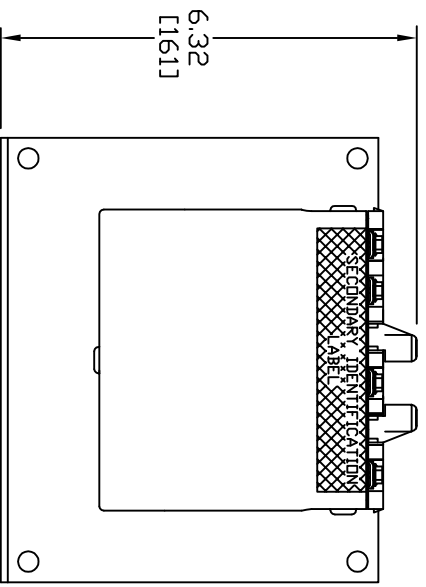
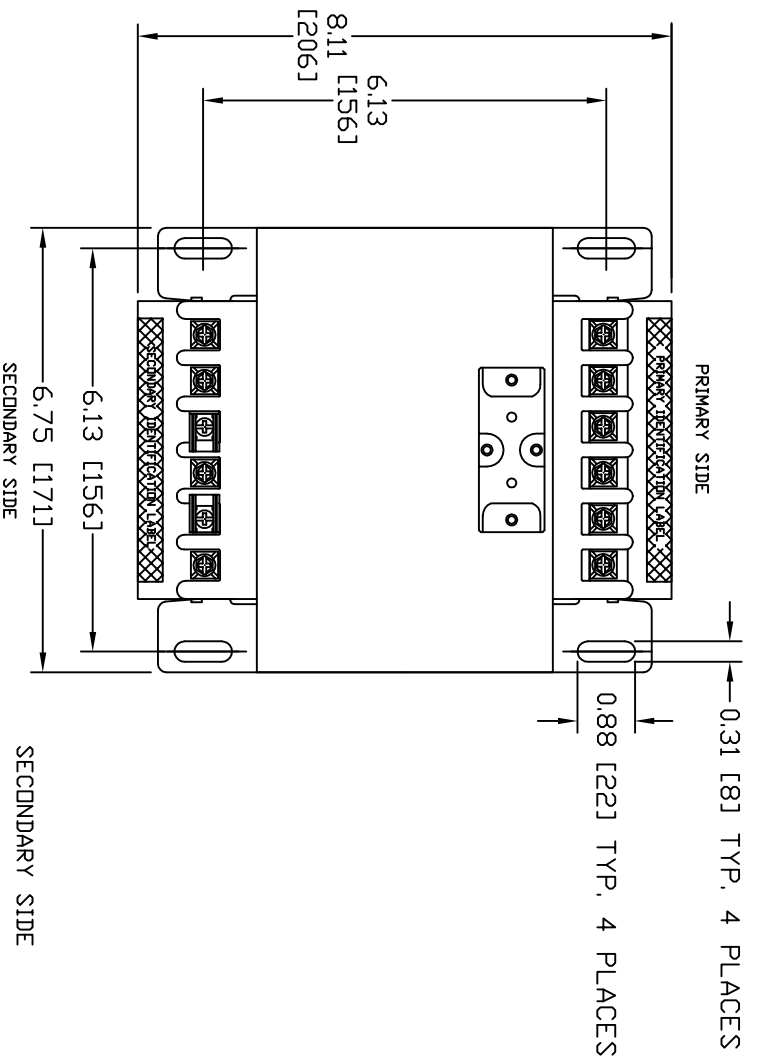
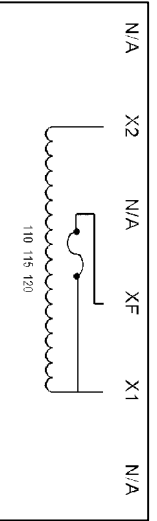


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE)
SECONDARY VOLTAGE(S)	115
RATED V.A.	1500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	501 LBS

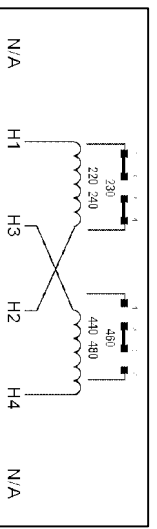

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

INTERNALLY JUMPED TO FUSE TERMINAL CONNECTION DIAGRAM



MICRON ELECTRONICS
 8101 OGDEN RD
 WYOMING, WY 83904
 www.microntransformers.com

Impervitran
 U.S. PAT. NO. 5516040

1.5KVA 50/60HZ
 TEMP CL. 130°C

UL US LISTED 702X

CAT. NO. B1K5BTZ13JKF
 SERIES 2

44075

PACKAGED ACCESSORIES	
1	1 PAIR OF JUMPERS

MICRON PART NO.	DATE	SCALE	REV
	11/27/07	C	1
MICRON INDUSTRIES CORPORATION 14000 WYOMING AVE. SUITE 100 WYOMING, WY 83904			
DESIGNED BY	DATE	DESIGNED BY	DATE
REVISED BY	DATE	REVISED BY	DATE
B1K5BTZ13JKF			

3 REVISED AN03785 RN 06/25/09