


Transformer Specifications	
PRIMARY VDLTAGE(S)	208/230/460
SECONDARY VDLTAGE(S)	115
RATED V.A.	1500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	53.9 LBS

FOR TEST REQUIREMENTS SEE 415-0436
COIL TEST PAGE

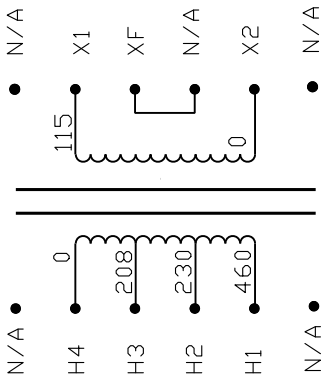


INTERNALLY JUMPED TO FUSE TERMINAL


CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)

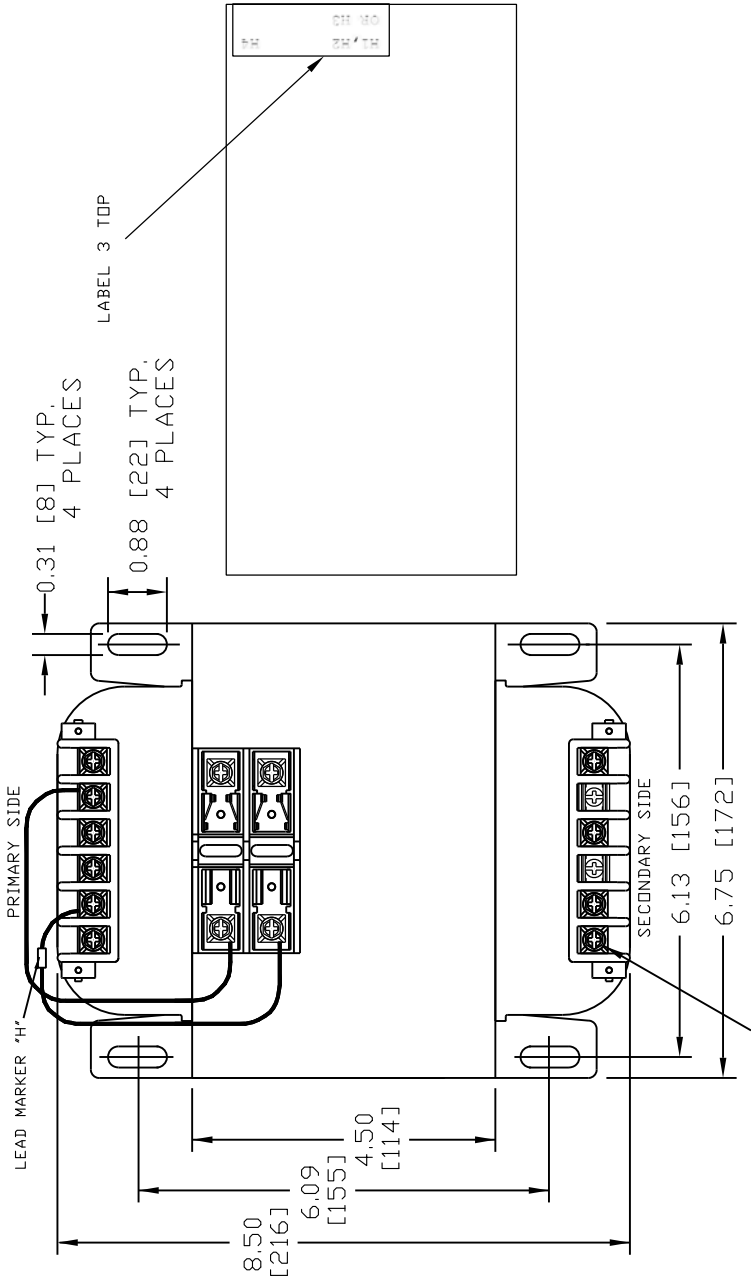

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

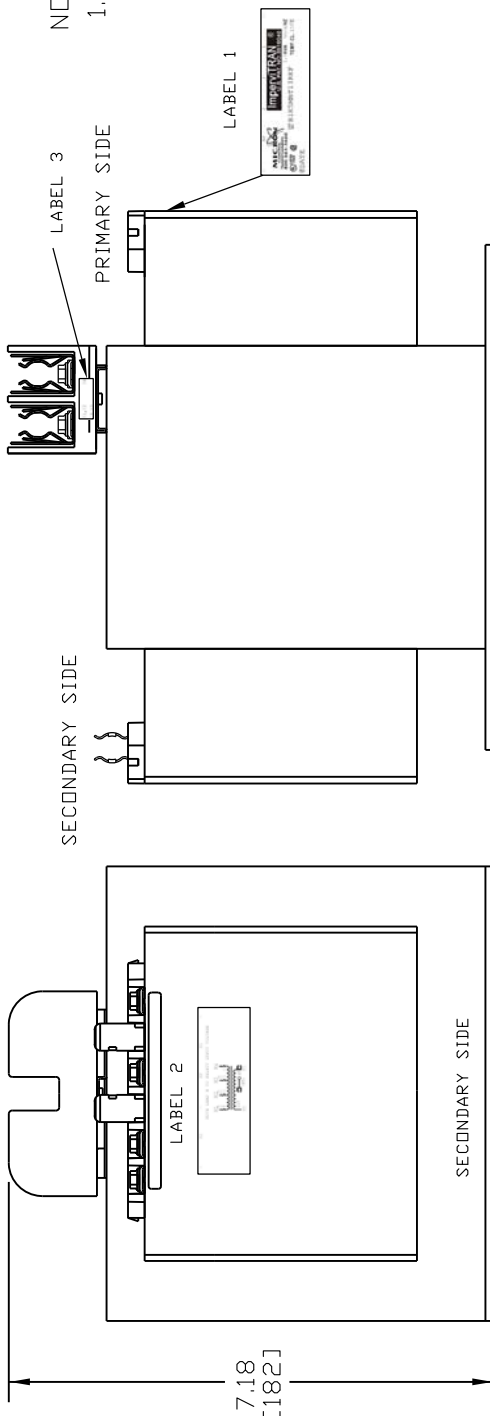


PACKAGED ACCESSORIES

1	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

DATE	10/8/08	DRAWN	J.G.V.	CHECKED	APPROVED
RELEASE DATE		CUSTOMER			
		PART NO.			
		MICRON PART NO.	B1K5MBT13RKF	A7777A0	
		SCALE	C	NONE	
		BY	J.V.	DATE	
		REVISIONS			

DATE	10/8/08	DRAWN	J.G.V.	CHECKED	APPROVED
RELEASE DATE		CUSTOMER			
		PART NO.			
		MICRON PART NO.	B1K5MBT13RKF	A7777A0	
		SCALE	C	NONE	
		BY	J.V.	DATE	
		REVISIONS			

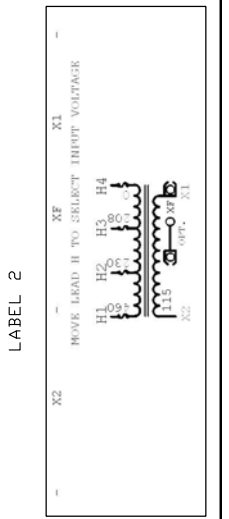

LABEL 1

MICRON INDUSTRIES CORPORATION
800 664-4660
1-5KVA 50/60HZ
TEMP. CL. 130°C

Impervitran
U.S. PAT. NO. 3518040

CAT B1K5MBT13RKF

DATE

MICRON TRANSFORMERS CONTROL

MICRON INDUSTRIES CORPORATION
121 W. 22nd STREET, SUITE 201 DAK. BLDG., ILL.
TEL. (800) 664-4660 (630) 516-1222 FAX (630) 516-1820
WWW.MICRONPOWER.COM