



LEAD MARKER "H"
PRIMARY SIDE

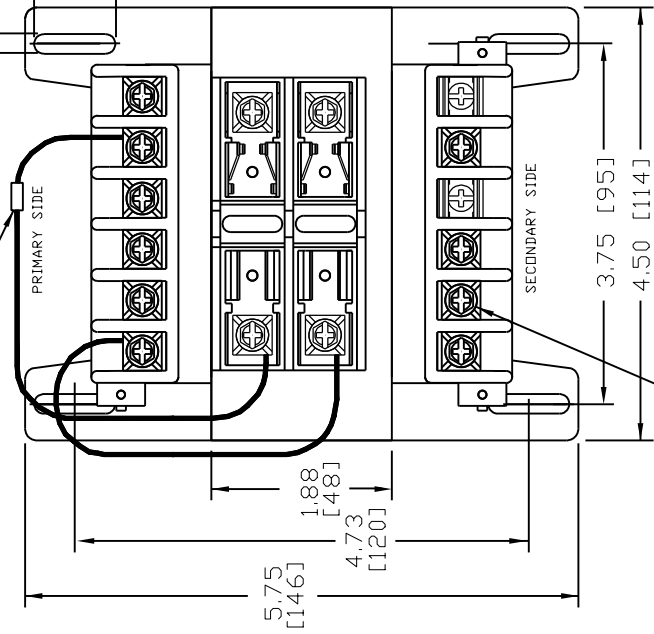

TERMINAL SCREWS ARE COMBINATION
10-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	10.0 LBS

FOR TEST REQUIREMENTS SEE COIL DRAWING

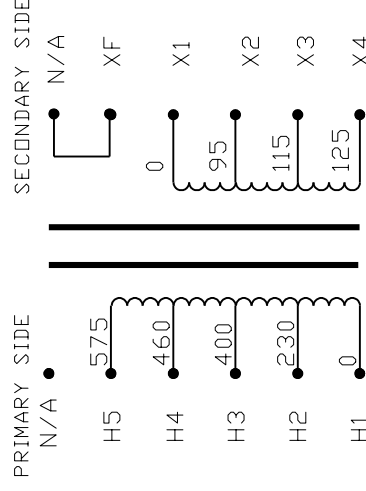

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTES:
1. ALL MEASUREMENTS IN INCHES (MM)

IND. BOX LABEL

250VA
PRIMARY:
 208/600
SECONDARY:
 85/130
FREQUENCY:
 50/60 HZ



QTY. 1

cULus

MADE IN USA

28144

Cat. B250-0485-8F

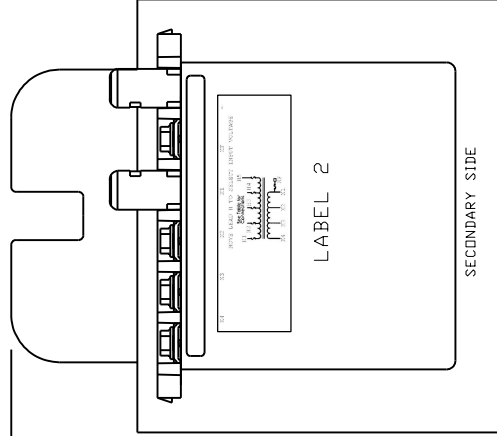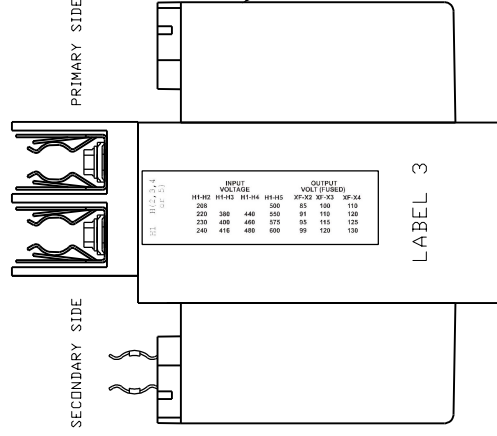

LABEL 3

INPUT VOLTAGE		OUTPUT VOLT (FUSED)				
H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
208	220	380	440	500	85	100
230	240	400	460	550	91	110
240	250	416	480	600	95	115
					99	120
					120	130


PACKAGED ACCESSORIES

DATE	BY	DESCRIPTION
1/21/08	J.V.	DESIGN
		CHECKED
		APPROVED

MICRON INDUSTRIES CORPORATION
 1211 W. 22nd STREET, SUITE 200, DAK BROOK, ILL.
 TEL: 630/564-4660 FAX: 630/564-4661
 WWW.MICRONTRANSFORMERS.COM

RELEASE DATE: 1/21/08

MICRON PART NO. B250-0485-8FA7777A0
 SCALE: C
 BY: J.V. DATE: 8/15/13
 REVISIONS: A REDRAWN BY: J.V. DATE: 1/21/08
 ECL: B250-0485-8F

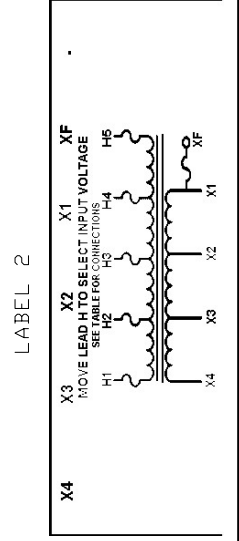

LABEL 1

Impervitran
 U.S. PAT. NO. 3,616,040

250 VA 50/60 HZ
 CAT. NO. B250-0485-8F
 TEMP. CL. 130 °C

SEE DIAGRAM FOR CONNECTIONS

28144