


LEAD MARKER 'H'  
PRIMARY SIDE  
SECONDARY SIDE  
0.20  
[5] TYP. 4 PLACES  
[12] TYP. 4 PLACES

0.46  
[12] TYP. 4 PLACES  
CONNECTION TABLE LABEL


INPUT VOLTAGE	H4-H3	H4-H2	H4-H1	OUTPUT VOLTAGE	XE-X2	XF-X1
240	240	480	25	120	120	
208	230	460	24	115	115	
200	220	440	23	110	110	

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XE

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

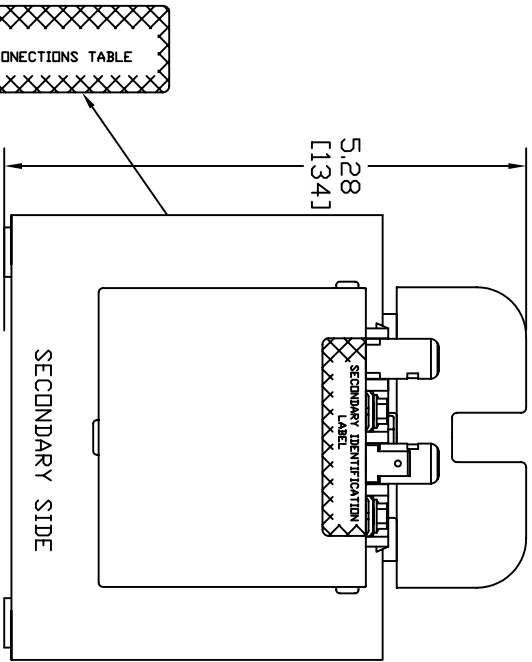

CONNECTIONS TABLE  
SECONDARY IDENTIFICATION LABEL  
PRIMARY IDENTIFICATION LABEL

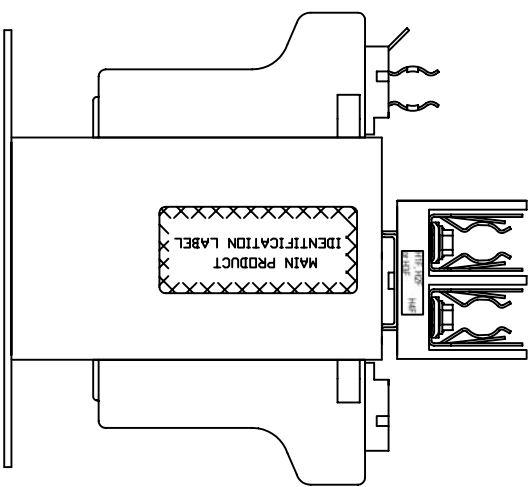


SECONDARY IDENTIFICATION LABEL  
PRIMARY IDENTIFICATION LABEL  
MAIN PRODUCT IDENTIFICATION LABEL

MAIN PRODUCT IDENTIFICATION LABEL



Transformer Specifications

PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.3 LBS

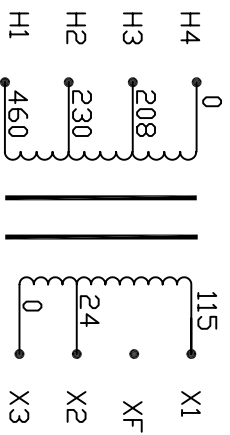

CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

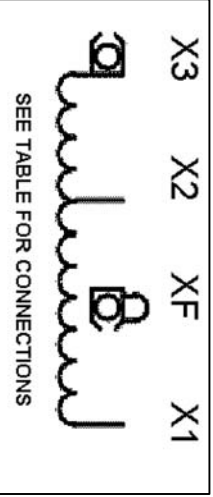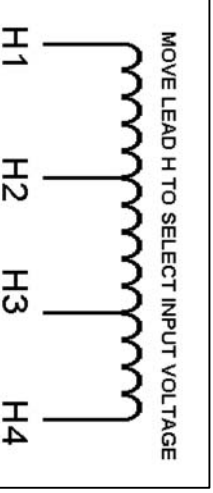

**MICRON**  
CENTRO-TRON  
TRANSFORMERS  
800 664-4660  
www.MicronTransformers.com

**Impervitran**  
U.S. PAT. NO. 3516040

250VA 50/60HZ  
TEMP CL. 130°C

CAT. NO. B250-2005-8F  
SERIES 2

Listed 702X

PACKAGED ACCESSORIES	
DATE	3/18/08
RELEASE DATE	
DESIGNER	JGV
CHECKED	
APPROVED	
MICRON PART NO.	B250-2005-8F
SCALE	C
INDIC	

MICRON INDUSTRIES CORPORATION  
1500 S. WILSON AVENUE  
MESA, AZ 85205  
Tel: (602)544-4660 Fax: (602)544-1880  
www.MicronTransformers.com