

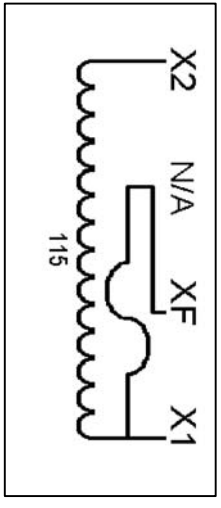
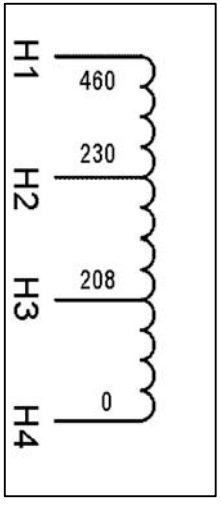
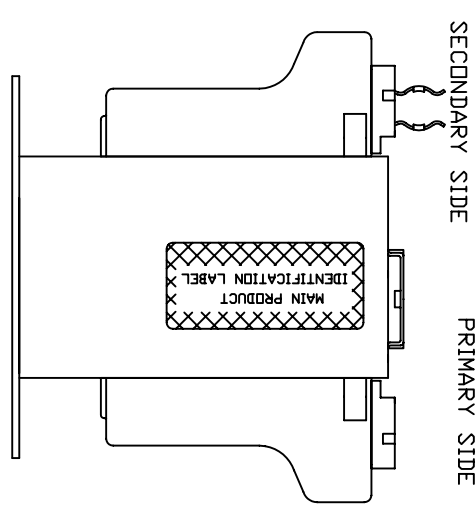
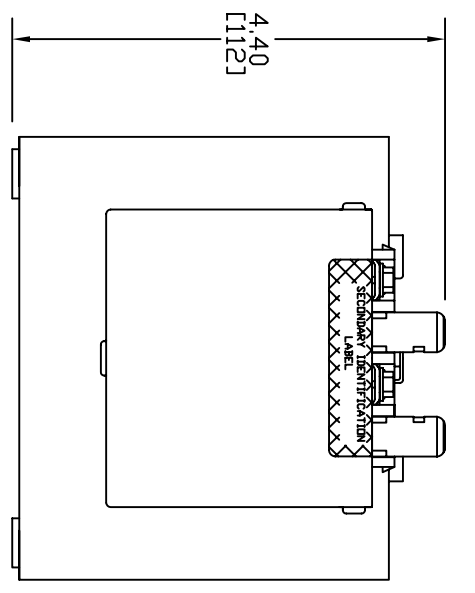


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V/A	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	10.8 LBS

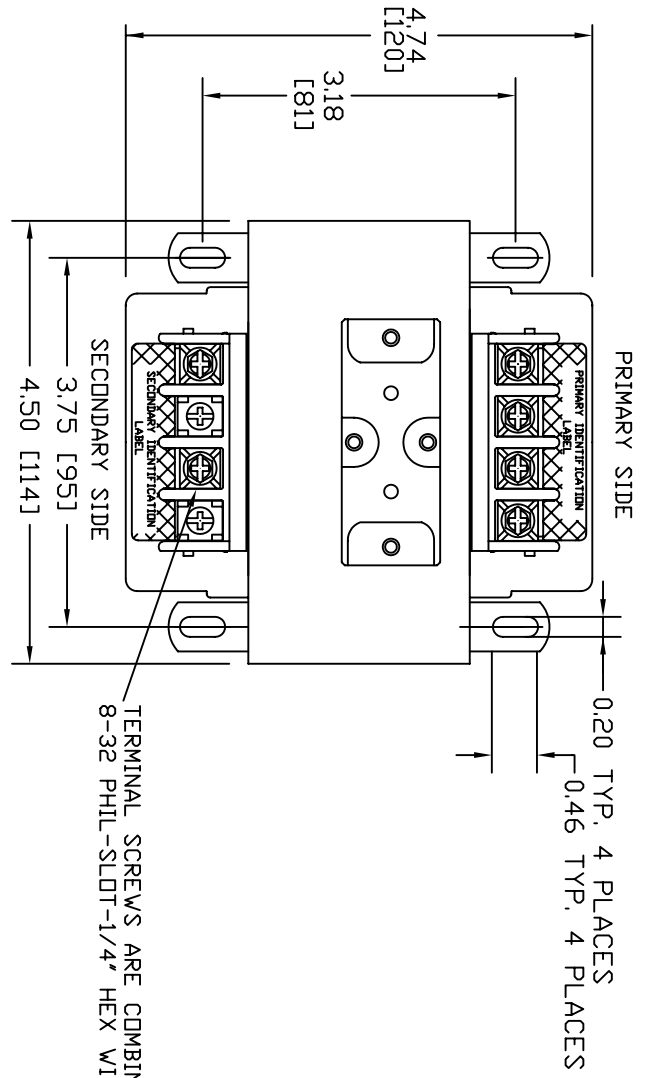

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

INTERNALLY JUMPED TO FUSE TERMINAL CONNECTION DIAGRAM

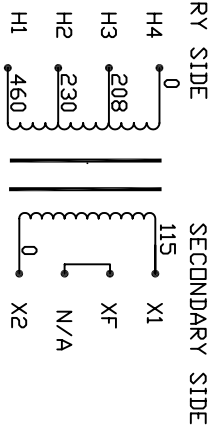

MAIN PRODUCT IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

MICRON IMPERVITRAN
 TRANSFORMER
 U.S. PAT. NO. 3,516,040

250VA 50/60Hz
 TEMP CL. 130°C

CAT. NO. B250MBT13XKF
 SERIES 2

47072

UL US LISTED 702X

TRADE SHOWS
 800.664.4660
 www.microntransformers.com

PACKAGED ACCESSORIES	
DATE	12/21/07
RELEASE DATE	
DESIGNED BY	JGV
CHECKED BY	
APPROVED BY	
MICRON PART NO.	B250MBT13XKF
SCALE	
SIZE	C
INDIC	

MICRON INDUSTRIES CORPORATION
 177 GARDNER ROAD, GARDNER, MASSACHUSETTS 01445
 TEL: 978.271.1000 FAX: 978.271.1055
 www.microntransformers.com