
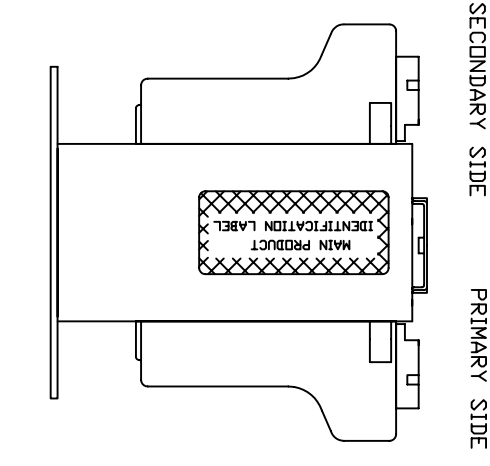


0.20 [5] TYP, 4 PLACES


0.46 [12] TYP, 4 PLACES

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

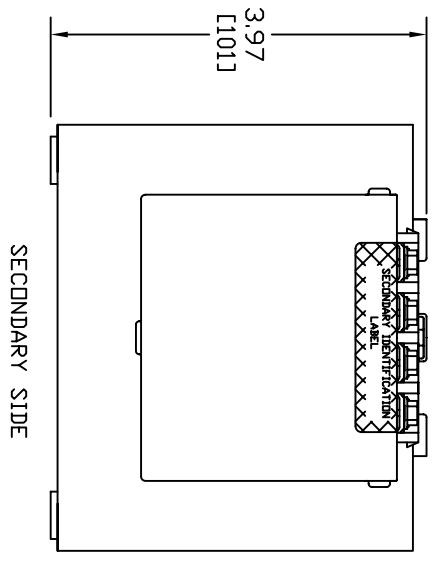


Transformer Specifications	
PRIMARY VOLTAGE(S)	240x480
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.3 LBS


NOTE:
 1. TORQUE CONNECTIONS TO 16 LB-IN
 2. ALL MEASUREMENTS IN INCHES (MM)



PRIMARY IDENTIFICATION LABEL

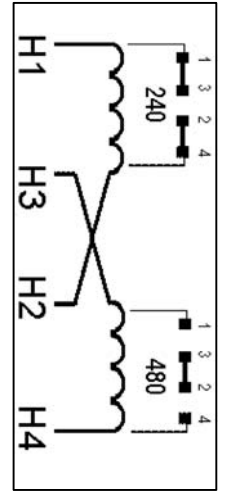

SECONDARY IDENTIFICATION LABEL

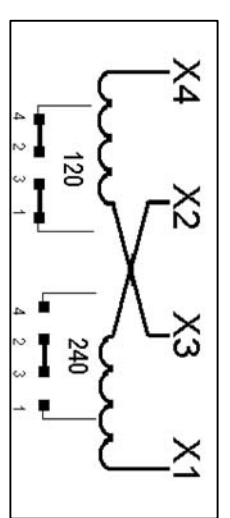

MAIN PRODUCT IDENTIFICATION LABEL

MICRON **Impervitran**
 U.S. PAT. NO. 3516040
 250VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B250PU1519JUF
 SERIES 2
 03084

PACKAGED ACCESSORIES	
1	2 PAIR DF JUMPERS
-	-
-	-

MICRON PART NO.	B250PU1519JUF
DATE	1/4/08
RELEASE DATE	
SCALE	C
HOME	B250PU1519JUF