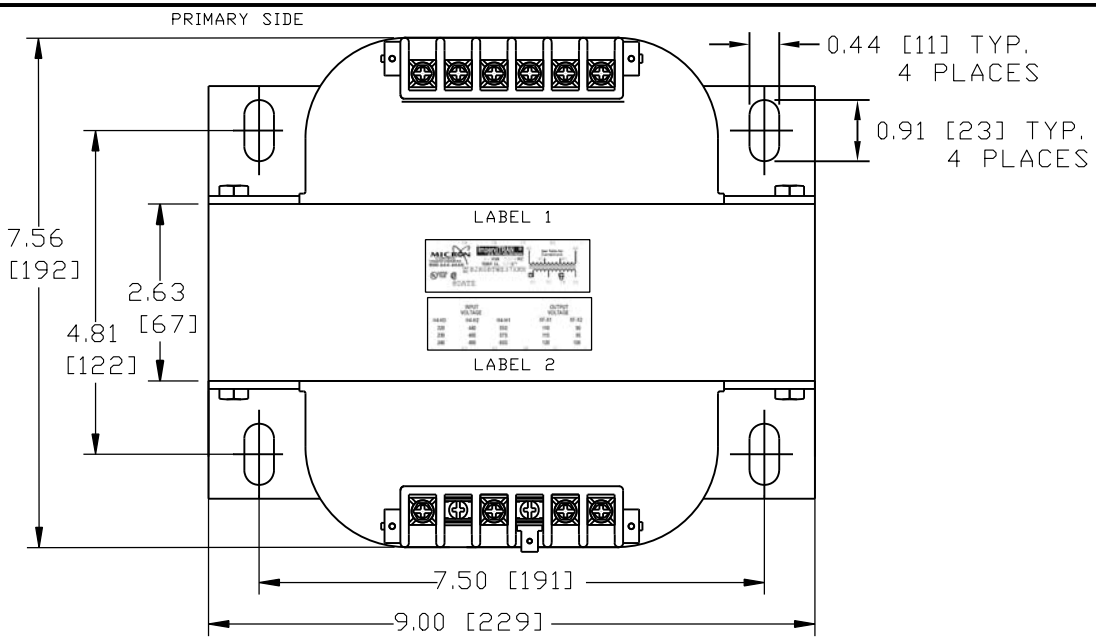

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	2000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	57.7 LBS

FOR TEST REQUIREMENTS SEE COIL 419-0080 TEST PAGE

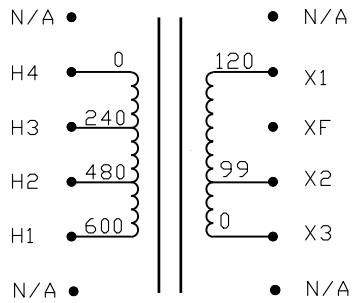

CONNECTION DIAGRAM

NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

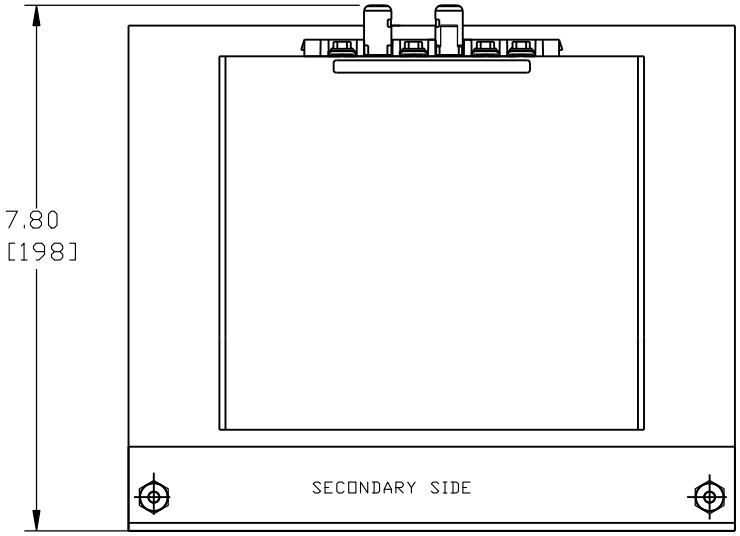

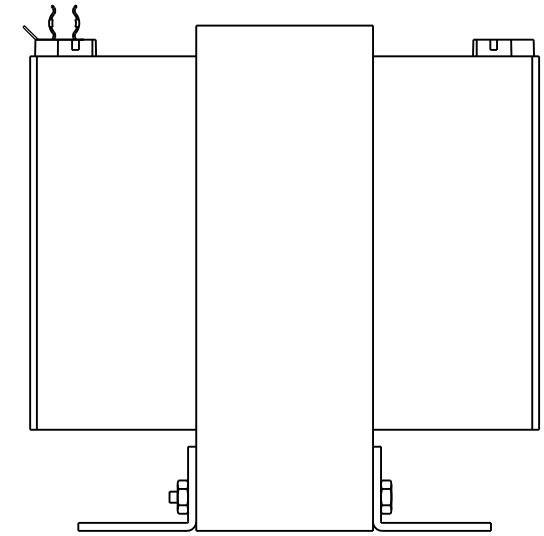

PACKAGED ACCESSORIES	
1	
–	–
–	–

LABEL 1

LABEL 2

	INPUT VOLTAGE			OUTPUT VOLTAGE	
H4-H3	H4-H2	H4-H1		XF-X1	XF-X2
220	440	550		110	90
230	460	575		115	95
240	480	600		120	100
X3	X2	XF		X1	

ECL	REVISIONS	BY	DATE
	MOVE TEST SPECS. TO COIL PRINT AN#5334	PJA	02/26/13
A	NEW	J.V	11/12/07

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
11/12/07	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO. B2K0BTWZ37XKHA9999A0

SIZE C | SCALE NONE | B2K0BTWZ37XKH