
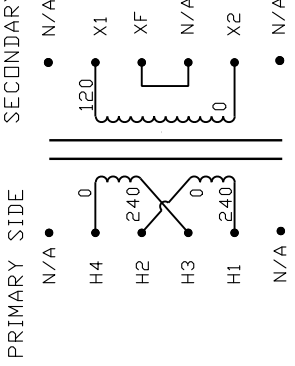
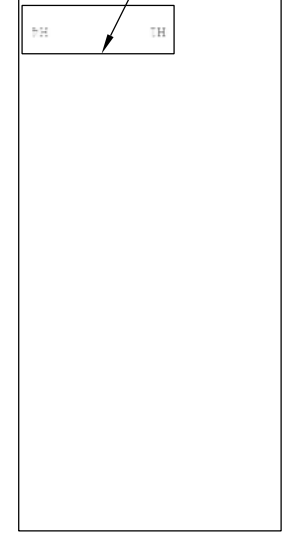
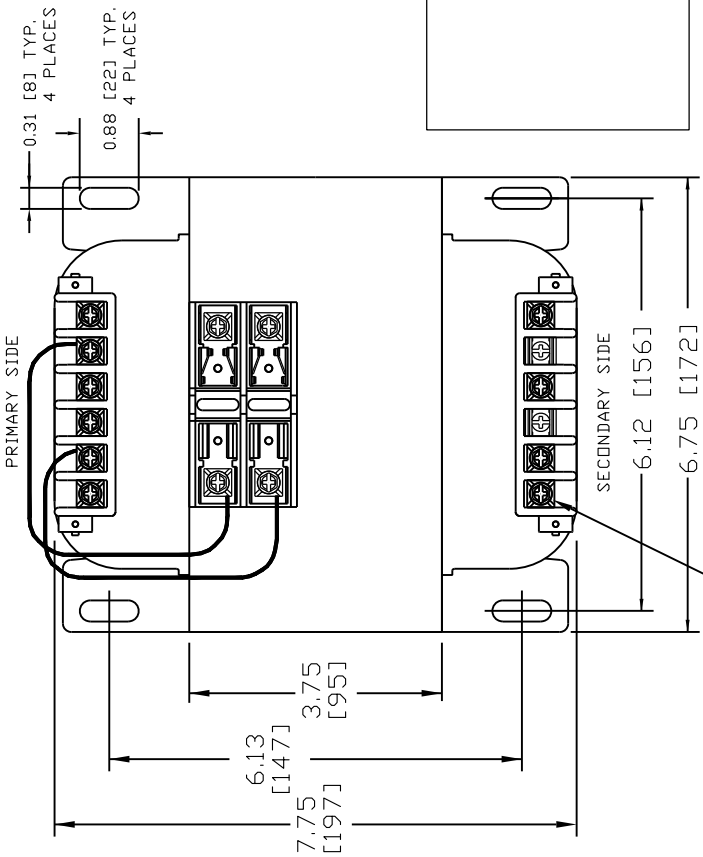


Transformer Specifications


PRIMARY VOLTAGE(S)	240X480 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	120
RATED V.A.	2000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	46.0 LBS

FOR TEST REQUIREMENTS SEE 419-0117
COIL TEST PAGE

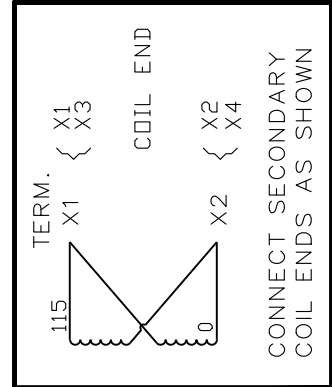

INTERNALLY JUMPED TO FUSE TERMINAL
CONNECTION DIAGRAM


10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

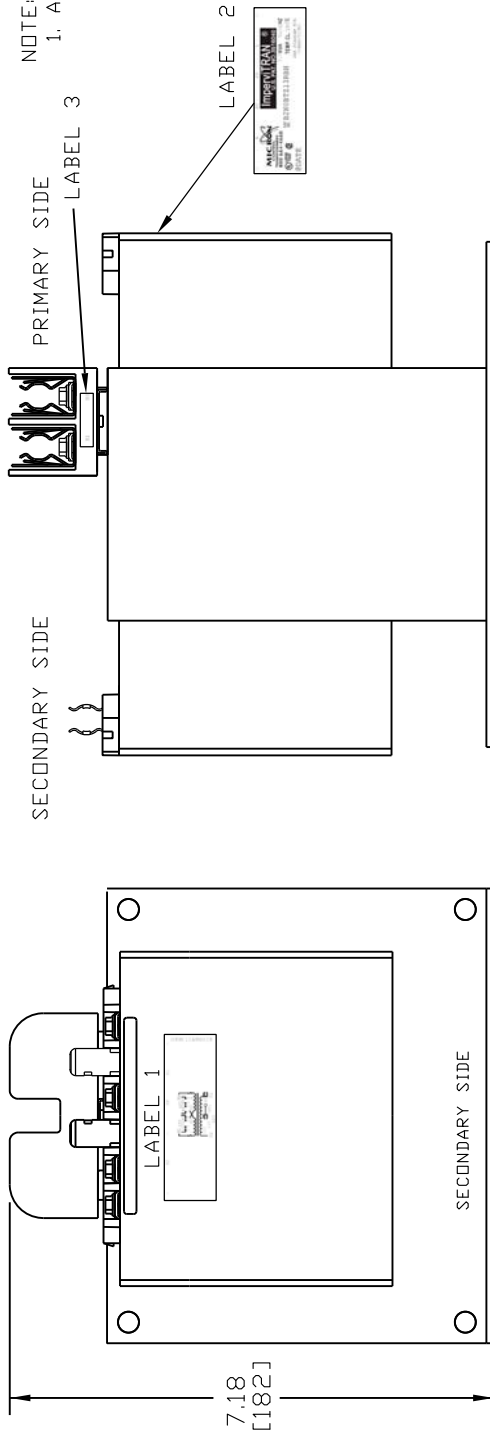

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

LABEL 1

LABEL 2

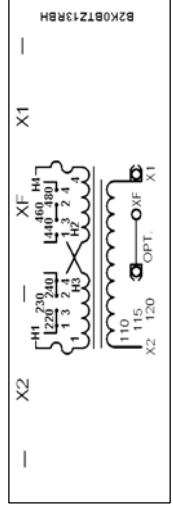

MICRON INDUSTRIES CORPORATION
1211 W. 222ND STREET SUITE 200, DAK BROOK, ILL. 60015
Tel: (800)516-4660, (630)516-5252 Fax: (630)516-1820
www.micron-transformers.com

Impervitran
U.S. PAT. NO. 3616040

2.0 KVA 50/60 HZ
TEMP CL 180 °C

LISTED 702X
UL OPT. OFX
46113

CAT. NO. B2K0BTZ13RBH
PART NO. B2K0BTZ13RBH

PACKAGED ACCESSORIES

1	ONE PAIR OF JUMPERS
-	-
-	-
-	-

DATE	10/2/08	DRAWN	J.G.V.	CHECKED	APPROVED
RELEASE DATE		CUSTOMER PART NO.			
MICRON PART NO.	B2K0BTZ13RBHA7777A0				
SCALE					
SIZE	C				
NAME					

REVISIONS	BY	DATE
A	REDRAWN	10/2/08
J	UPDATED	5/21/13
AN003255		

ECL		
REVISIONS	BY	DATE
A	REDRAWN	10/2/08
J	UPDATED	5/21/13
AN003255		

MICRON INDUSTRIES CORPORATION
1211 W. 222ND STREET SUITE 200, DAK BROOK, ILL. 60015
Tel: (800)516-4660, (630)516-5252 Fax: (630)516-1820
www.micron-transformers.com