



PRIMARY SIDE

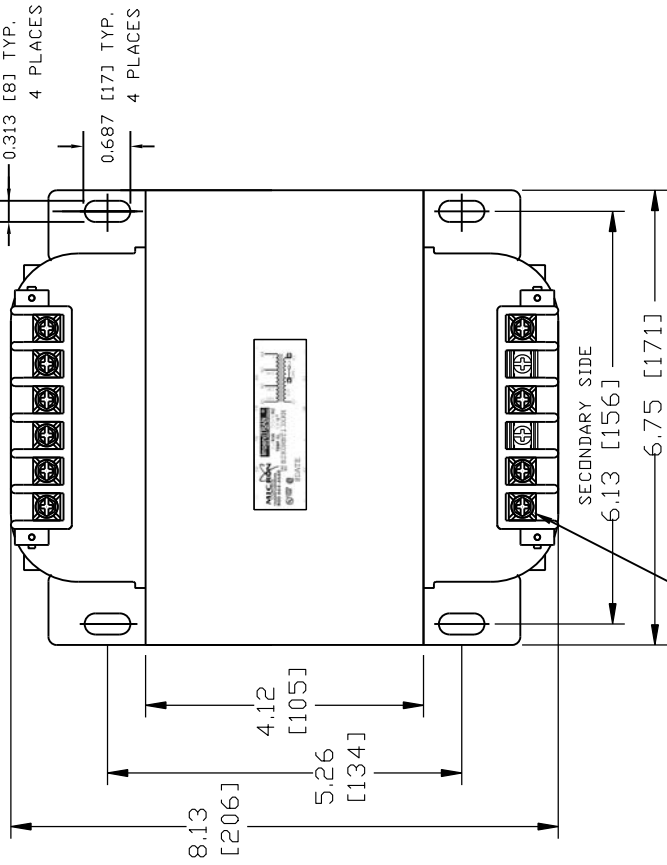


10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

SECONDARY SIDE

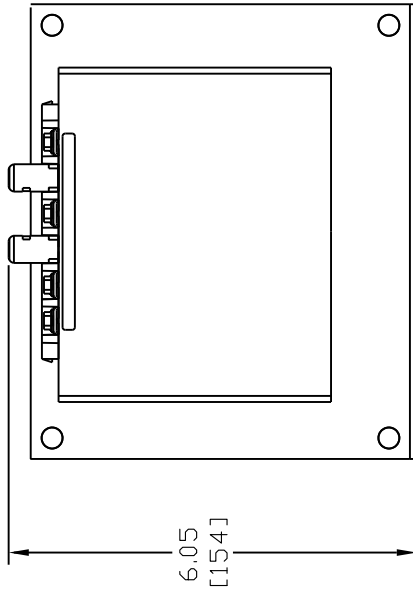

PRIMARY SIDE

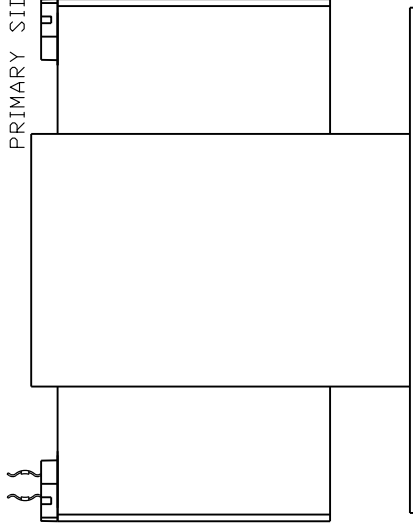

IND. BOX LABEL


**2000 VA**  
**PRIMARY:**  
 208/230/460  
**SECONDARY:**  
 115  
**FREQUENCY:**  
 50/60 HZ  
 MADE IN USA  
**Cat. B2K0MBT13XKH**  
 40141

Transformer Specifications

PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	2000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	51.6 LBS

FOR TEST REQUIREMENTS SEE 419-0070  
COIL TEST PAGE

PRIMARY SIDE



SECONDARY SIDE

INTERNALLY JUMPED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

1					
-	-	-	-	-	-
-	-	-	-	-	-

**MICRON INDUSTRIES CORPORATION**  
 1811 W. 22nd ST. Suite 500, DAK BROOK, ILL.  
 Tel: (800)564-4660 Fax: (630)516-1860  
 www.MicronPower.com

DATE	09/16/08	DRAWN	RN	CHECKED	APPROVED
RELEASE DATE		CUST. P/N			
MICRON P/N	B2K0MBT13XKHA9999A0				
SCALE	C	NONE			
SIZE	C	NONE			
					B2K0MBT13XKH

**2.0 KVA 50/60 HZ**  
**TEMP CL 180 °C**  
**CAT. NO. B2K0MBT13XKH**  
**40141**

		J.V	8/19/13		
A	FORMAT REVISED	RN	09/16/08		
ECL	REVISIONS	BY	DATE		