


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	2000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	57.7 LBS

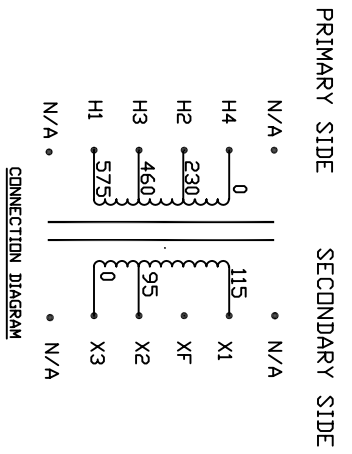

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

LABEL 1

LABEL 2

MICRON TRANSFORMERS
 800 664-4600 FAX NO. B2K0BTWZ37XKH
 100% UL LISTED
 @DATE

Imperitrans
 2.7kVA 50/60HZ
 TEMP. CL. 180C°

See Table for connection H1 H2 H3 H4
 X1 X2 X3 XF

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3 220	H4-H1 550
H4-H2 440	XF-X1 110
H4-H1 480	XF-X2 95
	X1 100

MICRON INDUSTRIES CORPORATION
 100% UL LISTED
 800 664-4600 FAX NO. B2K0BTWZ37XKH
 100% UL LISTED
 @DATE

PACKAGED ACCESSORIES

1	-	-	-
-	-	-	-
-	-	-	-

DATE: 11/12/07
 RELEASE DATE: CUSTOMER: JIG V
 DRAWN: JIG V
 CHECKED: APPROVED:

SIZE: C
 SCALE: NONE
 NAME: B2K0BTWZ37XKH