
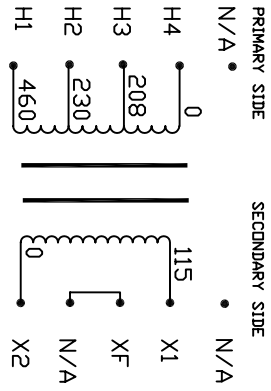
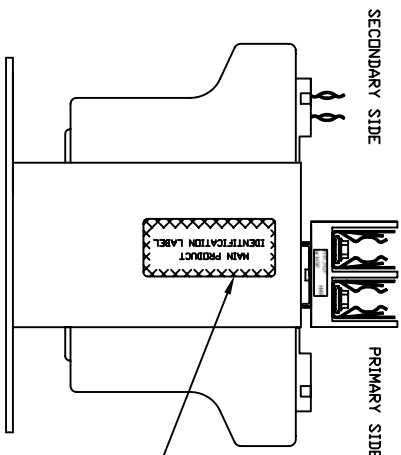
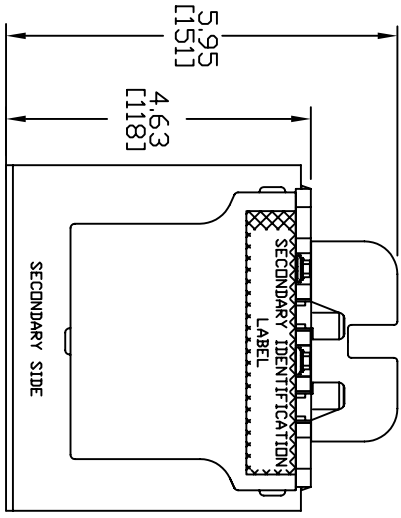


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	17.4 LBS

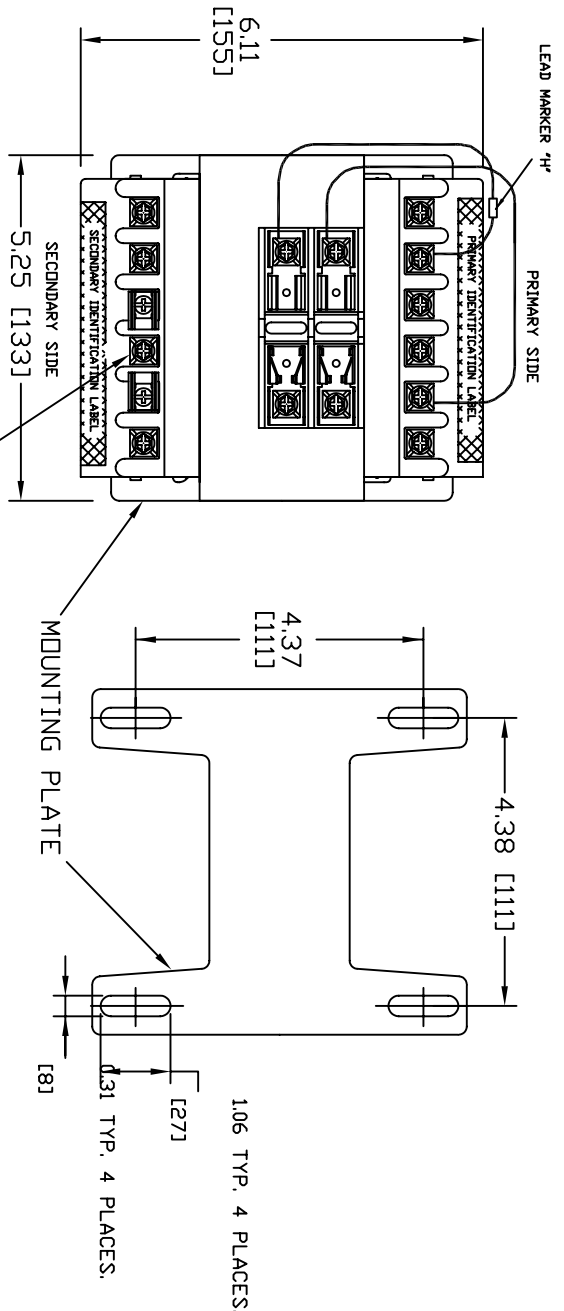

INTERNALLY JUMPED TO FUSE TERMINAL CONNECTION DIAGRAM

- NOTE:
1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

MAIN PRODUCT IDENTIFICATION LABEL

MICRON SCIENTIFIC EQUIPMENT DIVISION
 174 GARDNER STREET, WILMINGTON, DE 19805
 www.microntransformers.com

ImpervitrAN
 U.S. PAT. NO. 3516040


500VA 50/60Hz
 TEMP CL. 130°C

CAT. NO. B500MBT13RKF
 SERIES 2


UL US LISTED 702X

05094

PRIMARY IDENTIFICATION LABEL

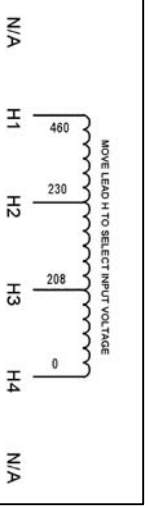

SECONDARY IDENTIFICATION LABEL

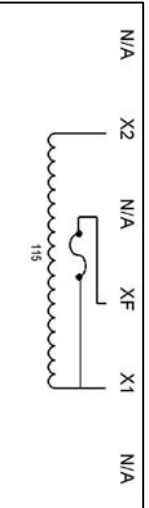

MICRON PART NO.	B500MBT13RKF
DATE	11/13/07
RELEASE DATE	
SWAN	J.G.V.
DESIGNED	
APPROVED	
MICRON	
SCALE	
SIZE	
C	
INDIC	
MICRON INDUSTRIES CORPORATION	
174 GARDNER STREET, WILMINGTON, DE 19805	
www.microntransformers.com	