

# IMC-P101 Series

## IEEE 802.3af PoE Ethernet-to-fiber media converters



### Features and Benefits

- 10/100BaseT(X) auto-negotiation and auto-MDI/MDI-X
- IEEE 802.3af-compliant PoE PSE equipment
- Power failure alarm by relay output
- Supports store-and-forward mode and pass-through mode
- -40 to 75°C operating temperature range (-T models)
- Redundant dual DC power inputs

### Certifications



## Introduction

IMC-P101 Ethernet-to-fiber media converters provide Ethernet media conversion from 10/100BaseT(X) to 100BaseFX (with SC or ST connectors). These converters are classified as power source equipment (PSE), and when used in this way, they provide up to 15.4 watts to IEEE 802.3af-compliant powered devices (PDs), eliminating the need for additional wiring. The IMC-P101 converters support IEEE 802.3/802.3u/802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing a complete solution for your industrial Ethernet network.

## Specifications

### Ethernet Interface

100BaseFX Ports (multi-mode SC connector)	IMC-P101-M-SC Series: 1
100BaseFX Ports (multi-mode ST connector)	IMC-P101-M-ST Series: 1
100BaseFX Ports (single-mode SC connector)	IMC-P101-S-SC Series: 1
100BaseFX Ports (single-mode ST connector)	IMC-P101-S-ST Series: 1

### Optical Fiber


		100BaseFX		
		Multi-Mode		Single-Mode
Fiber Cable Type	OM1	50/125 $\mu$ m	G.652	
		800 MHz x km		
Typical Distance		4 km	5 km	40 km
Wavelength	Typical (nm)	1300		1310
	TX Range (nm)	1260 to 1360		1280 to 1340
	RX Range (nm)	1100 to 1600		1100 to 1600

		100BaseFX		
		Multi-Mode		Single-Mode
		Fiber Cable Type	OM1	50/125 $\mu$ m
	800 MHz x km			
Optical Power	TX Range (dBm)	-10 to -20		0 to -5
	RX Range (dBm)	-3 to -32		-3 to -34
	Link Budget (dB)	12		29
	Dispersion Penalty (dB)	3		1
<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p>				
Magnetic Isolation Protection	1.5 kV (built-in)			
PoE Ports (10/100BaseT(X), RJ45 connector)	1			
<b>Power Parameters</b>				
Input Current	430 mA @ 46 to 57 VDC			
Input Voltage	46 to 57 VDC			
Overload Current Protection	Supported			
Power Consumption	430 mA @ 46 to 57 VDC			
<b>Physical Characteristics</b>				
Housing	Metal			
Dimensions	144.5 x 122.3 x 51.65 mm (5.69 x 4.81 x 2.03 in)			
Weight	710 g (1.56 lb)			
Installation	DIN-rail mounting			
<b>Environmental Limits</b>				
Operating Temperature	Standard Models: 0 to 60°C (32 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)			
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)			
Ambient Relative Humidity	5 to 95% (non-condensing)			
<b>Standards and Certifications</b>				
EMC	EN 55032/24			
EMI	CISPR 32, FCC Part 15B Class A			
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs			
Environmental Testing	IEC 60068-2-2 IEC 60068-2-3			

Safety	EN 60950-1, UL 60950-1
Vibration	IEC 60068-2-6
<b>MTBF</b>	
Time	435,210 hrs
Standards	Telcordia (Bellcore), GB
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x IMC-P101 Series converter
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

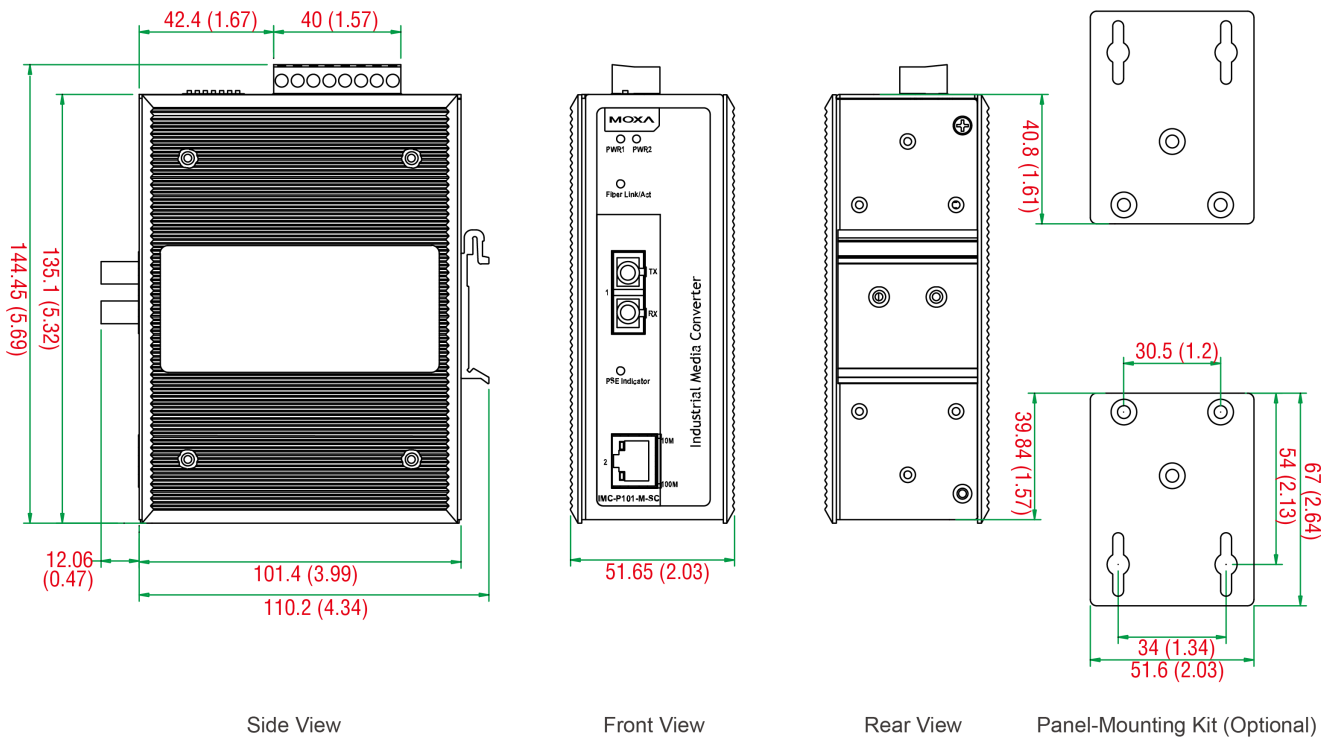

## Ordering Information

Model Name	Operating Temp.	Fiber Module Type
IMC-P101-M-SC	0 to 60°C	Multi-mode SC
IMC-P101-M-ST	0 to 60°C	Multi-mode ST
IMC-P101-S-SC	0 to 60°C	Single-mode SC
IMC-P101-S-ST	0 to 60°C	Single-mode ST
IMC-P101-M-SC-T	-40 to 75°C	Multi-mode SC
IMC-P101-M-ST-T	-40 to 75°C	Multi-mode ST

Model Name	Operating Temp.	Fiber Module Type
IMC-P101-S-SC-T	-40 to 75°C	Single-mode SC
IMC-P101-S-ST-T	-40 to 75°C	Single-mode ST

## Accessories (sold separately)

### Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

### Wall-Mounting Kits

WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm
-------	---

© Moxa Inc. All rights reserved. Updated Apr 14, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.