

INJ-24 Series

Gigabit IEEE 802.3af/at PoE+ injectors



Features and Benefits

- PoE+ injector for 10/100/1000M networks; injects power and sends data to PDs (power devices)
- IEEE 802.3af/at compliant; supports a full 30 watt output
- 24/48 VDC wide range power input
- -40 to 75°C operating temperature range (-T model)

Certifications



Introduction

The INJ-24 is a Gigabit IEEE 802.3at PoE+ injector that combines power and data and delivers them to a powered device over one Ethernet cable. Designed for use with power-hungry devices, the INJ-24 injector provides PoE of up to 30 watts. The -40 to 75°C (-40 to 167°F) operating temperature capability makes the INJ-24 ideally suited to operating in harsh industrial environments.

Specifications

Ethernet Interface

| | |
|---|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 1 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | 1 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed |
| PoE Pinout | V+, V+, V-, V-, for pins 4, 5, 7, 8 (Midspan, MDI, Mode B) |
| Standards | IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3af/at for PoE/PoE+ output |


Power Parameters

| | |
|--------------------------|---|
| Input Voltage | 24/48 VDC |
| Operating Voltage | 22 to 57 VDC |
| Input Current | 1.42 A @ 24 VDC |
| Power Consumption (Max.) | Max. 4.08 W full loading without PDs' consumption |
| Power Budget | Max. 30 W for total PD consumption Max. 30 W for each PoE port |
| Connection | 1 removable 3-contact terminal block(s) |

| | |
|--|--|
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Physical Characteristics | |
| Housing | Plastic |
| IP Rating | IP30 |
| Dimensions | 24.9 x 100 x 86.2 mm (0.98 x 3.93 x 3.39 in) |
| Weight | 115 g (0.26 lb) |
| Installation | DIN-rail mounting |
| Environmental Limits | |
| Operating Temperature | INJ-24: 0 to 60°C (32 to 140°F) INJ-24-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |
| Standards and Certifications | |
| Safety | UL 508, EN 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Freefall | IEC 60068-2-31 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |
| MTBF | |
| Time | 2,525,278 hrs |
| Standards | Telcordia (Bellcore), GB |
| Warranty | |
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |
| Package Contents | |
| Device | 1 x INJ-24 Series PoE+ injector |
| Documentation | 1 x quick installation guide 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese 1 x warranty card |

Dimensions

Unit: mm (inch)

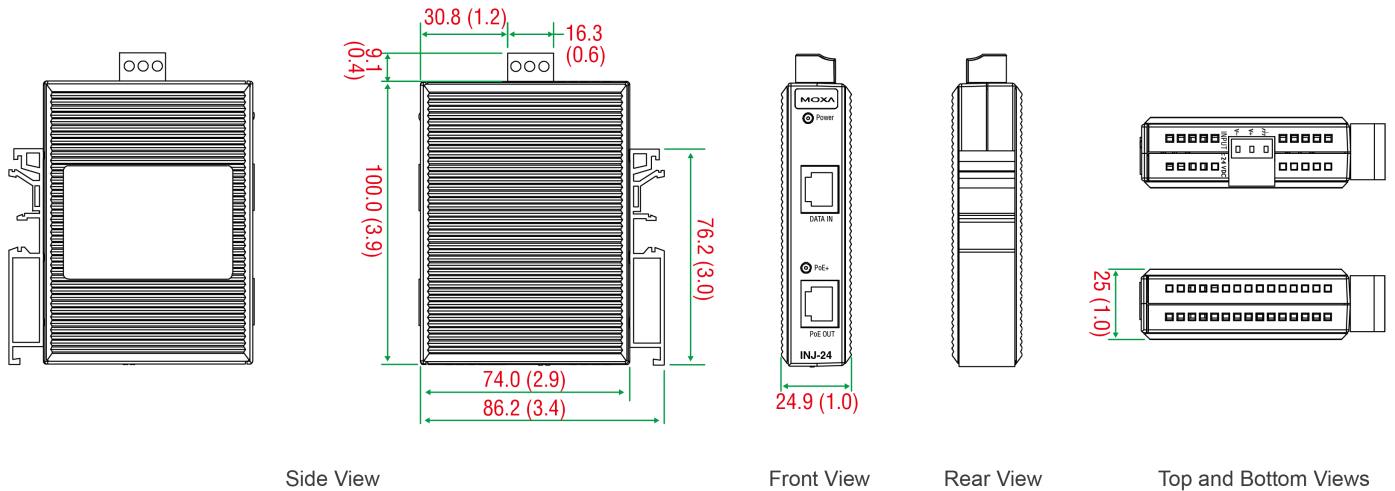

Ordering Information

| Model Name | 10/100/1000BaseT(X) Ports RJ45 Connector | PoE Ports, 10/100/1000BaseT(X) RJ45 Connector | Operating Temp. |
|------------|---|--|-----------------|
| INJ-24 | 1 | 1 | 0 to 60°C |
| INJ-24-T | 1 | 1 | -40 to 75°C |

Accessories (sold separately)

Power Supplies

| | |
|-------------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524 | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature |
| DR-75-24 | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature |
| DR-120-48 | 120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-75-48 | 75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
| DRP-240-48 | DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature |
| SDR-480P-48 | DIN-rail 48 VDC power supply with 480W/10A, 90 to 264 VAC, or 127 to 370 VDC input, (current sharing up to 3840 W), -25 to 70°C operating temperature |

Rack-Mounting Kits

| | |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.