


# CSM-400 Series

Managed 10/100BaseT(X) to 100BaseFX slide-in modules for the NRack System™

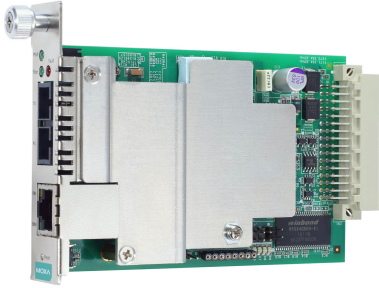

## Features and Benefits

- LFP (Link Fault Pass-Through) and FEF (Far End Fault)
- Supports store-and-forward mode and pass-through mode
- Auto-negotiation
- Supports IEEE 802.3AH OAM protocol
- Plug and play
- Hot-swappable
- IP-based remote management
- Supports WDM type modules

## Certifications



## Introduction

The CSM-400 Series consists of slide-in Ethernet-to-fiber managed media converters for the NRack System™. The modules provide media conversion from 10/100BaseT(X) to 100BaseFX (with SC/ST connectors), and can be installed in any NRack System™ chassis. The CSM-400 modules support LFP and FEF for easily tracing network link failures, and support store-and-forward and pass-through modes, 802.3AM OAM for remote management and monitoring, as well as WDM-type fiber modules to reduce fiber cable cost.

## Specifications

### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	1
100BaseFX Ports (multi-mode ST connector)	CSM-400-1213: 1 CSM-400-1213: 1
100BaseFX Ports (multi-mode SC connector)	CSM-400-1214: 1 CSM-400-1214-T: 1
100BaseFX Ports (single-mode SC connector)	CSM-400-1218: 1 CSM-400-1218-T: 1
100BaseFX Ports, WDM-A Single-Mode SC Connector	CSM-400-1224: 1 CSM-400-1224-T: 1
100BaseFX Ports, WDM-B Single-Mode SC Connector	CSM-400-1225: 1 CSM-400-1225-T: 1

### Optical Fiber

		100BaseFX WDM-A	100BaseFX WDM-A
		Single-Mode	Single-Mode
Fiber Cable Type		G.652	G.652
Typical Distance		20 km	20 km
Wavelength	Typical (nm)	1310/1550 nm	1550/1310 nm
	TX Range (nm)	1280 to 1340	1480 to 1600
	RX Range (nm)	1480 to 1600	1280 to 1340




		100BaseFX WDM-A	100BaseFX WDM-A
		Single-Mode	Single-Mode
Fiber Cable Type		G.652	G.652
Optical Power	TX Range (dBm)	-5 to -15	-5 to -15
	RX Range (dBm)	-3 to -32	-3 to -32
	Link Budget (dB)	17	17
	Dispersion Penalty (dB)	1	1
<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p>			
Magnetic Isolation Protection		1.5 kV (built-in)	
Standards		IEEE 802.3u for 100BaseT(X) and 100BaseFX	
<b>Security Functions</b>			
Authentication		Local database (password only)	
Encryption		HTTPS AES-128 RSA-1024 SHA-1 SHA-256	
Security Protocols		SSHv2 HTTPS (TLS 1.2)	
<b>Power Parameters</b>			
Input Current		220 mA @ 12 VDC	
Input Voltage		12 VDC	
Overload Current Protection		Supported	
Power Consumption		220 mA @ 12 VDC	
<b>Physical Characteristics</b>			
Dimensions		86.8 x 124.3 x 21 mm (3.42 x 4.89 x 0.83 in)	
Weight		CSM-400-1213/1214/1218 Series: 115 g (0.25 lb) CSM-400-1224/1225 Series: 125 g (0.28 lb)	
<b>Environmental Limits</b>			
Operating Temperature		Standard Models: -20 to 55°C (-4 to 131°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)	
Storage Temperature (package included)		-40 to 85°C (-40 to 185°F)	
Ambient Relative Humidity		5 to 95% (non-condensing)	
<b>Standards and Certifications</b>			
EMC		EN 55032/35	
EMI		CISPR 32, FCC Part 15B Class A	
EMS		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV	

	IEC 61000-4-5 Surge: Power: 2 kV(AC), 1 kV(DC); Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Environmental Testing	IEC 60068-2-1 IEC 60068-2-14 IEC 60068-2-2 IEC 60068-2-3
Safety	EN 62368-1 UL 62368-1
Vibration	IEC 60068-2-6
<b>MTBF</b>	
Time	1,454,560 hrs
Standards	Telcordia (Bellcore), GB
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x CSM-400 Series module
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions





### CSM-400-1213

Unit: mm (inch)

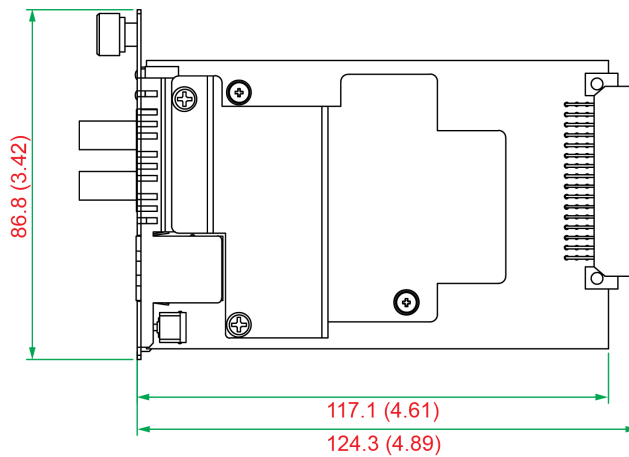





## CSM-400-1214, CSM-400-1218

Unit: mm (inch)

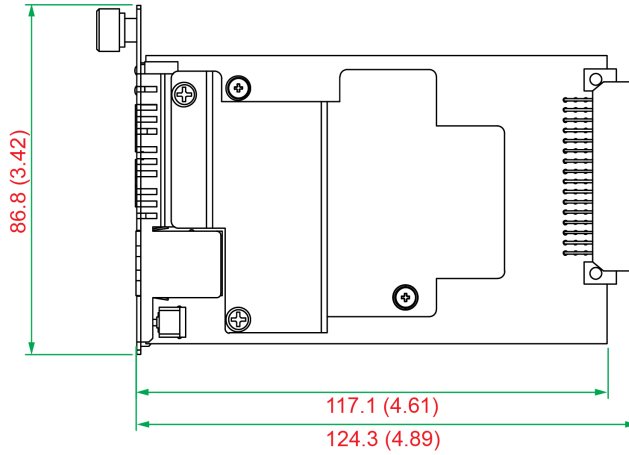

## CSM-400-1224, CSM-400-1225

Unit: mm (inch)

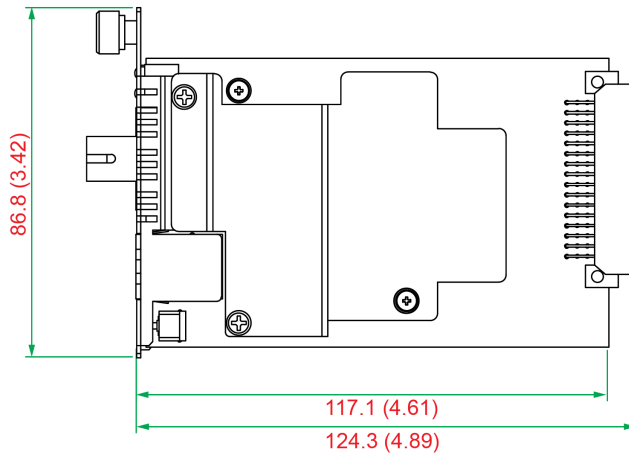

## Ordering Information

Model Name	Operating Temp.	Fiber Module Type
CSM-400-1213	-20 to 55°C	Multi-mode ST
CSM-400-1213-T	-40 to 75°C	Multi-mode ST
CSM-400-1214	-20 to 55°C	Multi-mode SC
CSM-400-1214-T	-40 to 75°C	Multi-mode SC
CSM-400-1218	-20 to 55°C	Single-mode SC

Model Name	Operating Temp.	Fiber Module Type
CSM-400-1218-T	-40 to 75°C	Single-mode SC
CSM-400-1224	-20 to 55°C	WDM-A single-mode SC
CSM-400-1224-T	-40 to 75°C	WDM-A single-mode SC
CSM-400-1225	-20 to 55°C	WDM-B single-mode SC
CSM-400-1225-T	-40 to 75°C	WDM-B single-mode SC

© Moxa Inc. All rights reserved. Updated Nov 23, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.