

# OnCell G3110/G3150-HSPA Series

**Industrial five-band GSM/GPRS/EDGE/UMTS/HSPA high performance IP gateways with VPN**



- > Five band UMTS/HSPA 800/850/AWS/1900/2100MHz
- > Quad-band GSM/GPRS/EDGE 850/900/1800/1900 MHz
- > Connect to Ethernet and serial devices over an integrated VPN
- > Centralize private IP management software with OnCell Central Manager
- > Redundant DC power inputs
- > 2 digital inputs and 1 relay output



## Overview

The OnCell G3110/G3150-HSPA series of high-speed industrial-grade IP gateways are intelligent and fully-featured wireless communication platforms that connect your Ethernet and serial devices over a cellular TCP/IP network. The OnCell G3110/G3150-HSPA series offer connectivity to all tri HSPA+/UMTS frequency bands and quad GSM/GPRS/EDGE frequency bands used in Europe, the United States, and Japan, allowing seamless global roaming on the best available

network. The OnCell G3110/G3150-HSPA come with private IP management software and support VPN for handling the IP address issue in cellular network structures. The OnCell G3110/G3150-HSPA also have a built-in relay output that can be configured to indicate the priority of events when notifying or warning engineers in the field. Two digital inputs also allow you to connect basic I/O devices, and the OnCell G3110/G3150-HSPA comes with redundant power inputs to assure non-stop operation.

## Specifications

### Cellular Interface

**Standards:** GSM/GPRS/EDGE/UMTS/HSPA

**Band Options:**

- Five band UMTS/HSPA 800/850/AWS/1900/2100 MHz
- Quad-band GSM/GPRS/EDGE 850/900/1800/1900 MHz

**HSPA Data Rate:** 14.4 Mbps DL, 5.76 Mbps UL

**EDGE Multi-slot Class:** Class 12

**EDGE Terminal Device Class:** Class B

**GPRS Multi-slot Class:** Class 12

**GPRS Terminal Device Class:** Class B

**GPRS Coding Schemes:** CS1 to CS4

**Tx Power:**

GSM900: 2 W

UMTS/HSPA: 0.25 W

EDGE900: 0.5 W

EDGE1800: 0.4 W

GSM1800: 1 W

### LAN Interface

**Number of Ports:** 1

**Ethernet:** 10/100 Mbps, RJ45 connector, Auto MDI/MDIX

**Magnetic Isolation Protection:** 1.5 KV built-in

### SIM Interface

**Number of SIMs:** 1

**SIM Control:** 3 V

### Serial Interface

**Number of Ports:** 1

**Serial Standards:**

G3110: RS-232 (DB9 male connector)

G3150: RS-232 (DB9 male connector), RS-422/485 (5-pin terminal block connector)

**ESD Protection:** 15 KV

**Power EFT/Surge Protection:** 2 KV

### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2 (when parity = None)

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** RTS/CTS, XON/XOFF

**Baudrate:** 50 bps to 921.6 Kbps

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

**RS-422:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-2w:** Data+, Data-, GND

### I/O Interface

**Alarm Contact:** 1 relay output with current carrying capacity of 1 A @ 24 VDC

**Digital Inputs:** 2 electrically isolated inputs

- +13 to +30 V for state "1" (On)

- +3 to -30 V for state "0" (Off)

### Software

**Network Protocols:** ICMP, TCP/IP, UDP, DHCP, Telnet, DNS, SNMP, HTTP, SMTP, HTTPS, SNT, ARP, SSL, RTSP, IPSec

**Router/Firewall:** NAT, port forwarding

**Authentication:** Local user-name and password

**Security:** Accessible IP list

**Operation Modes:** Real COM, Secure Real COM, Reverse Real COM, Secure Reverse Real COM, TCP Server, Secure TCP Server, TCP Client, Secure TCP Client, UDP, RFC2217, Ethernet Modem, SMS Tunnel  
**Configuration and Management Options:** SNMP MIB-II, SNMP Private MIB, SNMPv1/v2c/v3, DDNS, IP Report, Web/Telnet/Serial-Console/SSH  
**Utilities:** Provided for Windows 2000/XP/2003/Vista/7/Server 2008, Windows XP/2003/Vista/7/Server 2008 x64 Edition  
**Windows Real COM Drivers:** Windows 2000/XP/2003/Vista/7/Server 2008, Windows XP/2003/Vista/7/Server 2008 x64 Edition  
**Fixed TTY Drivers:** SCO Unix, SCO OpenServer 5, SCO OpenServer 6, UnixWare 7, SVR4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD 5, FreeBSD 6

**Linux Real TTY Drivers:** Linux kernels 2.2.x, 2.4.x, 2.6.x

**Management Software**

**OnCell Central Manager:** Centralized management solution for accessing private IPs from the Internet

**Physical Characteristics**

**Housing:** Aluminum, providing IP30 protection  
**Weight:** 440±5 g  
**Dimensions:** 125.5 x 28.0 x 92.5 mm (4.94 x 1.10 x 3.64 in)

**Environmental Limits**

**Operating Temperature:**  
 • Standard Models: -30 to 55°C (-22 to 131°F)  
 • Wide Temp. Models: -30 to 70°C (-22 to 158°F)  
**Storage Temperature:** -40 to 75°C (-40 to 167°F)  
**Ambient Relative Humidity:** 5 to 95% (30°C, non-condensing)

**Power Requirements**

**Number of Power Inputs:** 2 (terminal block)  
**Input Voltage:** 12 to 48 VDC  
**Power Consumption:** 12 to 48 VDC, 400 mA (idle), 900 mA (max.)

**Standards and Certifications**

**Safety:** UL 60950-1  
**EMC:** EN 55022 Class A, EN 55024, FCC Part 15 Subpart B Class A  
**Radio:** FCC Part 22H, FCC Part 24E, EN 301 489-1, EN 301 489-7, EN 301 489-24, EN 301 511

**Reliability**

**MTBF (mean time between failures):** 380,000 hrs

**Warranty**


**Warranty Period:** 5 years  
**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

**Dimensions & Pin Assignment**


Unit: mm (inch)

**OnCell G3110-HSPA Series**

**OnCell G3150-HSPA Series**

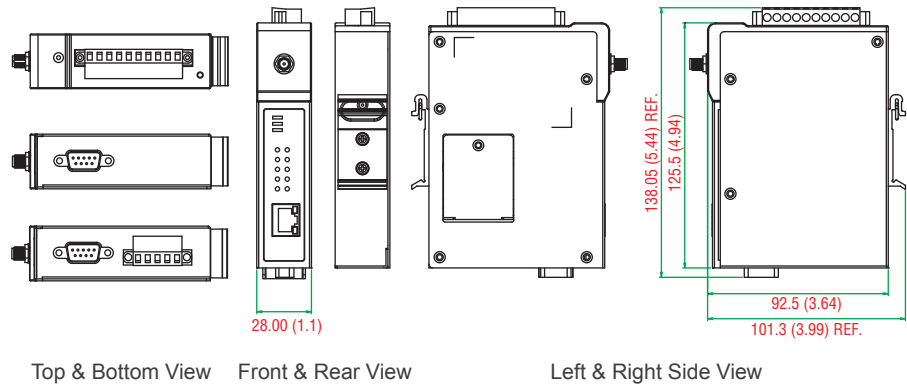

**DB9 male connector**



PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-
9	-	-	-

**Ordering Information**

**Available Models**

**OnCell G3110-HSPA:** 1-port RS-232 to GSM/GPRS/EDGE/UMTS/HSPA IP gateway with VPN, -30 to 55°C operating temperature  
**OnCell G3150-HSPA:** 1-port RS-232/422/485 to GSM/GPRS/EDGE/UMTS/HSPA IP gateway with VPN, -30 to 55°C operating temperature  
**OnCell G3110-HSPA-T:** 1-port RS-232 to GSM/GPRS/EDGE/UMTS/HSPA IP gateway with VPN, -30 to 70°C operating temperature  
**OnCell G3150-HSPA-T:** 1-port RS-232/422/485 to GSM/GPRS/EDGE/UMTS/HSPA IP gateway with VPN, -30 to 70°C operating temperature  
**Note:** Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

**Package Checklist**

- OnCell IP gateway
- Rubber SMA antenna
- DIN-Rail kit
- Documentation and software CD
- Quick installation guide
- Warranty card

**Note:** An activated SIM card (not included) must be provided by a third party Cellular Service Provider